

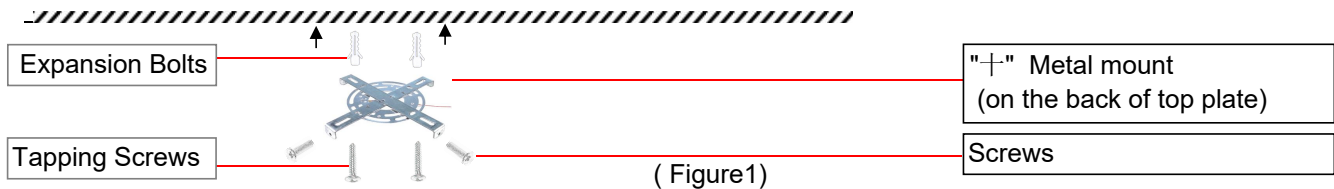


ITEM NO.#9002-3 INSTALLATION INSTRUCTION

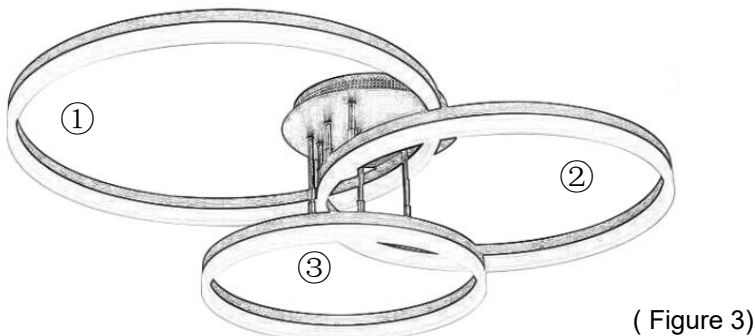


Please refer to the detailed instructions on page 2 for installation of metal mount

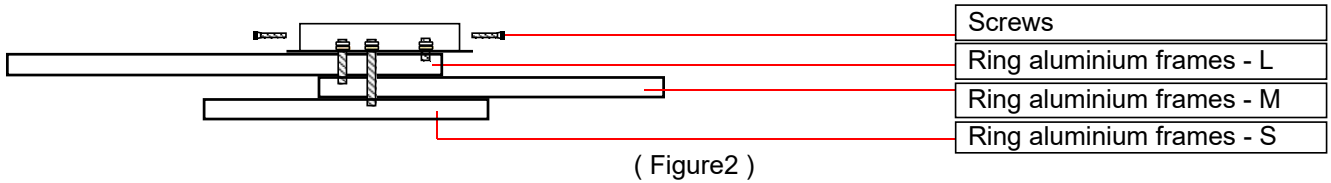

Combine the frames:
Put the screws on the wire into the hole of top plate and lock the nuts.
Please note that 2 screws are required for each frame.

The rest screws are in the accessory bag on the back of the top plate.

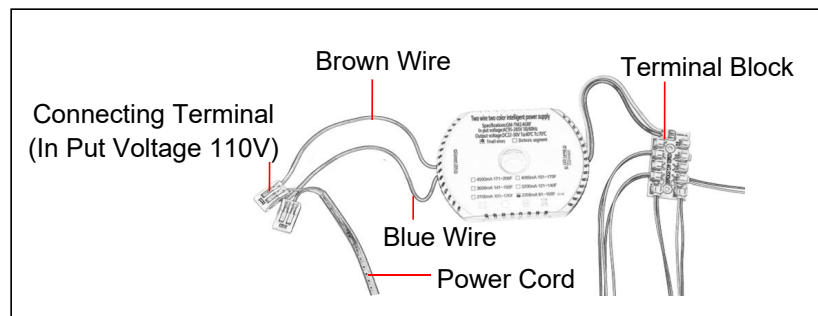

(Figure 4: Plug and Driver)

Installation Steps:

1. Install the "+" metal mount, Please refer to the detailed instructions on page 2.
2. Remove the protective film wrapped on the lamp body, do not use knives or sharp instrument, so as not to scratch the light body or wire insulation layer.
3. Combine the Ring frames in fixed on the top plate according to the shown in figure 3.
4. Test circuit: Connect the power wires with a temporary wire for testing if the light is working properly before install it to the ceiling.
5. Installation: Fix the lamp body to the cross metal mount, connect the power wires with the connecting terminals.
6. Turn on the power and double check again, the installation is complete.

Warning!

- 1) Please install by professional.
- 2) The voltage available for 110-260V only.
- 3) Don't install the lighting fixture under moist condition.
- 4) Please switch off the power when you cleaning the lighting fixture.
- 5) Keep away from acidic & corrosive material.



Pull the orange clip up to 90 degrees, and insert the wire,
then pull the clip down and wire will be clamped tightly

(figure 5)