


LG529-ESAB Finish(B) ☐

LG529-ESAC Finish(C) ☐

LG529-ESAS Finish(S) ☐

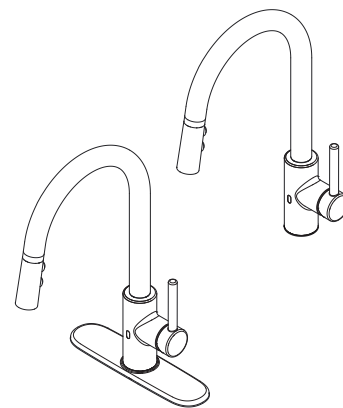

Specifications

Features

- 1.8 GPM Flow Rate
- React™ Touch-Free Technology
- 3 Function Pull-Down Sprayer
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 16" Extended Pull-Down Hose Length
- AccuDock™ Sprayhead Docking
- Smart Stop
- Low Battery Indicator

- Manual Override
- Forward Handle Operation
- Pfast Connect™
- Includes AC Adapter
- Optional Battery Pack, Order 952-007
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF 61/9 AnnexG Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)




Dimensions

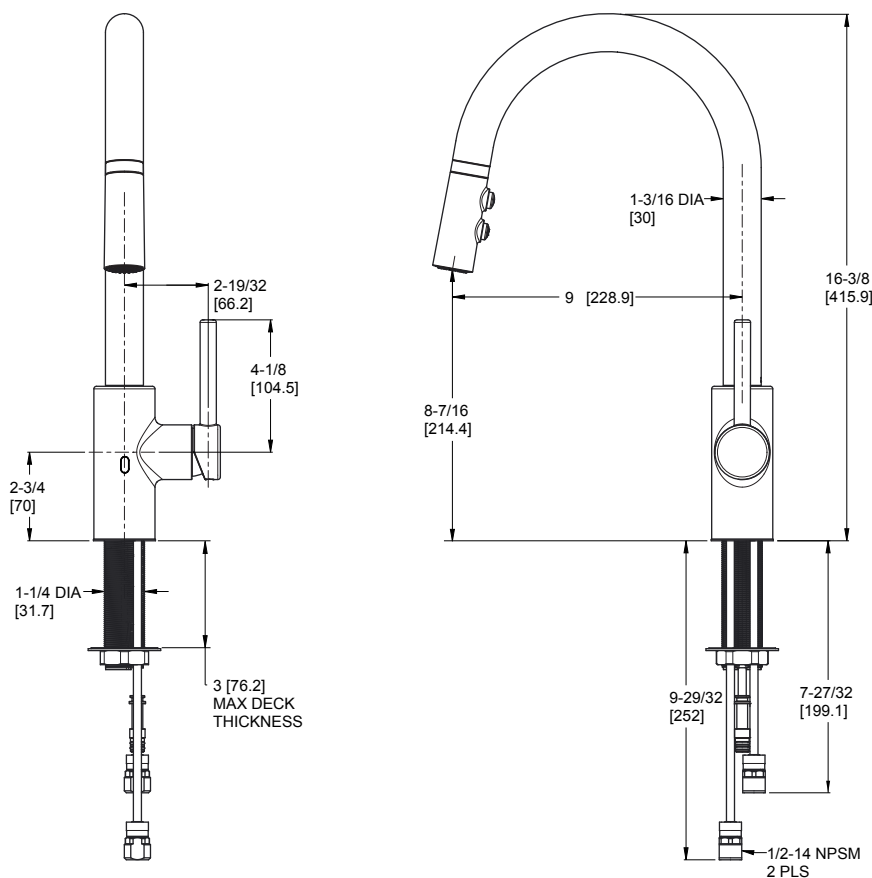


Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Deckplate

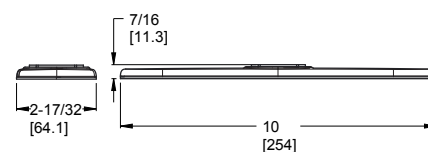

Control Box

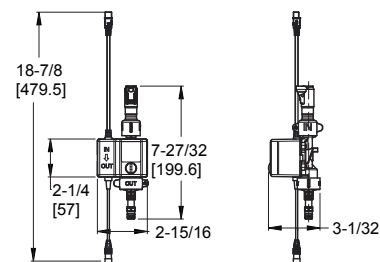

AC Adapter

