

## Low Profile/Narrow Wrap

### 80803 / 184346 / 184349

#### Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a clear prismatic lens. It can be used in various applications including garages, kitchens and utility spaces. Fixture mounts to standard junction box (not included). For residential use.



#### Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

#### Finish

Housing is finished in lighting grade white baked gloss enamel paint.

#### Diffuser

Acrylic diffuser is .060" thick prismatic diamond pattern 12 on the face with linear prisms on the sides. Diffuser rests in position on the continuous housing flange, it is removed by a lift and shift motion.

#### Electrical

This unit is wired with UL listed instant start, electronic normal power factor residential grade ballast for 120V/60 Hz AC operation.


#### Lamping

For use with 2/17 watt T8, 2/32 watt T8, 4/32 watt T8; lamps supplied by others.

#### Certification

All fixtures are cULus listed for damp locations.

Specifications and dimensions  
subject to change without notice.

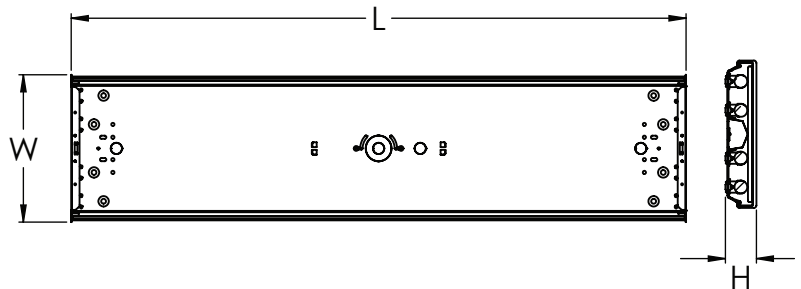

## Ordering Information:

| Model # | Qty. | Lamp  | H    | W     | L       |
|---------|------|-------|------|-------|---------|
| 80803   | 2    | F17T8 | 2.5" | 7"    | 24.125" |
| 184346  | 4    | F32T8 | 2.5" | 11.5" | 48.125" |
| 184349  | 2    | F32T8 | 2.5" | 7"    | 48.125" |