

FEATURES & SPECIFICATIONS

INTENDED USE

Provides an LED lighting platform to deliver general or task lighting for residential and light commercial applications. Light engine delivers long life and excellent color to ensure a quality, low-maintenance light installation. Ideal for use in bathrooms, lavatories, hallways, corridors, stairways, utility areas and more.

CONSTRUCTION

The Contemporary Square Vanity is constructed of a polycarbonate diffuser with housings available in either a brushed nickel, bronze, or chrome finish. The included canopy/junction box cover is removable for a more low-profile look (2'-4' lengths only). The white diffuser provides even illumination and softens the appearance of the LEDs for improved aesthetics.

OPTICS

The FMVCSLS Contemporary Square Vanity has an integrated switch to select 3000K, 3500K or 4000K color temperature at the time of installation.

1' delivers 750 lumens, 2' delivers 1550 lumens, 3' delivers 2350 lumens, and 4' delivers 2960 lumens at 3000K CCT with 50,000 hours of life. See table below for delivered lumens at the different CCT color switch settings.

Extruded polycarbonate diffuser is of highly transmissive material to minimize LED image and provides high-angle brightness control.

ELECTRICAL

Long-life LEDs, coupled with a multivolt and dual dimmable capable driver, provide extended service life. Standard input = 9.5 watts, (1'); 18 watts, (2'); 27 watts, (3'); 36 watts, (4'). Fixture is rated to deliver L70 performance at 50,000 hours and operates at 120-277 volts.

This fixture is dimmable by either triac or 0-10V dimming. Use with approved triac or 0-10v dimmer only.

LISTINGS

UL Listed to US and Canadian safety standards. Listed for damp locations. Can be used to comply with California Title 24 Part 6 JA8 High Efficacy LED Light Source Requirements.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

SPECIFICATIONS	1FT	2FT	3FT	4FT
Length	12-9/16 (320)	21-7/16 (545)	33-1/4 (845)	45-1/16 (1145)
Weight	1.55 (.70)	2.15 (.98)	2.55 (1.16)	3.15 (1.43)
3000K Lumens (LPW)	750 (79)	1550 (87)	2350 (88)	2960 (84)
3500K Lumens (LPW)	815 (88)	1725 (99)	2550 (98)	3240 (94)
4000K Lumens (LPW)	830 (87)	1740 (96)	2560 (93)	3200 (89)


All dimensions are inches (millimeters) unless otherwise indicated. Weights are pounds (kilograms).

Catalog Number
Notes
Type


Decorative Indoor

Contemporary Square Vanity with Switchable White Color Temperature

VANITY LED

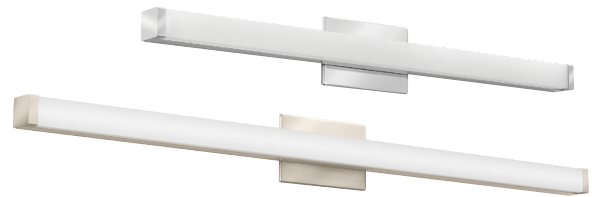

ADA

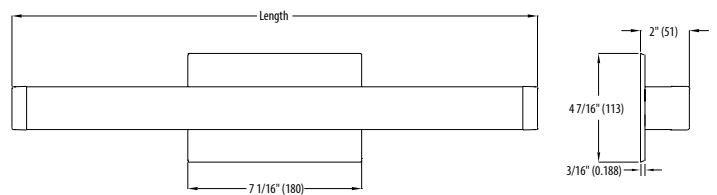

ORDERING INFORMATION

Example: FMVCSLS 24IN MVOLT 30K35K40K 90CRI BZ

Series	Length	Voltage	Color temperature	CRI	Finish
FMVCSLS Contemporary Square Vanity	12IN ¹ 1' Nominal 24IN 2' Nominal 36IN 3' Nominal 48IN ² 4' Nominal	MVOLT MVOLT (120V-277V)	30K35K40K	90CRI >90	BN Brushed Nickel KR Chrome BZ Bronze

Notes

1 Not available in KR (Chrome) finish.


2 Not available in BZ (Bronze) finish.

LED Vanity Contemporary Square


PHOTOMETRICS

Distribution Curve	Distribution Data	Output Data	Coefficient of Utilization	Illuminance Data at 30" Above Floor for a Single Luminaire
--------------------	-------------------	-------------	----------------------------	--


FMVCSLS 12IN, input watts: 9.53, test no. ISF 37690

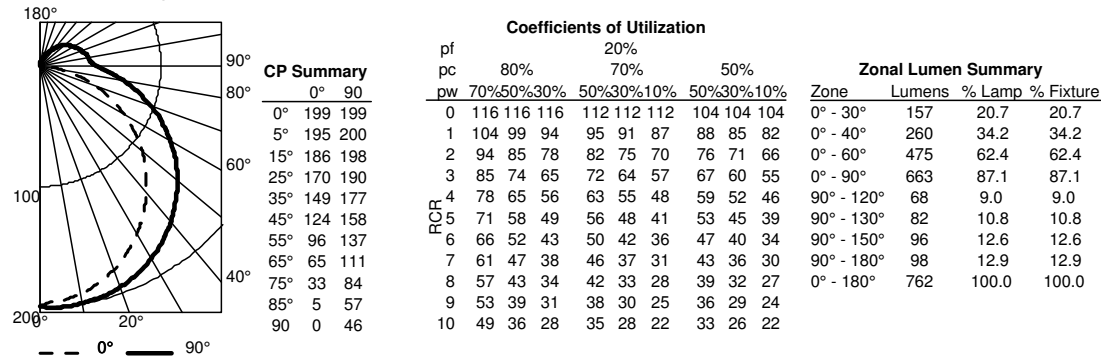


FMVCSLS 24IN, input watts 17.92, test no. ISF 37690

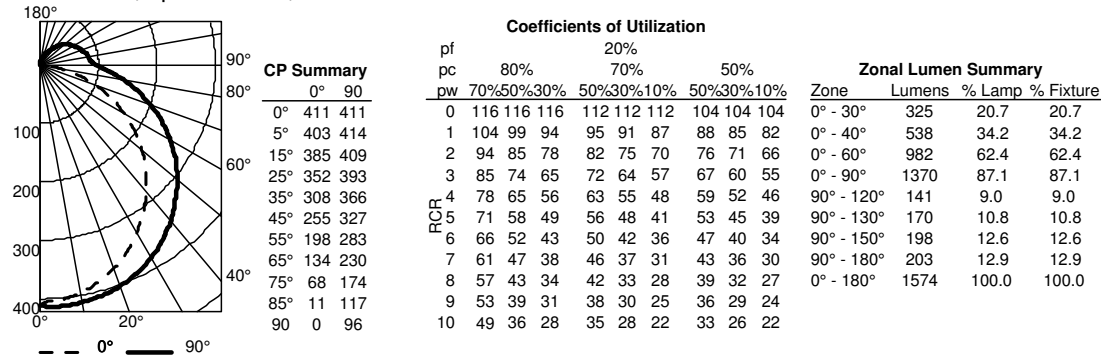

FMVCSLS 36IN, input watts: 26.64, test no. ISF 37690

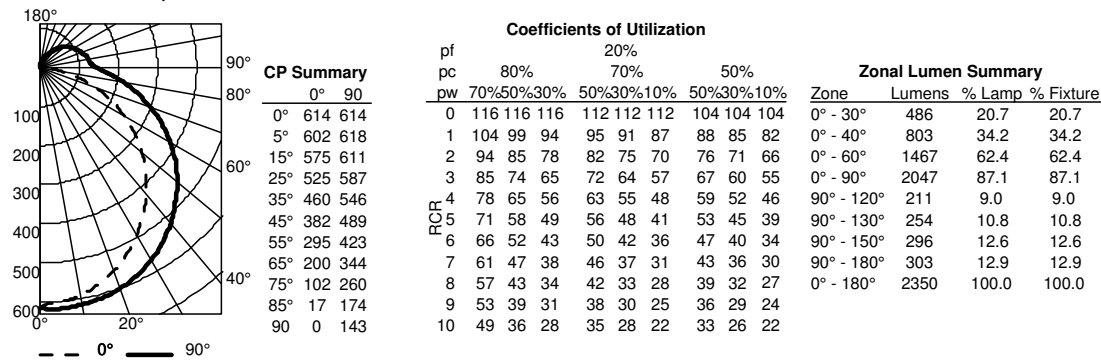

FMVCSLS 48IN, input watts 35.18, test no. ISF 37690

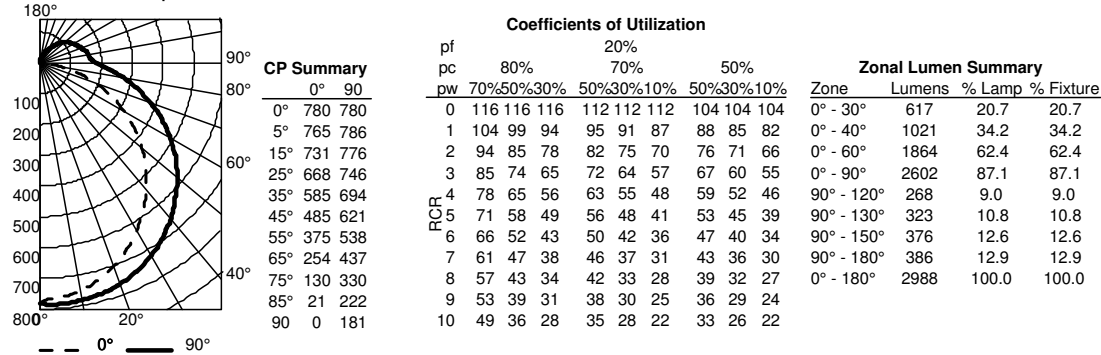

LED Vanity Contemporary Square

COMPATIBLE DIMMERS	
The FMVCSLS is designed to operate with most standard Triac Based dimmers and is compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.	
Manufacturer	Part number(s)
Lutron	DVELV-300P
	300P SELV
	NTELV-300P
	NLV-600
Leviton	6633-PA
	6615-P
Synergy/Leviton	ISD 400 ELV 120 / IPE04