



TUFTEX[®] Multi-Wall[™]

6mm polycarbonate multi-wall building panel

BENEFITS

STRONG

SHATTER PROOF

IMPACT RESISTANT

LIGHTWEIGHT


FLEXIBLE

CLASS A FIRE RATING


**TIP: PREDRILL 1/8" - 3/16"
LARGER THAN DIAMETER OF
FASTENER
(9/32" for TUFTEX 2" Fasteners)**

TECHNICAL CHARACTERISTICS

Length	96-in
Width	48-in
Thickness	6mm
Weight	8.5 lb
Cutting	Circular saw with 80+ teeth (rated for plastic cutting)
Minimum slope required	1:12; Increase in heavy snow areas
Cross brace support structure	24-in on center
Thermal Transmittance	U-value = .61
Thermal Resistance	R-value = 1.631
Light Transmission	80%
Fire Rating	ASTM E84 Class A

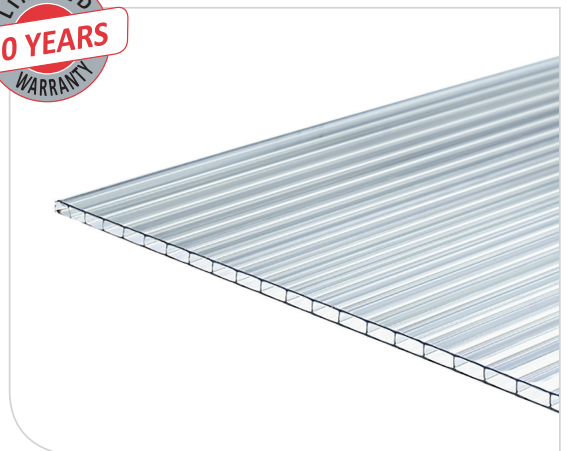

TUFTEX ACCESSORIES



TUFTEX Universal Ridge & Trim - Clear
51"x18" (48" Coverage)
Model #1438H



Anti-Dust Tape
Solid & Vented (1" x 32 yards)
Model #855



2" TUFTEX Fastener
Galvanized w/ Washer (50/box)
Model #849



TUFTEX U-Channel Profile
Seals top & bottom of panels
96" long
Model #853



TUFTEX H-Channel Profile
Joins two panels side by side
96" long
Model #854

