

# Technical Data Sheet

T06203 - V01 - 03-2019 - NA01

## ONDURA® PREMIUM SERIES RIDGE-VERGE ACCESSORY B100

### Material / Application

Lightweight bitumen accessory designed for all buildings covered with ONDURA® roofing system to provide a weatherproof seal at the ridge and at the verge.

Bitumen material reinforced with cellulosic fibers and thermosetting resin. The composite is colored with inorganic pigments.


### Technical characteristics

Length	L	39.5 inches
Width at 0°	w	16 inches
Flat width	Fw	1/8 inch
Height of accessory	H	NA
Thickness	t	1/8 inch
Surface		4.4 ft <sup>2</sup>
Weight		2.4 lbs
Weight per m <sup>2</sup>		0.5 lb/ft <sup>2</sup>


#### MECHANICAL & PHYSICAL PROPERTIES

Tearing strength	≥ 200 N
Proportion of bitumen	> 40%
Homogeneity	Pass <sup>1</sup>
Water absorption	< 20%
Tearing Strength	≥ 200 N
Thermal Coefficient	< 100.10-6 1/K


<sup>1</sup> No area larger than 1 cm<sup>2</sup> without bitumen

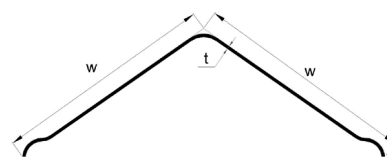


### Color




Red



Green



Brown



Black

### Estimating

$$\text{Number of Ridges for Project} = \frac{\text{Total Ridge Length (inches)} + 8 \text{ inches}}{32.5 \text{ inches}}$$

### Installation

Special conditions for this installation are required. Please refer to the installation guide.

[Onduline-usa.com](http://Onduline-usa.com)

Onduline North America, Inc.  
4900 Ondura Drive  
Fredericksburg, VA 22407  
United States of America

This Technical Data Sheet was made based on currently available information as of May 14, 2020. Product was made in accordance with above mentioned parameters, but producer/distributor can't anticipate any future change or any changes in regulations. It is the consumer's responsibility to use the product in accordance to producer/distributor recommendations and their needs. All the claims will be considered with respect to application recommendations issued by Onduline North America, Inc.

**Onduline®**  
Lightweight roofing systems