

Widespread bathroom sink faucet, 1.2 gpm K-R33048-4D

## Features

- Two Lever handles offer separate control of hot and cold water
- KOHLER<sup>®</sup> ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate
- Box includes: Assembled faucet, clicker drain
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

### Material

- Premium material construction for durability and reliability
- Spot Repel<sup>®</sup> finish resists fingerprints, smudges, and water spots (Matte Black finish only)
- Select KOHLER finishes feature ScratchShield<sup>®</sup> technology which withstands even the toughest daily use

# Installation

- For 8" 16" (203 406 mm) centers
- Simplified faucet installation; mounting hardware requires no special tools

# **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner





# Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**

СР	Polished Chrome
BN	Vibrant® Brushed Nickel
BL	Matte Black
2MB	Vibrant® Brushed Moderne Brass




**Avail**®

# Avail®

# **KOHLER**, Faucets

# Widespread bathroom sink faucet, 1.2 gpm K-R33048-4D

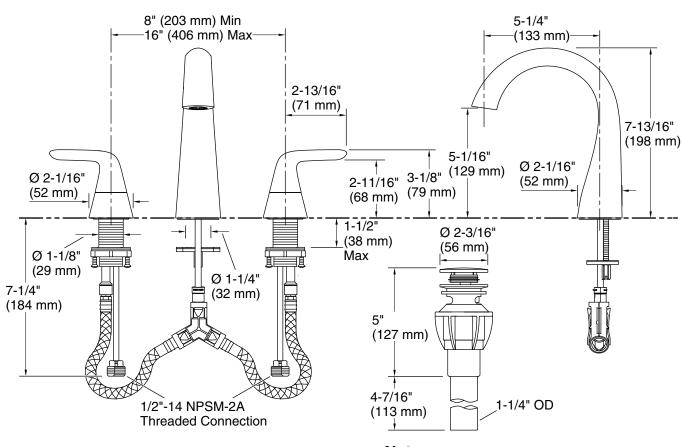

# **Technical Information**

All product dimensions are nominal.

# Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
------------	-------------------------

Drain included:

Yes

# Spout:

Spout reach:

5-1/4" (133 mm)

# Handshower:

Rated maximum flow:

0 gal/min (0 l/min)

# Notes

Install this product according to the installation instructions.

ADA complaint for faucet handles only. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

