Mirror introduction

Bathroom mirror with Light



Usage Method:



Short press the switch : on/off Quick press the switch : switch the light color

Long press the switch: Infinitely

adjust the brightness



Short press the anti-fog button: on/off the anti-fog



Screw*2 Expansion screw*2


InstallationInstruction

Before Installation

- Please make sure that the installed wall is a load bearing wall.
- Please check to avoid wires or water pipes when drilling.


Wiring Instructions





Cut out the plug and the reserved wire connection port, which can be hidden on the back of the mirror

The mirror plug is directly plugged into the wall socket for use (the socket cannot be on the back of the mirror)

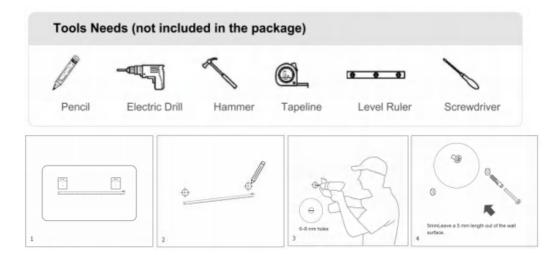

- 1. Measure the hanger spacing Measure the distance between 2hangers with a tape measure
- 2. Mark drilling locations Determine the specific locations ofdrilling with a tape measure, andmark it out with a pencil.
- 3. Drill holes with a percussion drill Drill 6-8 mm holes in the wall atmarked locations with a percussiondrill.
- 4. Put an expansion tube into eachhole and put a screw into each tube Strike expansion tubes into drill holes with a hammer and put screws into expansiontubes with a screwdriver. Leave a 5 mmlength out of the wall surface

More attention:

- Please take care to ensure that all metal parts are kept away from electricity
- 2. For indoor use only.



Fragile Handle with care

Note:

The product is fragile. Be careful during unpacking and installation.

The product works from -45°C to + 35°C. The product should be cleaned by standar detergents and soft cotton cloth.