







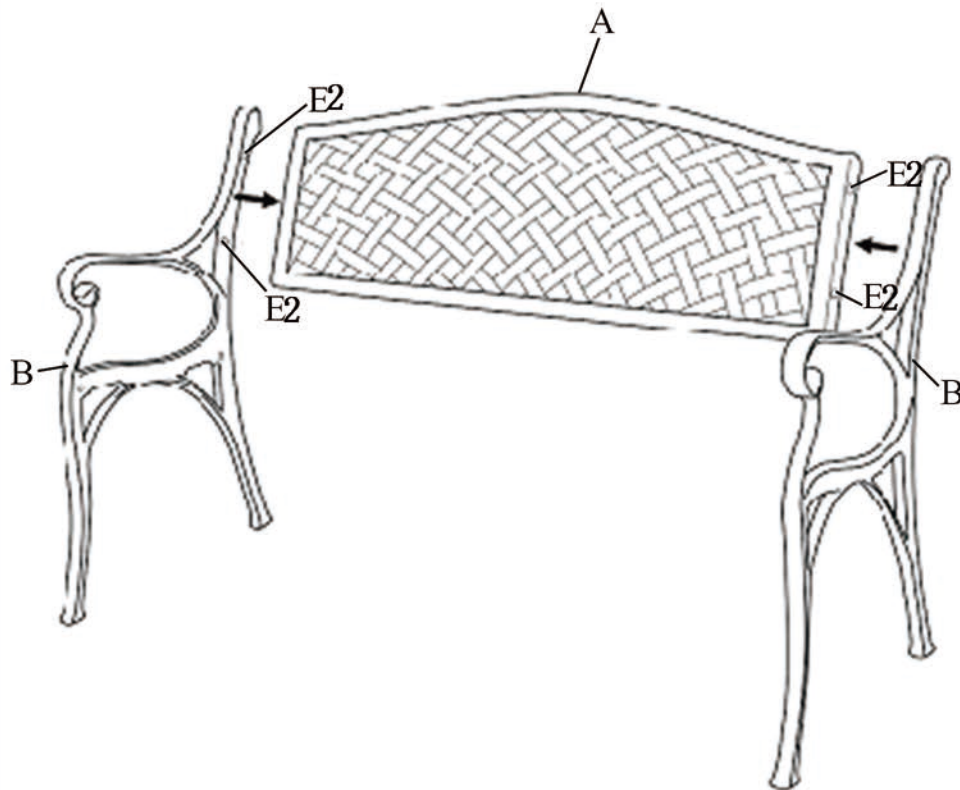


# ASSEMBLY INSTRUCTION

## 41.5 INCH OUTDOOR BENCH

							
Backrest A x 1pc	Armrest B x 2pcs	Seat plate C x 1pc	Wrench D x 1pc	Bolt E1 M8X30 4pcs	Bolt E2 M8X15 4pcs	Nut F x 4pcs	Washer G x 4pcs


### Step 1



Attach the backrest (A) to the 2 armrests (B) first with 4 bolts (E2).


Note: The front side of the backrest is smoother and flatter.

### Step 2

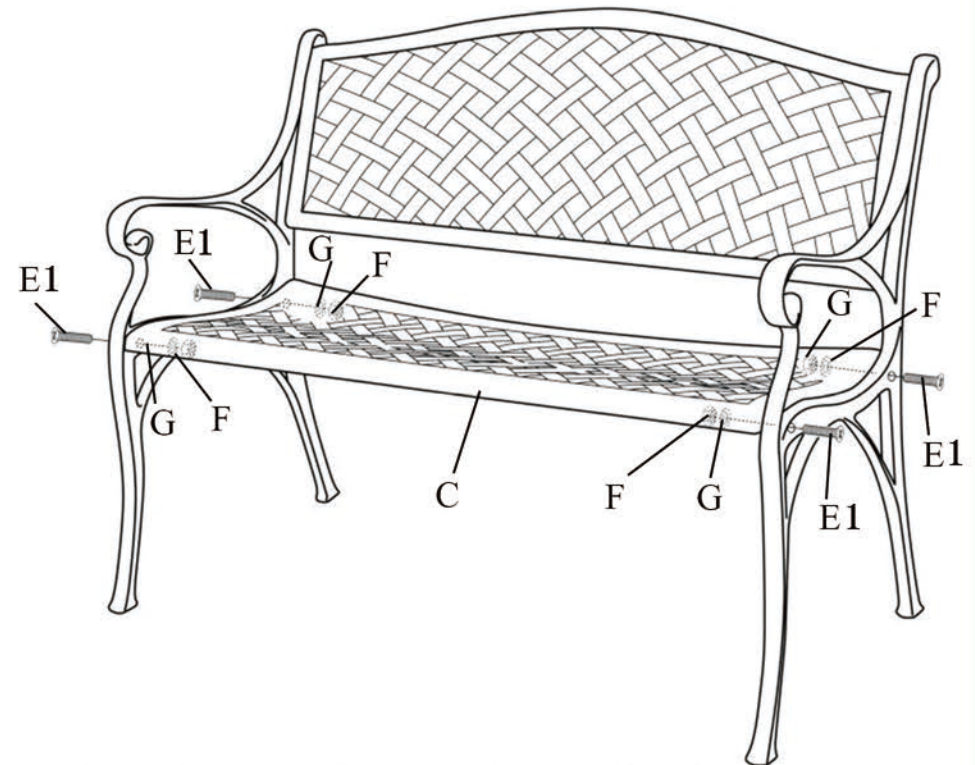

Attach the seat plate (C) to the 2 armrests (A) with 4 bolts (E1) x 4 washers (G) x 4 nuts (F). It's hard to install them by hand, you need to use wrench for the better installation.

Note: Please distinguish the upper side of the seat plate before installing. The smoother and flatter side is the upper side.

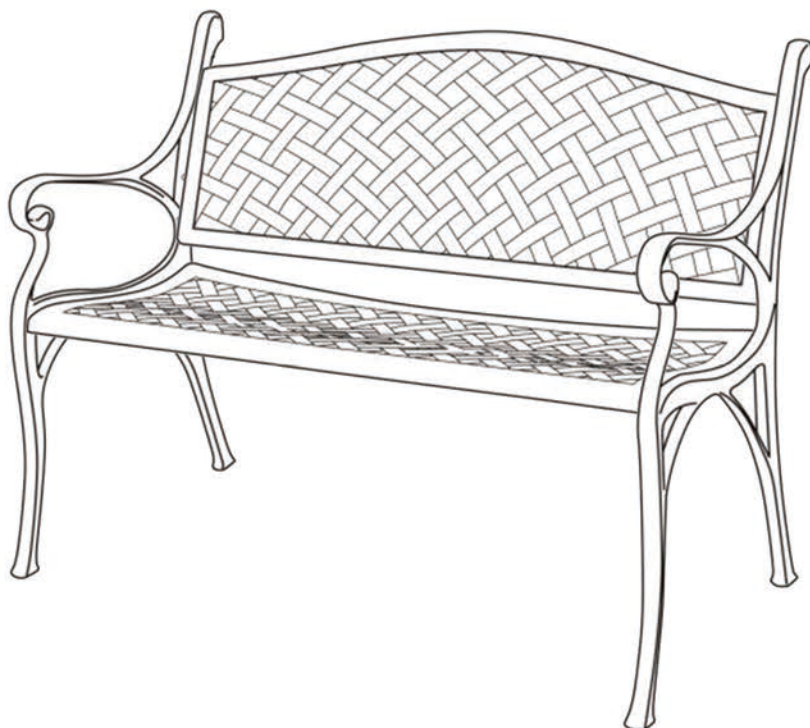

Make sure all screws are tightened before use.

*If you have any questions or complaints, please contact us any time. We are doing the best to provide our customer a better shopping experience and the best service. We promise to solve your issue in 24 hours.*

# Thank you!

*If you like our product or service, it is highly appreciated if you could leave us a feedback and review on Website. As a growing company, your support would be our the greatest motivation. Thank you!*