

Installation Instructions,
Maintenance and Use

Table of Contents

Table of Contents	1
Safety Information	2
Warranty	2
Pre-assembly	3
Pre-assembly (continued)	3
Installation	4
Care and Cleaning	5

1

Safety Information

This instruction manual is for natural granite vanity tops, quartz vanity tops and engineered marble vanity tops. Please read and understand this entire manual before attempting to assemble, operate or install the product.



- Use a professional installer to remove the old vanity top and install the new vanity top.
- Do not use the vanity top until the adhesive fully dries(24 Hours).
- To prevent injury, two people should remove and install the vanity top.
- · The size of the vanity must match the vanity top.
- · Do not stand on vanity.

Warranty

LIMITED LIFETIME WARRANTY

WHAT IS COVERED

Winette products are manufactured with superior quality standards and workmanship and are backed by our limited lifetime warranty. Winette products are warranted to the original consumer purchaser to be free of defects in materials or workmanship. Proof of purchase (original sales receipt) from the original consumer purchaser must be made available for all warranty claims.

WHAT IS NOT COVERED

This warranty excludes incidental/consequential damages and failures due to misuse, abuse or normal wear and tear. This warranty excludes all industrial, commercial & business usage, whose purchasers are hereby extended a one-year limited warranty from the date of purchase, with all other terms of this warranty applying except the duration of warranty. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state and province to province. Contact: Support @ winslyn.com.

Pre-assembly

TOOLS REQUIRED (NOT INCLUDED)



Silicon adhesive




Safety gloves


80808

Level

Pre-assembly (continued)

PACKAGE CONTENTS

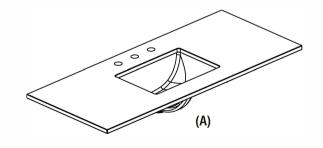




Part No.	Parts	Quantity
Α	Vanity top	1
В	Backsplash	1

^{*} Vanity top with single sink or double sink

Installation

Tools Required for Assembly (not included): Caulking gun, caulk, silicone adhesive, level and putty knife.

- 1. Remove old vanity top. Clean top of vanity to ensure a smooth clean surface .
- 2. Place silicone adhesive on the top edge of the vanity. Ensure new vanity top (A) is clean of any dirt or residue. Carefully align and place vanity top on to the vanity.
- 3. Use a level to ensure the vanity top is level. If not, shims can be used. If gaps occur between vanity and vanity top after leveling, use caulk to seal.
- 4. If installing the backsplash, clean the wall and backsplash (B) of any dirt or residue .
- 5. Apply silicone adhesive to the back and bottom of the backsplash (B).
- 6. Set the backsplash (B) into place by pressing it firmly against the wall and the vanity top so there are no gaps. Then apply silicone adhesive or caulk betweenv wall and backsplash Let the adhesive cure for 24 hours before using the vanity.

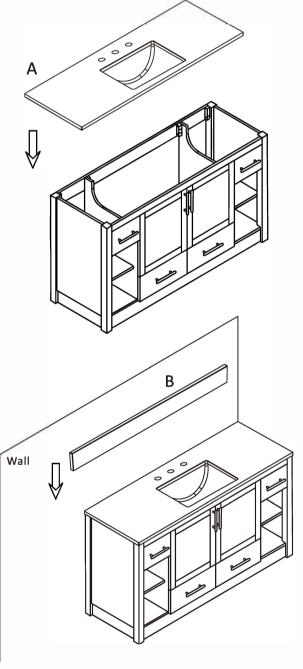

(Bathroom cabinet are not included, need to buy separately)

Care and Cleaning

Engineered Marble Tops

ATTENTION! The engineered marble top surface is very sensitive to acid-alkaline liquids and materials, such as toothpaste, hand soap, cologne, perfume, nail polish remover, hair color and perm products, shampoo, drain and toilet bowl cleaner, alcohol, lemon juice, medications, etc.... Please make sure to avoid these acid-alkaline liquids and materials to reach on the top surface. In case of spill, wipe it off immediately. Always clean the surface and keep it dry after the use.

Quartz

- Do not apply any sealer. Quartz does not need to be sealed.
- Do not use abrasive scrubs. Always use non-scratch pads such as Scotch Bride pad.
- Do not use harsh chemicals, or abrasive oven and plumbing cleaners (Drano, Easy OFF, and Liquid Plumber). These chemicals will dull the surface finish.
- Do not use products containing oils or powders because they leave residue.
- Do not use knives directly on the quartz surface. Always use a cutting board.
- Do not place hot pots, pans, or electric skillet directly on the quartz surface. Always use trivets or hot pads. Extreme heat may cause thermal shock and crack the surface in long term.
- Minimize direct sun exposure to Quartz. Long-term exposure to direct sunlight may discolor surface finish.

5