



The Complete Solution® two-piece elongated toilet, dual-flush

K-45989

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf)
- The Complete Solution toilets provide everything you need, including bowl, tank, seat, wax ring, and hardware
- Cachet® Quiet-Close™ seat closes quietly and quickly unlatches from the toilet for easy removal and convenient cleaning
- Dual-flush technology allows you to choose between a full or partial flush
- Eligible for consumer rebates in some municipalities
- Quiet-Close™ elongated lid and seat prevents slamming
- Quick-Release[™] functionality allows seat to be removed easily from toilet for convenient cleaning
- 2-1/8" (54 mm) fully glazed trapway

Installation

- Supply line sold separately
- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation

Recommended Products/Accessories

K-5588 Purefresh® Deodorizing elongated toilet seat K-5420 Low-Profile Bolt Caps

K-23726 Drain treatment

K-5724 PureWash® M250 Elongated manual bidet toilet seat

Included Components

K-4199 Elongated toilet bowl





Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA

ICC/ANSI A117.1 CSA B651

OBC

IAPMO Certification

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.






Cavata®

The Complete Solution® two-piece elongated toilet, dual-flush

K-45989

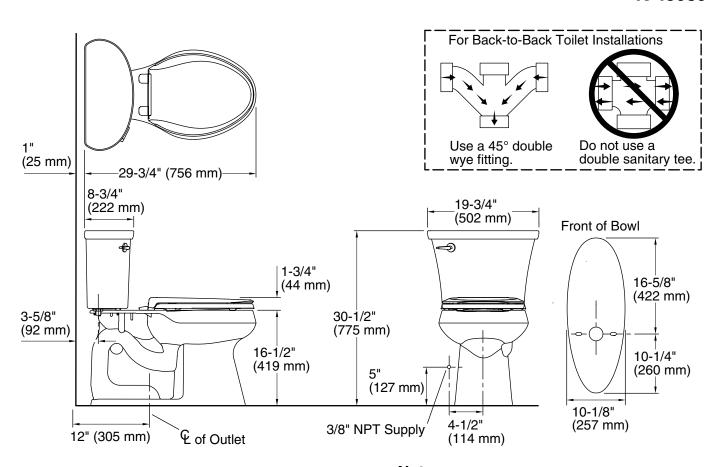

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water 5-3/8" (137 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

