

THE SOLUTION TO  
**RESIDENTIAL PERMEABLE  
PAVER**

Data Sheet



# Gravalock *Slim*

S56



[www.gravalock.com](http://www.gravalock.com)  
[customerservice@gravalock.com](mailto:customerservice@gravalock.com)



**Gravalock®**  
permeable paver



**Gravalock®**  
permeable paver



**Gravalock Slim**

## Applications



- Pathways.
- Front and Backyards.
- Sidewalks.
- Driveways.
- Unpaved roads.



## Dimensions




Load capacity

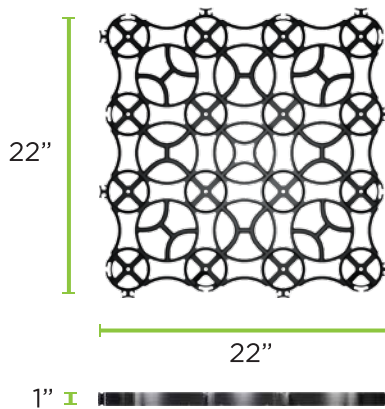

Returns rain  
water to soil



## Installation

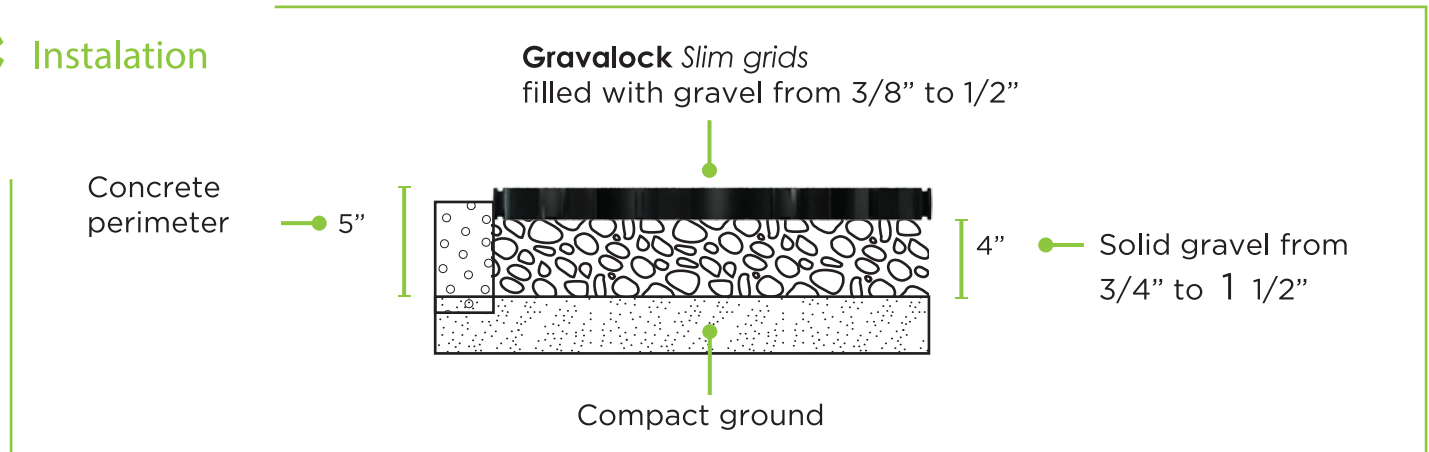

## Technical specifications S56

Grid area	22" x 22" (3.33ft <sup>2</sup> )
Grid heigh	1"
Load capacity	40t / axis
Material	100% Recycled polypropylene
Color	Black with UV protection
Permeable area	80%
Compressive strength	65.5 lb / ft <sup>2</sup> (increases dramatically filled with gravel)
Temperature range	-50 °C a 90 °C
Volume of gravel required by ft <sup>2</sup> of installed grid.	0.14ft <sup>3</sup> aprox.
Chemical resistance	Water, salt, fuel, oils, alcohol, acids, and acid rain.
Environmentally friendly	No toxic, does not damage animals or plants neither contaminates water
Assembly speed	1070ft <sup>2</sup> per man hour