
MOEN

Buy it for looks. Buy it for life.®

Specifications

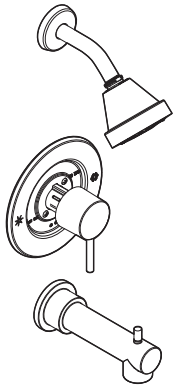

ALIGN™ POSI-TEMP® Single-Handle Tub/Shower Trim Kit

Models: T2191 series - valve trim only
T2192 series - shower trim only
T2193 series - tub/shower trim

Valves: 62300 series
2500 series

FAUCET DESCRIPTION
- Metal construction with various finishes identified by suffix
- Includes showerhead, arm, flange and diverter spout

OPERATION
- Handle operates counterclockwise through a 270˚ arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°


FLOW
- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE
- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS
- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- **ADA** for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

WaterSense Meets EPA Criteria
Certified by IAPMO R&T
GREEN UPC ®
EP Suffix Models Only

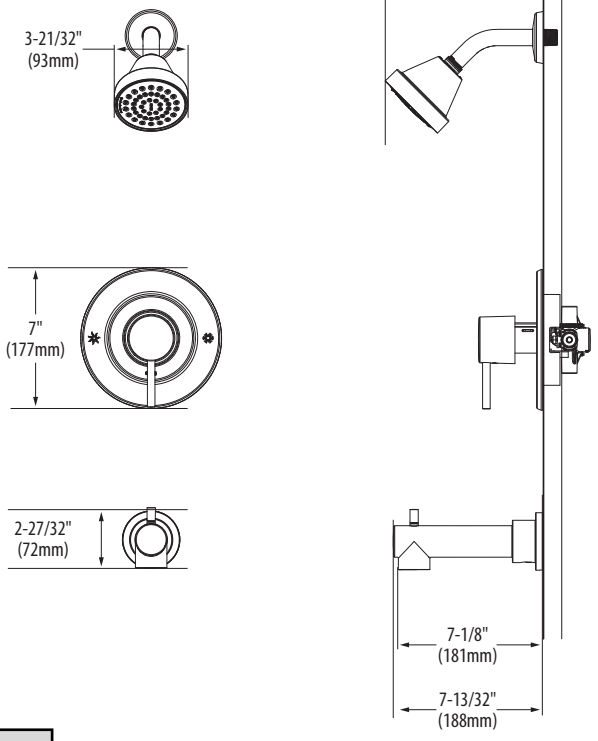

M•pact™ System

CRITICAL DIMENSIONS

(DO NOT SCALE)

Rev. 10/13

FOR MORE INFORMATION CALL: 1-800-289-6636
www.moen.com

Specifications

DESCRIPTION

- Brass construction
- 1/2" CC or IPS connections
- Pressure balancing, four port, cycle valve

OPERATION

- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintain selected discharge temperature to ± 2°F

CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

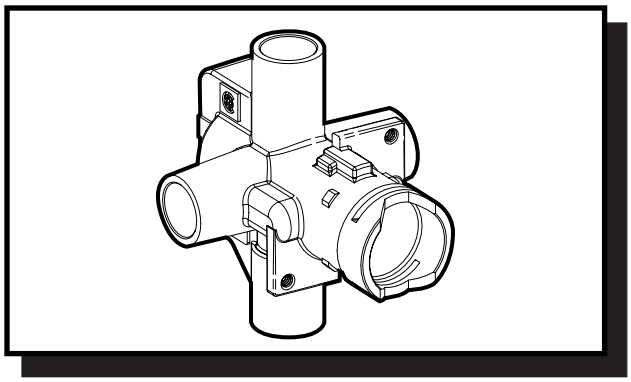


POSI-TEMP® VALVE

Pressure-Balancing Valve

Models: 2520 (CC), 2510 (IPS) - Single Pack
62320 (CC), 62300 (IPS) - Bulk Packed
(Bulk packed 12 per carton)

NOTE: See reverse side for illustrated parts

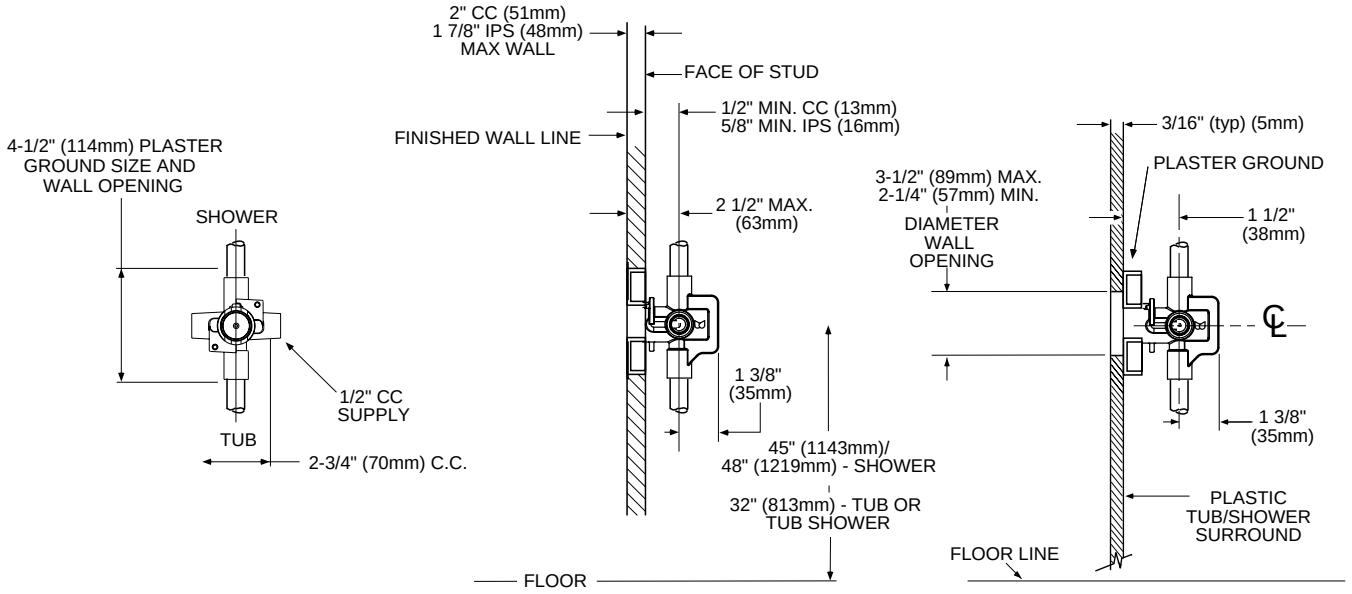

CRITICAL DIMENSIONS

(DO NOT SCALE)