

Features

- For use with Jacquard™, Damask™, Poplin™, Marabou™, and Jute™ vanities.
- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Choice of two installation configurations offers flexibility for spacing.

Material

- Solid wood.



Codes/Standards

















EPA TSCA Title VI
CARB P2

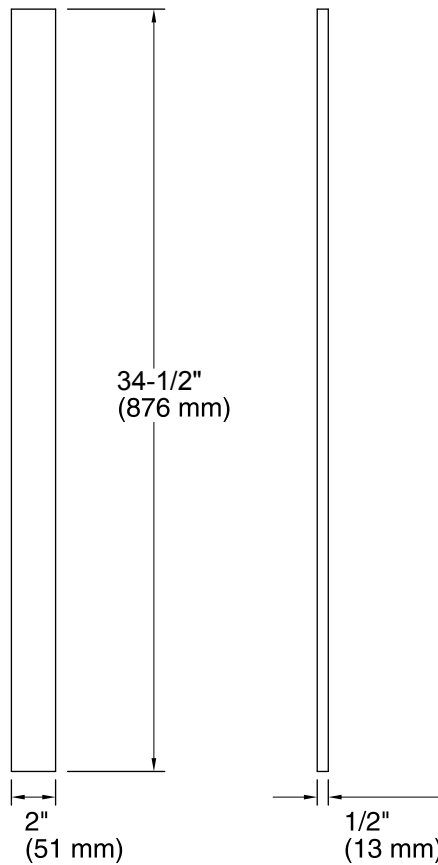
KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	1WA	Linen White
	1WF	Khaki White Oak
	1WN	Corduroy Teak
	1WM	Walnut Flax
	1WD	Ramie Walnut
	1WG	Cherry Tweed
	1WB	Claret Suede
	1WJ	Jersey Oak
	1WH	Woolen Oak
	1WL	Laurentil Silk
	1WK	Satin Oak
	1WC	Felt Grey
	1WP	Ebony Velour
	1WE	Terry Walnut
	1WT	Mohair Grey
	1WU	Batiste Black



Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

Position the filler strip to fill gaps. Scribe and cut to fit.