

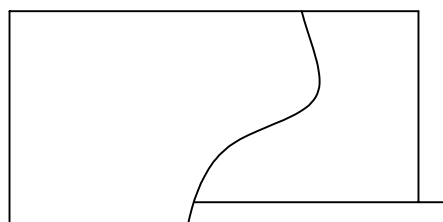


PRP-65 MODEL NUMBER	NOMINAL SIZE	ACTUAL DIMENSION			MEDIA AREA (SQ. FT.)	AIR FLOW CAPACITY (CFM)	INITIAL RES.
		"A"	"B"	"C"			
PRP65*-2406**	12 X 24 X 6	11 3/8"	23 3/8"	5 7/8"	14	600	. 60
PRP65*-0006**	20 X 20 X 6	19 3/8"	19 3/8"	5 7/8"	20	840	. 60
PRP65*-0406**	20 X 24 X 6	19 3/8"	23 3/8"	5 7/8"	23	995	. 60
PRP65*-4406**	24 X 24 X 6	23 3/8"	23 3/8"	5 7/8"	29	1200	. 60
PRP65*-2412**	12 X 24 X 12	11 3/8"	23 3/8"	11 1/2"	28	1000	. 36
PRP65*-0012**	20 X 20 X 12	19 3/8"	19 3/8"	11 1/2"	39	1400	. 36
PRP65*-0412**	20 X 24 X 12	19 3/8"	23 3/8"	11 1/2"	47	1660	. 36
PRP65*-4412**	24 X 24 X 12	23 3/8"	23 3/8"	11 1/2"	58	2000	. 36

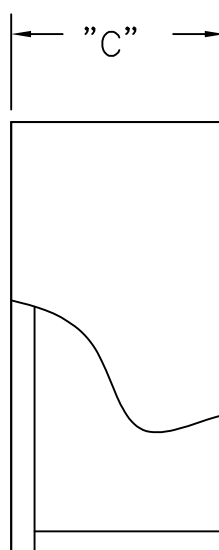

MODEL NO. PRP65 _____ QTY: _____
 MODEL NO. PRP65 _____ QTY: _____
 MODEL NO. PRP65 _____ QTY: _____

PLEAT STABILIZERS
 METAL (CLASS 1) OR PLASTIC (CLASS 2)

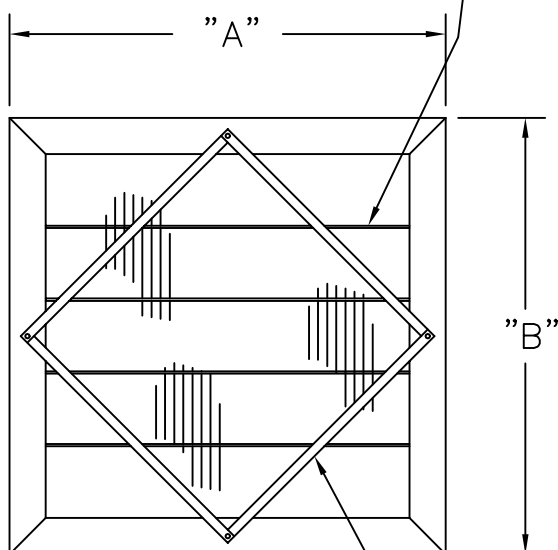

*** MEDIA MATERIAL:**

G=GLASS MICRO-FIBER
 S=SYNTHETIC POLYPROPYLENE

**** OPTIONS:**

1=CLASS 1 (GLASS ONLY)
 =CLASS 2 (NO CODE)
 GU=GASKET UPSTREAM
 GD=GASKET DOWNSTREAM
 GS=GASKET SIDES
 H=HEADER

EXAMPLE OF MODEL NO. : PRP65G-4412GD

24 GA. ALUMINIZED CROSS SUPPORTS

NOTES:

1. MEDIA-MICROFIBER GLASS OR 100% POLYPROPYLENE SYNTHETIC.
2. FILTER TO BE RATED AT 60%-65% EFFICIENT IN ACCORDANCE WITH ASHRAE STANDARD 52.1.
3. FRAME 24 GA. ALUMINIZED METAL
4. PLEAT STABILIZERS - PLASTIC OR METAL CONSTRUCTION.
5. CLASSIFIED AS CLASS 1 GLASS MEDIA ONLY. CLASS 2 IN EITHER GLASS OR SYNTHETIC MEDIA.

CUSTOMER _____

CUSTOMER ORDER NO. _____

FLANDERS ORDER NO. _____

TITLE: FLANDERS RIGID AIR
 60-65%

Flanders
 FLANDERS PRECISIONAIRE

DRAWING NO.
RIGIDAIR60-65%

REV.
