



BARRIER FREE

CADET™ RIGHT HEIGHT 16-1/2"H PRESSURE-ASSISTED EL TOILET

VITREOUS CHINA

CADET™ RIGHT HEIGHT PRESSURE ASSISTED ELONGATED TOILET

 2377.100

- Vitreous china
- Low-consumption (1.6 gpf/6.0 Lpf)
- Bowl rim at 16-1/2"
- Elongated bowl
- Pressure-assisted siphon jet flush action
- Fully-glazed 2" ballpass trapway
- 10" x 12" water surface area
- Close-coupled Flushometer tank*
- Side-mounted chrome trip lever
- Speed Connect™ tank/bowl coupling system
- Sanitary dam on bowl
- Two bolt caps
- 100% factory flush tested



 3109.016 Bowl with two bolt caps

 4098.100 Tank, complete with coupling components


Nominal Dimensions: 31-3/4" x 19-1/2" x 31-1/2"
(806 x 495 x 800mm)

Fixture only, seat and cover supplied by others

Recommended working pressure range
20 psi - 80 psi

Alternate Configurations Available:

- ☐ **3109.456** Elongated bowl only w/slotted rim for bedpan holding
- ☐ **4098.700** Tank and tank cover only w/tank cover locking device
- ☐ **4098.800** Tank and tank cover only w/right hand trip lever
- ☐ **4098.900** Tank complete with right hand trip lever and tank cover locking device

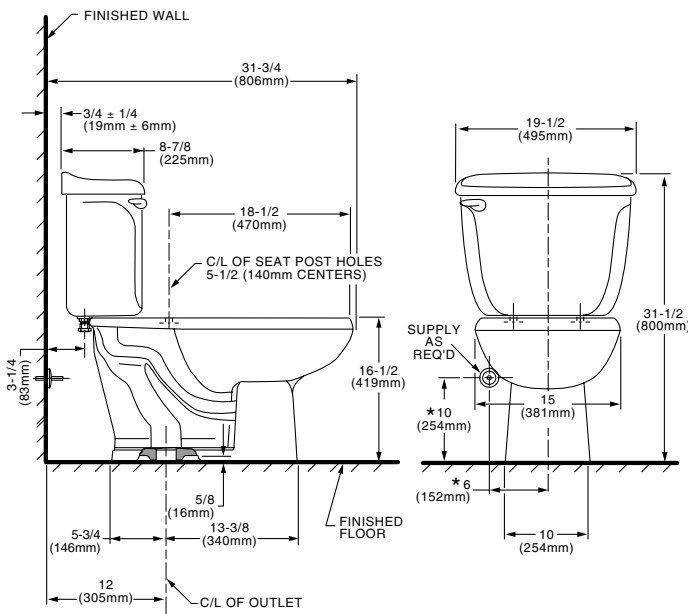

To Be Specified

- ❑ Color:
- ❑ Seat: American Standard #5324.019 "Rise and Shine" (with easy to clean lift-off hinge system) solid plastic closed front seat with cover.
See page TB-001.
- ❑ Seat: American Standard #5311.012 "Laurel" molded closed front seat with cover.
See page TB-001.
- ❑ Alternate Seat:
- ❑ Supply with stop:

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305mm (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



- When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.
- MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.**

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures

* Flushometer tank system by Flushmate® Div. of Sloan Valve Co.