

American Standard



BARRIER FREE

**SPECTRA™
5-1/2' TUB
ENAMELED CAST IRON**

SPECTRA™ 5-1/2' CAST IRON TUB

- ☐ **2696.202** Left hand outlet
- ☐ **2696.102** Right hand outlet

Product Features:

- Enameled cast iron construction
- One-piece bath
- Integral apron
- Comfortable lumbar support
- End drain outlet
- Full slip-resistant pattern

Nominal Dimensions:

66-1/4" x 32" x 16"
(1682 x 813 x 406mm)

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.1 for Cast Iron Plumbing Fixtures
- ASTM F-462 for Slip-resistant Bathing Facilities
- CAN / CSA B45 Series

To Be Specified:

- ☐ Color:
- ☐ Bath Faucet*:
- ☐ Faucet Finish:
- ☐ Drain:

* See faucet section for additional models available

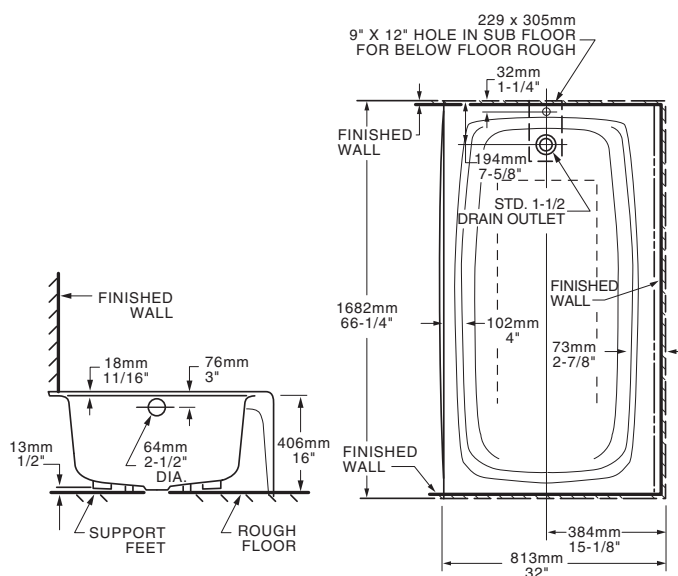

NOTES:

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (2696.102).

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES. INSTALL WITH SEAT AT HEAD END.

GENERAL SPECIFICATIONS FOR 2696 BATHING POOL

INSTALLED SIZE	66-1/4 x 32 x 16 In. (1682 x 813 x 406mm)
WEIGHT	430 Lbs. (195 Kg.)
WEIGHT w/WATER	870 Lbs. (395 Kg.)
GAL. TO OVERFLOW	53 Gal. (200 L)
BATHING WELL AT SUMP	45 x 19-3/8 In. (1143 x 492mm)
BATHING WELL AT RIM	58 x 26 In. (1473 x 660mm)
WATER DEPTH TO OVERFLOW	11 In. (279mm)
FLOOR LOADING	60 Lbs./Sq.Ft. (293 Kgs./Sq.m)
(PROJECTED AREA)	
CUBE (FT ³)	20.5