



184-185 Essence

Elongated Front, SmartHeight™ Vitreous China,
Two-Piece Toilet with SmartClose™ Seat

Features

- Style with a clean and timeless transitional design
- Elongated front, SmartHeight™ (16-1/2" high bowl)
- Chair height for maximum comfort
- Includes SB1700 SmartClose™ toilet seat
- High performance MagnaFlush II™ flushing technology with 3" flush valve virtually eliminates clogging
- Pilot operated anti-siphon fill valve
- 1.6 Gpf / 6.0 Lpf low water consumption
- 2-1/8" glazed trapway
- 12" rough-in
- Complete Essence Suite includes five different sizes bathtub, whirlpool and air systems, self-rimming lavatory, pedestal lavatory with optional towel bar and toilet
- Available in White and Standard Colors: Biscuit and Classic Bone
- Model 85 front-mount, chrome plated metal trip lever
- Meets or exceeds ANSI/ASME A112.192
- Meets or exceeds Canadian Standards Association CSA B45.0
- Outstanding protection — The Mansfield® limited lifetime warranty
- Complies with ADA requirements for accessibility



Elongated Front



Model 184-185
includes SmartClose™ toilet seat

Model No.	Description	Approx. Wt.
184-185	Elongated front, SmartHeight™ (1.6 Gpf/6.0 Lpf) two-piece toilet with SmartClose™ toilet seat. Features large 2-1/8" trapway and 3" flush valve. Includes tank trim and left hand, front mount chrome plated trip lever. Less supply. Specify color.	117 lbs. (53 kg)
184	Elongated front toilet bowl only. 12" rough-in. Specify color.	79 lbs. (36 kg)
185	Tank and cover only, with left hand front mount, chrome plated trip lever. Less supply. Specify color.	38 lbs. (17 kg)
SB1700	Essence SmartClose™ toilet seat. Specify color.	5.5 lbs. (2 kg)



MagnaFlush II™

SmartHeight™



184-185

Essence

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet with SmartClose™ Seat

Features & Upgrades

MagnaFlush II™ Flushing Technology

Featuring an extra large 3" flush valve, a pilot operated fill valve and our optimized 2-1/8" trapway. MagnaFlush II™ flushing technology offers a fast and powerful flush - every time. Performance Without Compromise.



M400 Anti-Siphon Fill Valve

The M400 fill valve operates efficiently at low or high water pressures. Featuring a patented flow regulator and debris filter and positive shut-off for added functionality. Easily adjustable to retain optimum water level.



206 Flush Valve


Our newest 3" flush valve features a high volume flow rate for a quick and quiet flush action. Designed for maximum performance, it offers more than twice the potential flow rate of a conventional 2" flush valve. Non-corrosive and durable, it will provide years of dependable use.



Technical Information

Specifications

Material	Vitreous China
Water Pressure Range	15 to 125 P.S.I.
Flush System	MagnaFlush II™ Flushing Technology
Water Usage	1.6 Gpf / 6.0 Lpf
Water Surface Area	8-1/2" x 11"
Trap Diameter	2-1/8"
Trap Seal	2-1/4"
Rough-in	12"
Shipping Dimensions	Model 184 30-1/2" x 17-7/8" x 18" (775 mm x 454 mm x 457 mm) Model 185 20-1/8" x 9-3/4" x 19-1/8" (511 mm x 248 mm x 486 mm)
Shipping Weight	Model 184 - 87 lbs (40kg) Model 185 - 41 lbs (19 kg)
Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

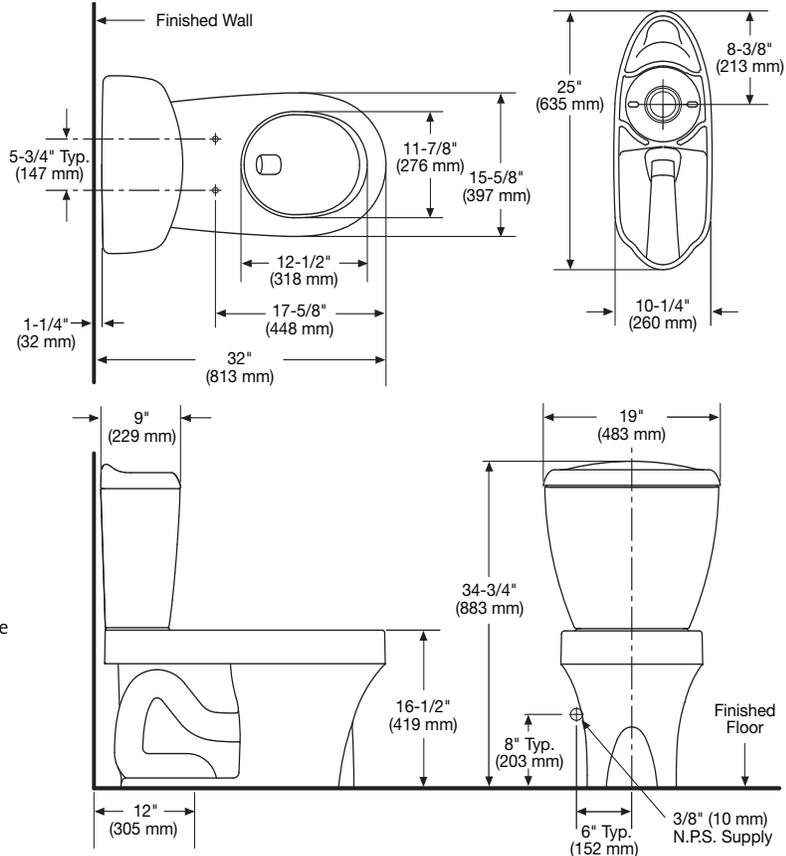

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2 standards and CAN/CSA B45.0 standards, and other state and local codes.

Meets the Americans with Disabilities Act guidelines and ANSI/ASME A117.1 requirements where installed so top of seat is 17" from the finished floor.

NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2

See our complete line of acrylic and vitreous china bathroom and plastic tank trim and plumbing products.

