

# Dual-Fuel Freestanding Range

**E36DF76GPS** professional series



## Smooth-Glide™ Oven Racks

Fully extending oven racks with a centered easy-grip handle make access to oven contents safe and easy. Patented ball bearing rack system allows racks to glide effortlessly.




## Min-2-Max™ Burners

Burner configuration includes two versatile Min-2-Max™ sealed burners delivering anywhere from 18,000 to 450 BTUs. Thanks to the double ring configuration, you can whisk delicate sauces or bring water to a rapid boil. You decide the level of heat output by a simple turn of the knob.



## Six Sealed Burners

Versatile sealed burner configuration provides the utmost in cooking flexibility. Includes: two 18,000-450 BTU Min-2-Max™ burners, two 14,000 BTU Power Burners™, one 9,500 BTU Precision Burner™ and one 5,000 BTU Precision Burner™.



## Third Element European Convection System

By adding a third cooking element and a convection fan, heat is distributed evenly throughout the oven. Cooking every meal to perfection has never been easier.

## 36" DUAL-FUEL FREESTANDING RANGE

### CONTROL PANEL FEATURES

Electronic Oven Control	Yes
Professional-Style Stainless Steel Console	Yes
Large Professional Skirted Knobs with Bezel	8

### RANGETOP FEATURES

Min-2-Max™ Dual-Ring Sealed Burner (BTU)	2 (18,000 – 450)
Sealed Power Burner™ (BTU)	2 (14,000)
Sealed Precision Burner™ (BTU)	1 (9,500) 1 (5,000)
Continuous Grates	3
Electronic Ignition	Yes

### LARGE OVEN CAVITY FEATURES

Capacity	6.4 Cu. Ft.
Bake Element (Watts)	3000
Broil Element (Watts)	4000
Convection Element (Watts)	2500
Cobalt Blue Interior	Yes
Third Element European Convection System	Yes
Self-Clean with Door Lock	Yes
Halogen Oven Light	2
Eight-Pass Bake & Broil	Yes
Smooth-Glide™ Racks	3
Conventional Rack	1
Convection Roasting Rack	1
Hidden Bake Element	Yes

### ADDITIONAL FEATURES

Stainless Steel Backsplash	6"
Full Stainless Steel Side Panels	Yes
Professional Handle	Yes
Fully Adjustable, Heavy-Duty Legs	Yes

### ACCESSORIES

Broil Pan and Insert	Included
Stainless Steel Cleaner	Included
Griddle	Included
Wok Ring	Included
Simmer Plate	Included
9" Stainless Steel Backsplash – 903104-9010	Optional
12" Stainless Steel Backsplash – 903105-9010	Optional
4" Stainless Steel Kick Plate – 318352650	Optional
Stainless Steel Island Trim Kit – 903106-9010	Optional
Black Knobs Kit – 903108-9020	Optional


### SPECIFICATIONS

Oven Cavity Dimensions –	
Height	18-3/4"
Width	30-1/8"
Depth	19-5/8"
Overall Exterior Dimensions –	
Height (Including Adjustable Legs)	41-5/8" – 42-5/8"
Width	35-7/8"
Depth (Including Handle) (with 90° Door Open)	28-3/4" 47-3/8"
Gas Supply Connection Location	Left Bottom Rear
Power Supply Connection Location	Right Bottom Rear
LP Conversion Kit	Included
Voltage Rating	240V/60Hz/30A
Connected Load (kW Rating) @ 240 Volts	5.0
Product Weight	352 Lbs.
Shipping Weight (Approx.)	404 Lbs.
UPC (0-12505-)	09854-8

NOTE: Always consult local and/or national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxusa.com](http://electroluxusa.com).

Specifications subject to change.

## E36DF76GPS professional series

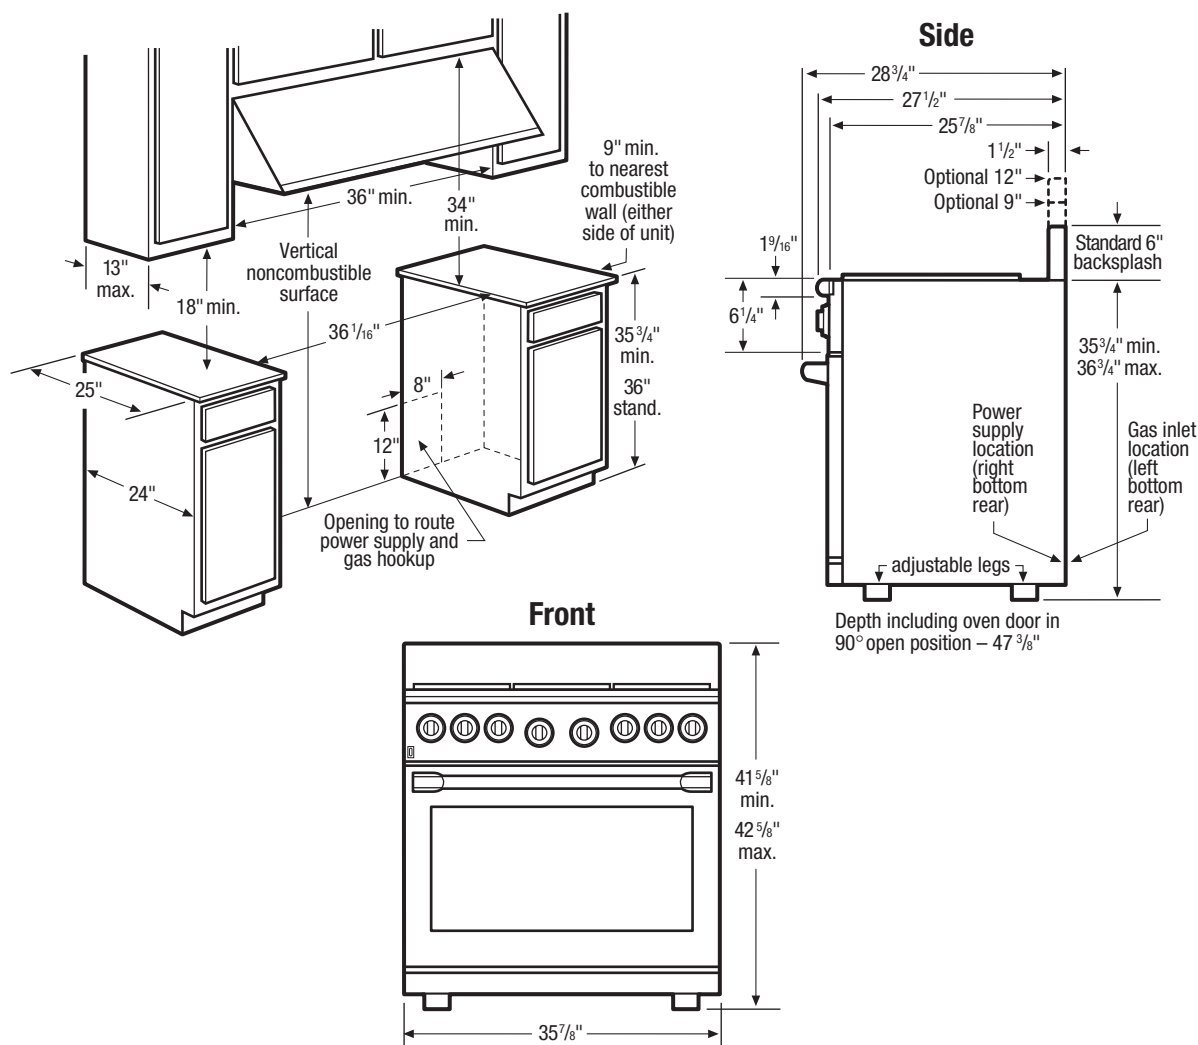

- Product Weight – 352 Lbs.
- Electrical Requirements – 240 Volts, 4-wire, 60 Hertz, 30-Amp Dedicated Circuit
- Connected Load (kW Rating) @ 240 Volts = 5.0kW
- Amps @ 240 Volts = 24 Amps
- Always consult local and/or national electric and gas codes.
- Range ships with 3/4" factory regulator.
- Lp conversion kit supplied.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 34" minimum clearance between top of rangetop and bottom of unprotected wood or metal overhead cabinetry.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 9" minimum clearance from edge of rangetop to nearest combustible wall on either side of unit.

- Allow 28" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No.28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install vent hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

## Optional Accessories

- 9" Stainless Steel Backsplash – (903104-9010).
- 12" Stainless Steel Backsplash – (903105-9010).
- Island Trim Kit (for use in place of backsplash) – (903106-9010).
- 4" Stainless Steel Kick Plate – (318352650).
- Black Knobs Kit – (903108-9020).

