




Signa™ 5 Whirlpool Bath with Integral Skirt

Y345 Signa™ 5 Whirlpool Bath with Integral Skirt
Front Right Motor/Pump

Signa™ 5 Bath with Integral Skirt


Y350 Signa™ 5 Bath with Integral Skirt

- Center Drain Location
- Accessories / Hardware:
 - Trip-Lever Drain Kit: #X559
 - Rotary Drain Kit, 26" Cable: #8730
 - TeraPro Jet Trim Kit: #GU44
 - AccuPro Jet Trim Kit: #GU45
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (826) – Brushed Nickel
 - (849) – Oil Rubbed Bronze

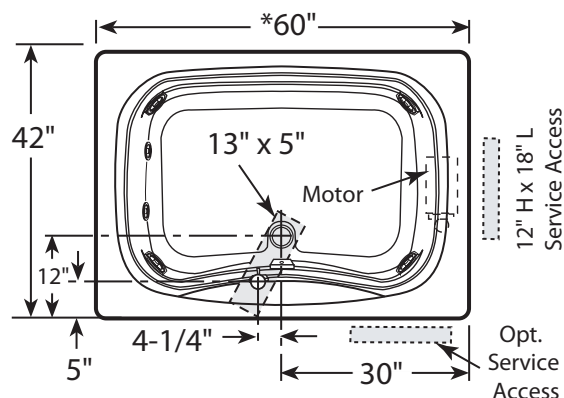


Product Shown: Signa™ 5 Whirlpool Bath with Integral Skirt - Front Right Motor/Pump Model: Y345


* Measurements inside unit represent cutout in floor to allow for drain/overflow.

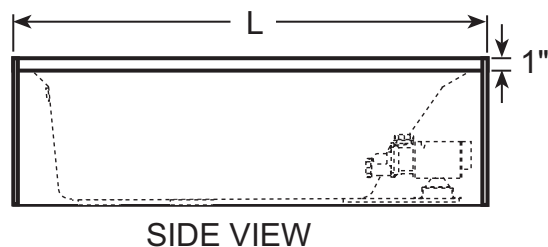

SIDE VIEW

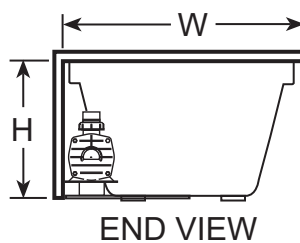

END VIEW



DRAIN/OVERFLOW

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

60" L x 42" W x 22" H
(1524 mm) L x (1067 mm) W x (559 mm) H

DRAIN/OVERFLOW

A: 17-7/8" (451 mm) B: 12-3/4" (330 mm)

CUTOUT

Not Applicable

TOTAL WEIGHT

Y345: 723 lb (328 kg) / 41 lb/sq. ft. (202 kg/m²)
Y350: 682 lb (309 kg) / 38 lb/sq. ft. (186 kg/m²)

OPERATING GALLONAGE

42 U.S. Gal. (159 Liters)
Max. 82 U.S. Gal. (310 Liters)

PRODUCT WEIGHT

Y345: 126 lb (56 kg)
Y350: 82 lb (37 kg)

SKIRT MOUNTING

Integral

ELECTRICAL SPECIFICATIONS MODEL Y345 ONLY

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 15 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

HEATER (OPTIONAL) MODEL Y345 ONLY

Requires a dedicated GFCI protected separate circuit.

RapidHeat™: P/N U395000