

Luxura® 5 pure air® II bath with integral skirt

luxura means, quite literally "luxury"—and what more could you ask? simply, your water never felt this good.



Perfectly stylish in contemporary décors, but wonderfully relevant in more classic settings, the Luxura® bath is both a restorative and retrofit dream.

features:

- Exclusive 360° Balanced Airflow™ system
- 600 watt variable speed heated air blower
- Thermal Lumbar Comfort (TLC)™
- Timed purge cycle
- Safely use salts and aromatic oils
- Pro3™ Ozone Sanitation System standard

Luxura® 5 (with integral skirt) pure air® II bath

model number: EA50 – LH, EA60 – RH

exterior dimensions:

60" long x 32" wide x 20¼" high

interior dimensions:

44½" long x 19" wide

operating gallons:

45 gallons





Luxura® 5 Pure Air II Bath with Integral Skirt

Model: EA50, EA60

Ordering Information

Product Code:

EA50 Luxura® 5 Pure Air II Bath with
Integral Skirt Left Hand

EA60 Luxura® 5 Pure Air II Bath with
Integral Skirt Right Hand

- Right and Left Hand Drain Location
- Accessories / Hardware:
 - Trip-Lever Drain Kit #X559
 - Rotary Drain Kit, 26" Cable #8730
- Trim Kit Finishes Available:
 - (827) - Chrome
 - (898) - Brushed Chrome
 - (815) - Satin Nickel
 - (829) - Bright Brass
 - (805) - Platinum
 - (826) - Brushed Nickel
 - (845) - Oil Rubbed Bronze

Installation Notes

Refer to installation instructions included with fixture before beginning installation.
Please confirm product availability and specifications before commencing with any
installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE
WITHOUT NOTICE.

Technical Specifications

Dimensions

60" L x 32" W x 20-1/4" H
(1524 mm) L x (813 mm) W x (514 mm) H

Drain/Overflow

A: 15-1/4" (387 mm) B: 8-1/4" (210 mm)

Cutout

Not Applicable

Total Weight

707 lb (321.4 kg) / 53 lb/ft² (24 kg/m²)

Operating Gallonage

45 U.S. Gal. (170 liters),
Min. 39 U.S. Gal. (148 Liters)
Max. 50 U.S. Gal. (189 Liters)

Product Weight

117 lb (53 kg)

Skirt Mounting

Integral


Electrical Specifications

Requires a dedicated GFCI protected separate circuit.

Blower: 120 VAC, 15 AMP, 60 Hz.


Heater

No water heater is available on this unit. Blower has integral air heater.

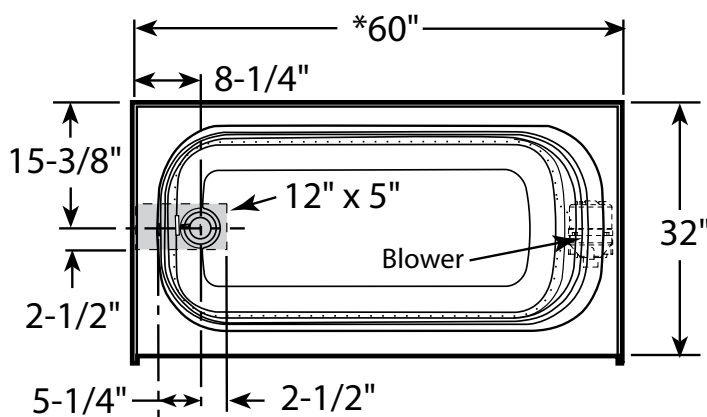


Product Shown: Luxura® 5 Pure Air II Bath with Integral Skirt Left Hand Model: EA50


* Measurements inside unit represent cutout in floor to allow for drain/overflow.

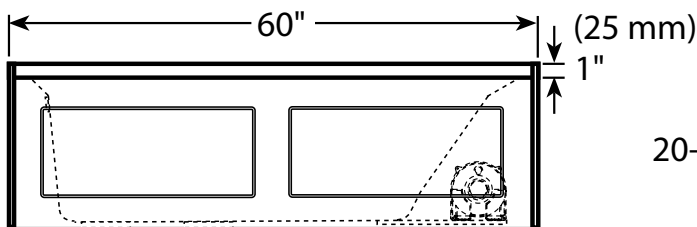

SIDE VIEW

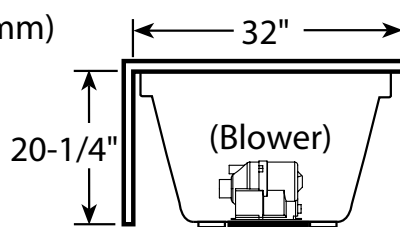

END VIEW



DRAIN/OVERFLOW