



Elara™ 6042

WHIRLPOOL BATH with CHROMATHERAPY

EE80 Elara™ 6042 Whirlpool Bath, Left Hand

EE85 Elara™ 6042 Whirlpool Bath, Right Hand


Elara™ 6042

WHIRLPOOL BATH with ILLUMATHERAPY™

EE90 Elara™ 6042 Whirlpool Bath, Left Hand


EE95 Elara™ 6042 Whirlpool Bath, Right Hand

- Right and Left Hand Drain Location
- Accessories / Hardware:
 - TheraPro™ Jet Rings Kit: #D095
 - AccuPro™ 2 Jet Rings Kit: # P556*
 - Sch 40, Rotoary Drain Kit: #DA34
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (898) – Brushed Chrome
 - (815) – Satin Nickel
 - (829) – Bright Brass
 - (805) – Platinum
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

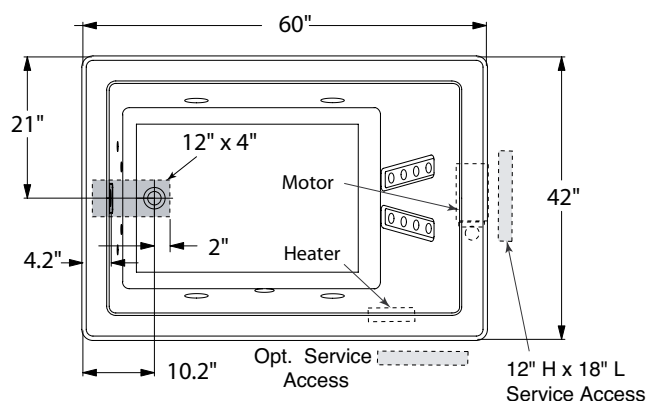


Product Shown: Elara™ 6042 Whirlpool Bath with Illumatherapy™ Left Hand Model: EE90


** Measurements inside unit represent cutout in floor to allow for drain/overflow.*

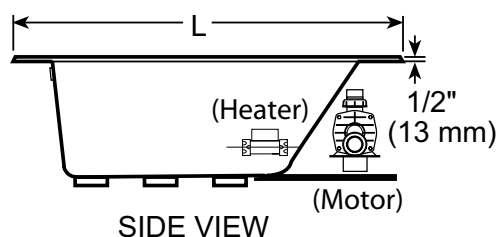

SIDE VIEW



END VIEW



DRAIN/OVERFLOW

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

60" L x 42" W x 23-1/2" H
(1524) mm L x (1067) mm W x (597) mm H

DRAIN/OVERFLOW

A: 18-1/2" (470 mm) B: 10.6" (269 mm)

CUTOUT

58" x 40" & undermount template DQ50000

TOTAL WEIGHT

1126 lb. (511 kg) / 65 lb/ft² (319 kg/m²)

OPERATING GALLONAGE

88 U.S. Gal. (333 Liters)
Min 83 U.S. Gal. (314 liters)
Max 92 U.S. Gal. (348 liters)

PRODUCT WEIGHT

200 lb (91 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 20 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

HEATER (STANDARD)

Requires a dedicated GFCI protected separate circuit.

RapidHeat™: P/N S750000