



Elara™ 7242

WHIRLPOOL BATH with CHROMATHERAPY

EF20 Elara™ 7242 Whirlpool Bath, Left Hand

EF25 Elara™ 7242 Whirlpool Bath, Right Hand


Elara™ 7242

WHIRLPOOL BATH with ILLUMATHERAPY™

EF30 Elara™ 7242 Whirlpool Bath, Left Hand

EF35 Elara™ 7242 Whirlpool Bath, Right Hand


- Right and Left Hand Drain Location
- Accessories / Hardware:
 - TheraPro™ Jet Rings Kit: #D095
 - AccuPro™ 2 Jet Rings Kit: # P556
 - Sch 40, Rotary Drain Kit: #DA34
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (898) – Brushed Chrome
 - (815) – Satin Nickel
 - (829) – Bright Brass
 - (805) – Platinum
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

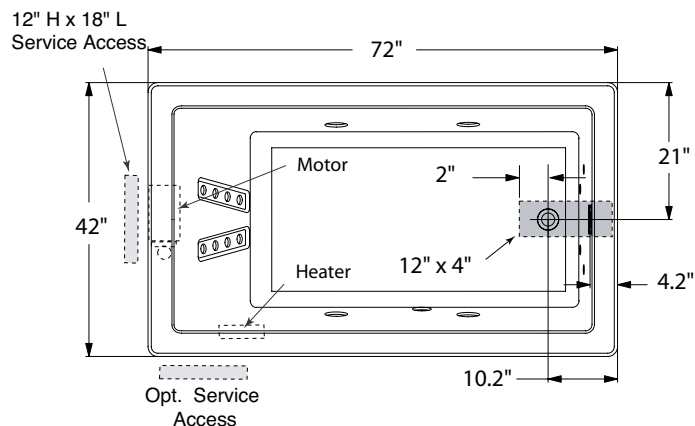


Product Shown: Elara Whirlpool Bath with Illumatherapy Right Hand Shown Model: EF35

* Measurements inside unit represent cutout in floor to allow for drain/overflow.


Minimum Service Access dimensions given.

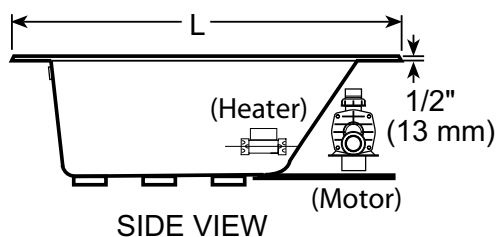

SIDE VIEW



END VIEW



DRAIN/OVERFLOW

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

72" L x 42" W x 23-1/2" H
(1829) mm L x (1067) mm W x (597) mm H

DRAIN/OVERFLOW

A: 18-1/2" (470 mm) B: 10.6" (269 mm)

CUTOUT

70" x 40" & undermount template BZ50000

TOTAL WEIGHT

1345 lb. (610 kg) / 64 lb./ft² (312 kg/m²)

OPERATING GALLONAGE

100 U.S. Gal. (379 Liters)

Min. 95 U.S. Gal. (360 Liters)

Max. 105 U.S. Gal. (397 Liters)

PRODUCT WEIGHT

215 lb. (98 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 20 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

HEATER (STANDARD)

Requires a dedicated GFCI protected separate circuit.

RapidHeat™: P/N S750000