

Thank you for choosing Sprite, the number one brand in shower filtration for the whole family.

Your Hand Held Shower Filter features a replaceable cartridge with patented Chlorgon® non-carbon media that removes more chlorine from shower water – at a wider temperature range – than any other. Model HHC filtration cartridge is rated for three months or 3,000 gallons.

For more information on the family of Sprite filtration products, visit our web site at www.spritewater.com



Hand Held Shower Filter



Use & Care Instructions

At the time of purchase, it is the owner's responsibility to complete proof of purchase of the unit and all replacement cartridge(s) and to demonstrate that proper cartridge replacement and filter maintenance was performed as specified in the owner's instructions. The provisions of this warranty shall not apply to any product that has been subjected to misuse, neglect, over-tightening, lack of, or improper periodic filter replacement, repaired or altered by anyone other than an authorized Sprite Industries service representative, and will VOID the warranty in it's entirety. Transportation charges on units submitted for repair or replacement under warranty to Sprite Industries, Inc. 1827 Capital St., Corona, CA 92880-1727 shall be paid by the registered owner. This is the exclusive remedy and liability for consequential damages. There are no other warranties, either expressed or implied, limited to the extent permitted by law.

Register Sprite Shower Filters on-line at www.spritewater.com or return the warranty registration card with information requested.

LIMITED ONE YEAR WARRANTY

HH FEATURES:

- Hose Mount Shower with Built-in Filter and 3 spray setting
- 72" reinforced hose
- High-Strength hose bracket
- Patented Chlorgon Filtration Media Removes More Chlorine at a Wider Temperature Range
- Replaceable Reversible Filter Cartridge (Model HHC)

REMOVES:

- 75% of Free Chlorine at 3,000 gallons (3 months)1
- Combined Chlorine (Sodium Hypochlorite)2
- Hydrogen Sulfide (odors)3

1. Tested & Certified by NSF International.
2. Tested & Certified by Manufacturer.
3. Tested & Verified by Independent Laboratory.



Sprite Industries, Inc.


1827 Capital Street • Corona, CA 92880
Toll Free: 800-327-9137 • Tel: 951-735-1015 • Fax: 951-735-1016
Web: www.spritewater.com • E-mail: solutions@spritewater.com

Hand Held Filtered Shower

Shower Handle with Built-in Filter

INSTALLATION

1. Remove existing shower head from shower arm.
2. Screw hose-bracket onto shower arm.
3. Remove the paper seal from end of filter handle.
4. Insert (2) rubber washers into couplers at each end of hose.
5. Attache on end of Hose to Bracket and the other to Filter Handle.
6. Place Filter Handle into Bracket.
7. RUN HOT WATER THRU THE FILTER FOR A FULL FIVE MINUTES AFTER INSTALLATION.

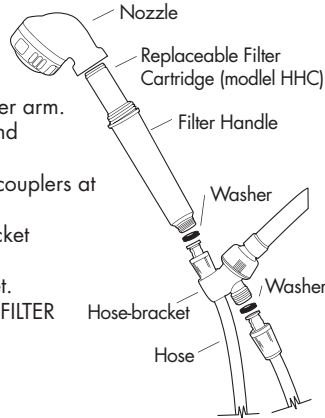

OPERATION

BEFORE ENTERING THE SHOWER.

1. Activate filter by turning the shower-water to "full-hot".
2. Cool to the desired temperature before entering shower.
To ensure over **75% free-chlorine removal**, replace the model HHC Filter Cartridge every 3 months or 3,000 gallons, whichever comes first.

MAINTENANCE

Back-flush monthly or as needed by reversing the direction of the cartridge in the handle.

FILTER CARTRIDGE REPLACEMENT

The filter cartridge should be replaced every 6 months or sooner (depending on individual water conditions).

1. Remove cartridge by unscrewing handle.
2. Remove paper seals from each end and lubricate o-rings with a small amount of Vaseline.
3. Insert cartridge into handle and screw onto showerhead.
4. Flush for five minutes before using.

"REMINDER" DECAL

Is designed to remind you to change the filter cartridge every 3 months.

1. Use a pen to fill out the installation and replacement date.
2. Peel sticker off of backing and apply to a corner of a dry mirror (or any glass surface)



WARRANTY REGISTRATION

Register Sprite Shower Filters on-line at www.spritewater.com or fill out and return the warranty registration card.

Performance Data:

Sprite Shower Filter Model HH

Rated Service Flow – 9.5 liters per minute / 2.5 gallons per minute

Rated Service Life at 75% free chlorine removal – 111,385 liters / 3,000 Gallons

Maximum working pressure – 860 kilo pascals / 125 pounds per square inch

Maximum operating temperature - 49° Celsius / 120° Fahrenheit

Installation – Attaches to shower-arm. No Tools required.

Notes:

- While testing was performed under standard laboratory conditions, actual performance may vary.
- This system is not intended to be used as a drinking water treatment unit.
- Both the system and installation must comply with applicable state and local regulations.



This Sprite Shower Filtration system has been tested and Certified by NSF International against NSF/ANSI Standard 177 for the reduction of free available chlorine. The concentration of free available chlorine in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 177. This system has not been evaluated for free available chlorine reduction performance in the presence of chloramines. Free available chlorine reduction performance may be impacted by the presence of chloramines in the water supply. Please contact your local water utility to determine if chloramines are used in treating your water.

Notes on NFS Test Protocol:

Minimum chlorine reduction per NSF/ANSI 177 shall be listed as $\geq 50\%$ free available chlorine (FAC) when used with an influent challenge water of 2 mg /L FAC.

Average concentrations shall be the arithmetic mean of all reported influent challenge or product water concentrations (the detection limit value shall be used for any nondetectable concentration). The specified average percent reduction shall not be greater than the reduction calculated using the arithmetic means of the influent challenge and the product water concentrations respectively.

