

WM8100H_A

5.2 cu.ft. MEGA Capacity Front Load Washer

5.2 cu.ft. MEGA Capacity TurboWash® Technology 14 Wash Programs TrueBalance™ Plus ENERGY STAR® Most Efficient 2018 Available in White and Graphite Steel

SUMMARY	
Capacity (cu.ft.)	5.2 cu. ft.
Matching Electric Dryer	DLEX8100W
Matching Gas Dryer	DLGX8101W
Color	White (W), Graphite Steel (V)
APPEARANCE	
Hard Buttons	Yes
Touch Buttons	Yes
Dial-A-Cycle™	Yes
ENERGY	
ENERGY STAR [®] Most Efficient 2018	Yes
ENERGY STAR [®] Qualified	Yes
CEE Tier	2
IMEF	2.92
IWF	3.2
WASHER PROGRAMS	
No. of Programs	14
	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Hand Wash / Wool, Bulky / Large, Tub Clean, Bright White, Sanitary, Allergiene [™] , Jumbowash, Small Load
WASHER OPTIONS	
No. of Options	11
	TurboWash®, Steam, Fresh Care, Prewash, Delay Wash, Extra Rinse, ColdWash™, Child Lock*, Rinse+Spin, Drum Light, Add Garments
WASH DETAILS	
No. of Wash/Rinse Temps	5
Wash/Rinse Temps	Extra Hot, Hot, Warm, Cold, Tap Cold
No. of Spin Speeds	5
Spin Speeds	Extra High, High, Medium, Low, No Spin
Max RPM	1300
Water Levels	Load Sensing
No. of Soil Levels	5
FABRIC CARE FEATURES	
TurboWash® 2.0 Technology	Yes
Steam Technology	Yes
Allergiene™ Cycle	Yes
Sanitary Cycle	Yes
ColdWash™ Option	Yes
SenseClean™ System	Yes
CONVENIENCE FEATURES	

SenseClean [™] System	Yes
CONVENIENCE FEATURES	
TrueBalance™ Anti-Vibration System	Yes
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
LoDecibel [™] Quiet Operation	Yes
End of Cycle Signal	Yes
LoadSense	Yes
Child Lock*	Yes
Auto Suds Removal	Yes
Leveling Legs	4 Adjustable Legs
Easy Loading TilTub™	Yes



SMARTTHINQ [®] TECHNOLOGY	
SmartDiagnosis™ (v3.0)	Yes
Laundry Starts	Yes
MOTOR	
Motor Type	Inverter Direct Drive Motor
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	Yes
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door / Rim	Glass/Chrome
Door Cover	Dark Blue Tinted Square Cover
All Available Colors	White (W), Graphite Steel (V)
CERTIFICATION	
AFFA	Yes
NSF	Yes
POWER SOURCE	
Ratings	ULListed
Electrical Requirements	120V, 10 Amps
Туре	Electric
OPTIONS/ACCESSORIES	
Pedestal	WDP5W
Pedestal (WxHxD)	29 x 14 1/8 x 30 7/8 (50 9/16 D with door open)
LG Sidekick™ Pedestal Washer	WD200CW
LG Sidekick™ Pedestal Washer (WxHxD)	29 x 14 1/8 x 30 7/8 (50 9/16 D with door open)
Stacking Kit	KSTK2
Hose Included	Yes
DIMENSIONS	
Product (WxHxD)	29" x 40 3/4" x 32 14/16"
Depth with Door Open	58 11/16"
Carton (WxHxD)	31 21/32" x 44 15/16" x 33 15/16"
Weight (Product/Carton)	225 / 251.5 lbs.
LIMITED WARRANTY	
Parts and Labor	1 Year
Direct Drive Motor	10 Years
Drum	Limited Lifetime
UPC CODES	-
WM8100HWA Washer (White)	048231017459
WM8100HVA Washer (Graphite Steel)	048231017466
DLEX8100W Electric Dryer (White)	048231018043
DLGX8101W Gas Dryer (White)	048231018067
DLEX8100V Electric Dryer (Graphite Steel)	048231018050
DLGX8101V Gas Dryer (Graphite Steel)	048231018074
WDP5V Pedestal (Graphite Steel)	048231012904
WDP5W Pedestal (White)	048231012898
KSTK2 Stacking Kit (Chrome)	048231013017
WD200CV Sidekick™ Pedestal Washer	048231015189
(Graphite Steel)	
WD200CW Sidekick™ Pedestal Washer (White)	048231015196

© 2018 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 9/26/18



WM8100H_A

5.2 cu.ft. MEGA Capacity Front Load Washer

QUICK INSTALL & CLEARANCES


For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

29"
40 3/4"
32 14/16"
58 11/16"
31 21/32" x 44 15/16" x 33 15/16"
Yes
Yes
2
2.92
3.2
UL Listed
120V, 10 Amps
Electric

ELECTRICAL REQUIREMENTS

- The washer should be plugged into a 120-VAC, 60-Hz grounded 3-prong outlet. Plug in the washer. Improper connection of the equipment-grounding conductor can result in risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance. If it does not fit the outlet, have a proper outlet installed by a qualified electrician. Failure to follow these warnings can cause serious injury, fire, electrical shock, or death.
- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current wiring codes and regulations.
- Time-delay fuse or circuit breaker is recommended.
- It is the personal responsibility and obligation of the product owner to have a
 proper outlet installed by a qualified electrician.

DIMENSIONS AND CLEARANCES

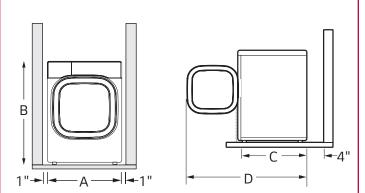


Install the washing machine on a solid floor that is strong and rigid enough to support the
weight of the washing machine, even when fully loaded, without flexing or bouncing. If the
floor has too much flex, you may need to reinforce it to make it more rigid. If the floor is not
solid, it may cause severe vibration and noise.

CONNECTING THE WATER LINES


- LG recommends the use of LG hoses. Any leaking, property damage, or damage to the washing machine caused by an improper installation or by the use of non-LG hoses is not covered under the terms of the LG warranty and is the sole responsibility of the customer and/or an installer.
- Water supply pressure must be between 20 psi and 120 psi (138–827 kPa). If the water supply pressure is more than 120 psi, a pressure reducing valve must be installed.
- Inspect the threaded fitting on each hose and make sure there is a rubber seal in place in both ends of each hose.
- Connect the water supply hoses to the HOT and COLD water faucets tightly by hand and then tighten another 2/3 turn with pliers.
- Always run a gallon or two of water through each inlet hose to flush dirt, scale and other debris out of the water lines. Doing so will help prevent future problems with clogged filter screens, and will also allow you to verify which water line is hot and which is cold.
- Attach the hot water line to the hot water inlet on the back of the washer. Attach the cold water line to the cold water inlet on the back of the washer. Tighten the fittings securely. Turn ON both faucets all the way and check for leaks at both ends of the hoses.

CONNECTING THE DRAIN HOSE

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.
- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
 Normal height of the end of the hose
- Normat height of the end of the hose should be approximately 35"~47" (0.9~1.2 m) from the floor.
- Do not install the end of the drain hose lower than
 29 in. (73.7 cm) or higher than 96 in.
 (243.8 cm) above the bottom of the washer or more than 60 in.
 (152.4 cm) away from the washer.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the tub resulting in poor wash/rinse performance or clothing damage.







LAUNDRY TUB Option

Do not use this drain hose with a floor drain. The end of the drain hose must be at least 29 inches above the floor for proper draining to occur.

© 2018 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 9/26/18