
LOW VOLTAGE MONORAIL QUICK ADAPT PENDANTS • QAP 237

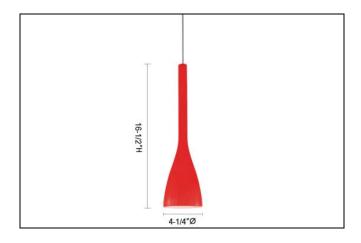

CATALOG INFORMATION						
MODEL	LAMP	MAX WATT	DIMENSIONS	SHADE FINISH	SOCKET FINISH	
QAP 237	JC Bi-Pin	50W	4-1/4"Ø x 16-1/2"H	BK – Black	CH – Chrome	
	12V/24V			RD – Red	SN – Satin Nickel	
				WH – White		

 Ordering Instructions
 MODEL
 SHADE
 /
 SOCKET

 Example:
 QAP 237
 BK
 /
 CH

DESCRIPTION

- Long stem conical glass shade.
- Quick Adapt Pendant includes a Quick Adapt Jack, 8' cable, socket assembly, hang-straight tube, protective lamp shield and Halogen JC Bi–Pin 12V 50W lamp. Cable may be field-cut.
- May be used with Jesco Monorail Systems, Standard Track Systems, or with Monopoint/Multipoint Systems – See COMPATIBLE SYSTEMS.

LAMPING:

Halogen JC Bi-Pin 12V 50W included.

Optional: 24V lamp, requires appropriate power supply (not supplied).

SOCKET:

- For replacement 8' sockets, order QASS23.
- For high ceiling applications that require a longer socket wire, order QASS23-12. 12' socket sets include a Quick Adapt Jack, 12' cable, socket assembly, hang-straight tube and a JC Bi–Pin 12V 50W lamp. Cable may be field-cut.

LISTING:

ETL Listed.

COMPATIBLE SYSTEMS



MONORAIL SYSTEM

The Monorail Fixture Adapter MA-FA (sold separately) provides the connection between the Quick Adapt Pendant to the Monorail.



STANDARD TRACK SYSTEM

The Standard Track Adapter MA-TA-H (sold separately) enables the use of Quick Adapt Pendants in Standard, Line Voltage H-Track Systems. Includes a 50W electronic transformer. Dimmable with an electronic or standard incandescent dimmer.



MONOPOINT / MULTIPOINT SYSTEM

Quick Adapt Pendants may be directly mounted onto Monopoint or Multipoint canopies, which have built-in or remote transformer options.

SUBMITTAL		
Job Name:	Date:	
Specification Type:	Job Location:	
Drawing Location of Fixture Type:	Approval:	
Specifier Name:	Sales Agency Contact:	
Contact Phone/Email:	Contact Phone/Email:	

