

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers

* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

HARDWARE INCLUDED




Cover



Decorative Component
(Hex Nut A, Washer)



Finial




Centre Pillar
(Screws A)




screws (short)




Rubber Rings




screws (Long)




screws (Thick)




Decorative Pillar
(TOP)



Decorative Pillar
(MIDDLE A)



Decorative Pillar
(MIDDLE B)



Decorative Pillar
(BOTTOM)




Big Cap Nuts




Electric Wire



Wire Nuts



A Tripod




Iron Hook



Hex Nuts B

EXPLODED PARTS

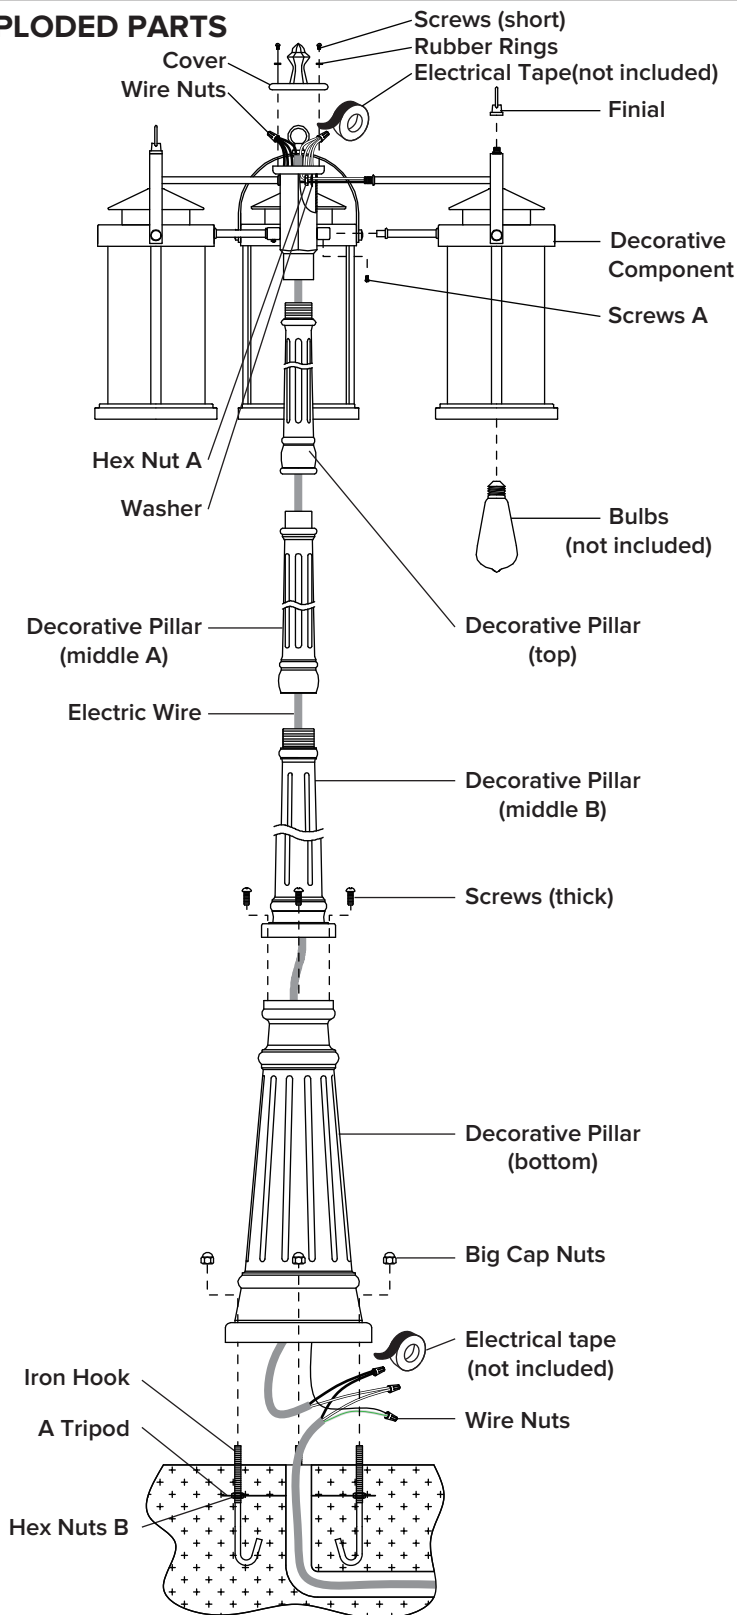


INSTALLATION

STEP 1


Install **iron hook** into the **a tripod** with the **hex nuts B** then embed the component in the ground level with concrete.

Note: the threaded nipple must protrude outward 1 5/8"(41 mm).

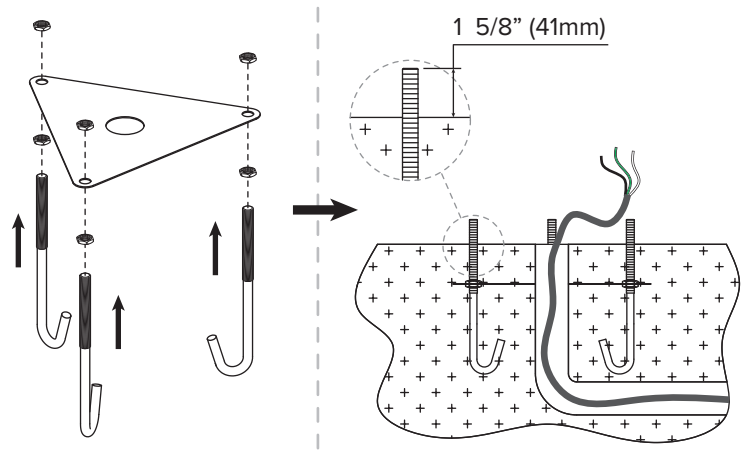



STEP 2

1.Unscrew the **screw A** from the **centre pillar**
1.Successively install the **decorative component** into **centre pillar** and secure them with **washer , hex nuts A and screw A**.

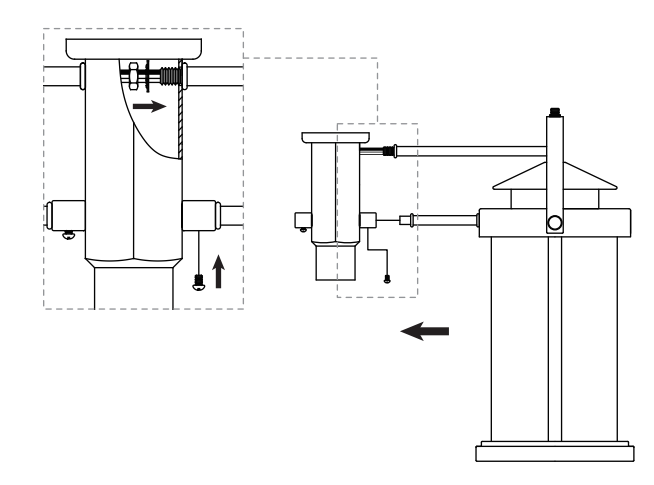


STEP 3

Run the **electric wire** across the **centre pillar**.
Next, connect the black wire, red wire and white wire with the supplied **wire nuts**. Secure with electrical tape(not included). Then carefully tuck wires back into the **centre pillar**.

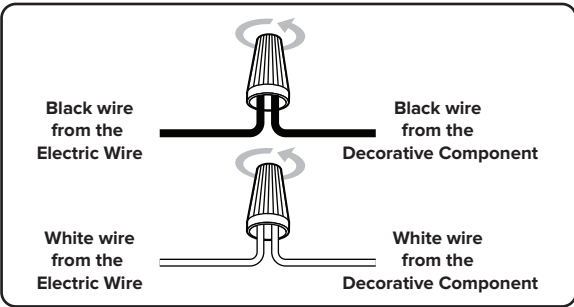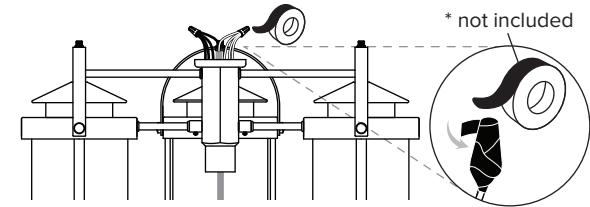


STEP 4

Install the **cover** into **centre pillar** and secure with **rubber rings** and **screws (short)**.

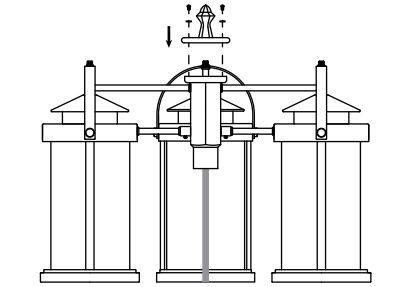


STEP 5

Install **Finial**.

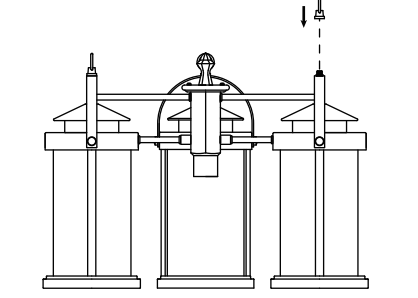


STEP 6

Install bulbs (not included).

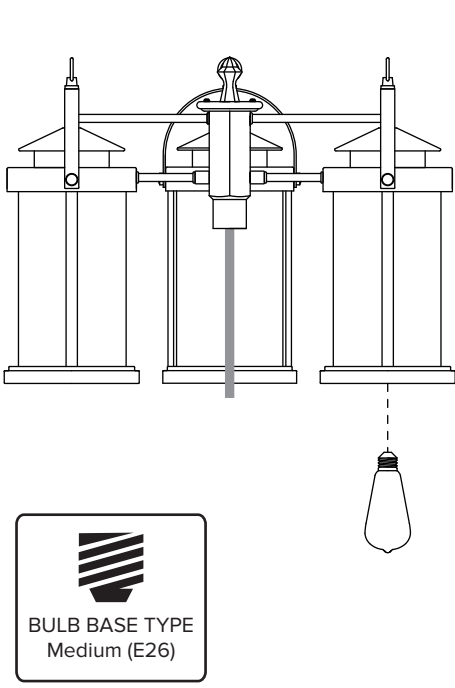


STEP 7

Pass through the **electric wire** into **decorative pillar(top)** and **decorative pillar(middleA & B)**. Secure the **decorative pillar(top)** into **centre pillar**,secure the **decorative pillar(middle A)** into **decorative pillar(top)**,then secure the **decorative pillar(middle B)** into **decorative pillar(middle A)**.

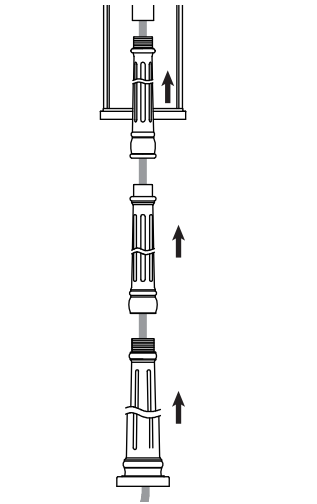


STEP 8

Pass through the **electric wire** into **decorative pillar(bottom)**, attach the **decorative pillar (bottom)** onto **decorative pillar (middle)** using **screws(thick)**.

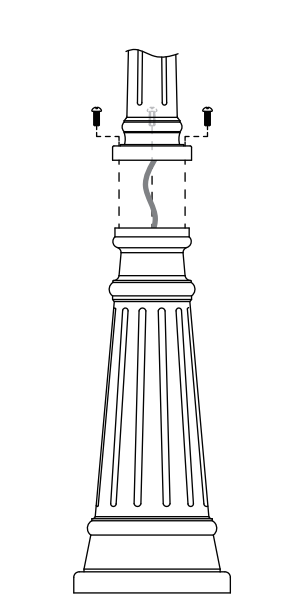

STEP 9

Connect the live wire, neutral wire and ground wire with the supplied **wire nuts**. Secure with electrical tape(not included).

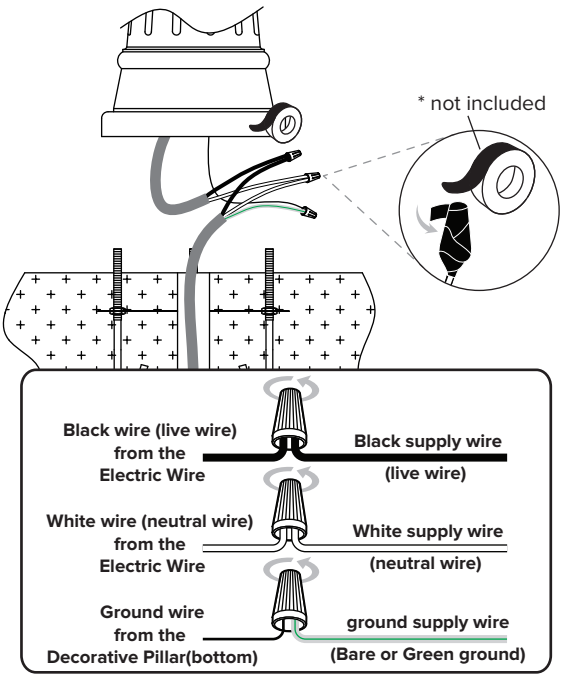

STEP 10

Attach the **decorative pillar to (bottom)** to the **iron hook** through screw holes, and secure it with **big cap nuts**.

