INSTALLATION AND SAFETY INSTRUCTIONS

FOR YOUR SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

GENERAL

You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling, which contains a radiant type heating system. Read instructions carefully.If you are unclear as to how to proceed, consult a qualified electrician.

NOTE: Proper wiring is essential for the safe operation of this fixture.

FIXTURE ASSEMBLY

Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this fixture.

INSTALLATION

Step 1: Pull out the source wires from the post(not included). **Make wire connections with wire connectors(E) as follows:** --Use the wire connector(E) to connect the white fixture wire to the white (neutral) supply wire from the post(not included).


--Use the wire connector(E) to connect the black fixture wire to the black(live) supply wire from the post(not included).

--Connect the ground wire from fixture(C) to the ground wire supply wire.Carefully tuck wires back into the post.

Step 2:Unscrew the fixture screws(D).Attach the fixture(C) onto post using fixture screws(D).

Step 3: Install the bulb(not included.Don't exceed the maximum capacity recommended on the Sockets).

Step 4: Attach the cover(A) onto fixture(C) using screws(B).

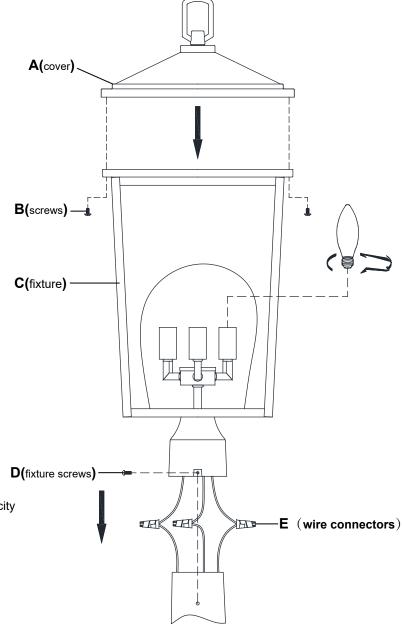

CLEANING

To clean, wipe fixture with a soft and dry cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

Line art shown may not exactly match the fixture enclosed. However, the installations do apply to this fixture.

ITEM NO:2983