




RGBW

100
WATT

BALLOON LIGHT FIXTURE OWNER'S MANUAL

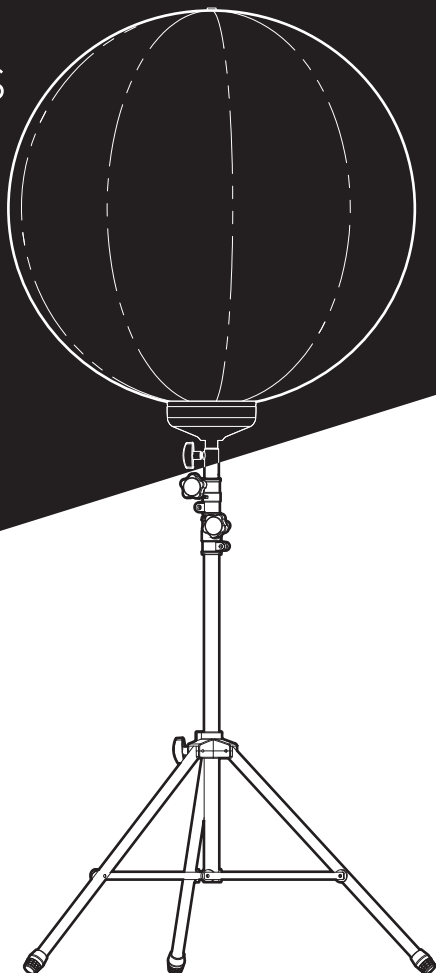

**CALIFORNIA PROPOSITION 65
WARNING**

This product may contain chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm.

For more information: www.P65Warnings.ca.gov

Read this manual carefully before operating this machine. The SeeDevil™ Owner's Manual should stay with the machine if it is sold.

DO NOT THROW AWAY OWNER'S MANUAL.


SeeDevil™ Standard Series Balloon Light
Owner's Manual

© 2023 by Rezek Engineering
1st Edition, November 2023

Any reprinting or unauthorized use without
the written permission of Rezek Engineering
is expressly prohibited.

Printed in U.S.A.



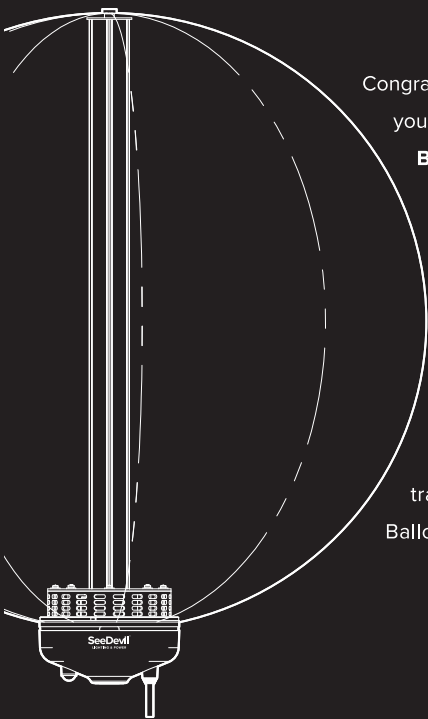



Model: SD-OM100RGB-NOV23-G3



Congratulations on your purchase of
your **100 Watt RGBW SeeDevil™**
Balloon Light.

This manual includes
assembly and product
use information. Please
read the manual
carefully before using to
ensure proper use and
safety while operating and
transporting your SeeDevil™
Balloon Light.

IMPORTANT MANUAL INFORMATION

-  This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death. This symbol is also used to indicate a hazardous situation which, if not avoided, could result in serious injury or death.
-  **WARNING:** USING THIS PRODUCT FOR ANY OTHER PURPOSE OR IN ANY OTHER WAY THAN EXPLAINED IN THE OWNER'S MANUAL COULD LEAD TO DEATH OR SERIOUS INJURY.
-  **WARNING:** KEEP OUT OF REACH OF CHILDREN.
-  **WARNING:** CHILDREN CAN SUFFOCATE BY PLAYING INSIDE UNINFLATED BALLOON LIGHT DIFFUSER. TO AVOID RISK, PLEASE KEEP BALLOON LIGHT DIFFUSER AND ANY BAGS AWAY FROM CHILDREN & BABIES. DO NOT PUT ANY BODY PARTS INSIDE THE DIFFUSER OR CARRY BAGS.
-  **WARNING:** THIS PRODUCT CONTAINS SMALL PARTS THAT COULD CAUSE CHOKING. TO AVOID RISK, PLEASE KEEP AWAY FROM CHILDREN & BABIES.
-  **WARNING:** PLEASE READ AND UNDERSTAND THIS MANUAL COMPLETELY BEFORE OPERATING THE MACHINE.

For additional information, please contact a SeeDevil™ dealer, visit www.SeeDevil.com/pages/contact-us, or call +1 877-659-5476. SeeDevil™ is constantly improving products and reserves the right to make product changes at any time without notice and with no obligation to any products designed or manufactured at any time. This manual contains the most current product information available at the time of printing, there may be minor discrepancies between your product and this manual. If there are any questions or concerns, please contact a SeeDevil™ dealer or visit www.SeeDevil.com/pages/contact-us. This manual should be considered a permanent part of this SeeDevil™ Balloon Light and should remain with this product when resold.

TABLE OF CONTENTS

1. Safety Information	4
1.1 Falling or Tipping Over	4
1.2 Electrical Shock	4
1.3 Carry Bag	5
1.4 Operation in Weather Conditions	5
1.5 Fire/Explosion	5
1.6 High Temperature	5
1.7 Modification to Fixture	5
2. Product Description	6
3. Control Function	8
4. Preparation & Operation	10
4.1 Tripod Preparation & Operation	11
4.2 Balloon Light Fixture Preparation	12
4.2.1 Tripod Adaptor	12
4.2.2 Eye Bold	13
4.2.3 C-Clamp	13
5. Maintenance, Storage & Transport	14
6. Consumer Information	16
7. Warranty Information	18

1. SAFETY INFORMATION

1.1 WARNING: FALLING OR TIPPING OVER

- Set up and place the tripod on a flat level surface. Ensure that all legs of the tripod are completely extended and the screw knob on the bracket connecting the legs to the tripod center at the base is firmly tightened. Do not use on unlevel surface.
- Never transport or move a fully assembled SeeDevil™ Balloon Light. Never move the Balloon Light while mounted on the tripod or while the tripod unit is extended. If the fixture must be moved or transported, first turn power off, unplug, remove the fixture and close the tripod, then move.
- Before operation, make sure the Balloon Light is properly fastened to the tripod. Firmly tighten the two screw knobs on the fixture before use.
- Before extending or retracting the telescoping function on the tripod, be sure that the two knobs are loosened. For retraction, firmly grip and brace the fixture to avoid sudden retraction. Failure to do which may result in damage to the product or serious injury.
- Do not operate this unit in conditions with wind gusts at or over 20 MPH. Doing so may result in injury or death. See page 5: *1.4 Operation in Weather Conditions*.

1.2 WARNING: ELECTRICAL SHOCK

- This SeeDevil™ Balloon Light is rated IP42 for dust and water resistance and can be operated in mildly wet conditions when mounted to the tripod. For more information on use in weather conditions, please contact SeeDevil™ customer support.
- Turn power OFF and unplug before handling the fixture. Failure to do so may result in electrical shock, serious injury or death.
- DO NOT operate when in rain or snow.
- NEVER touch the fixture with wet hands or electrical shock may occur.

- Connect the ground lead of the machine to the ground terminal of the power source.
- Extension cords should be protected by a tough flexible rubber sheath (IEC245) or the equivalent to withstand mechanical stresses.

1.3 WARNING: CARRY BAG

- DO NOT OPERATE BALLOON LIGHT WHILE IN CARRY BAG. ALWAYS OPERATE THE BALLOON LIGHT FREE OF CONSTRAINTS.

1.4 OPERATION IN WEATHER CONDITIONS

- DO NOT OPERATE IN WIND AT OR OVER 20 MPH. IF WIND EXCEEDS 15 MPH, USE STAKES TO ANCHOR THE TRIPOD OR ENOUGH SANDBAGS TO ADEQUATELY ANCHOR TRIPOD TO THE GROUND.
- DO NOT OPERATE IN EXTREME WEATHER CONDITIONS, FOR MORE INFORMATION, CONTACT SeeDevil™ CUSTOMER SERVICE.

1.5 CAUTION: FIRE/EXPLOSION

- Please use in a ventilated area.
- DO NOT USE IN CLOSE PROXIMITY TO COMBUSTIBLE GAS SUBSTANCES.

1.6 CAUTION: HIGH TEMPERATURE

- DO NOT touch the fixture when product is turned on. This may result in burns or other serious injury. Always wait at least 10 minutes to handle after turning power to the fixture OFF, or until the fixture is cool.

1.7 CAUTION: MODIFICATION TO FIXTURE

- DO NOT modify or remove any parts from the fixture. Modifications and removal of parts may lead to serious harm or death. All parts are designed for intended use of this product. Any modification or removal of parts violates all warranties and agreements, and may lead to serious harm or death.

2. PRODUCT DESCRIPTION

Balloon
Light Diffuser

Balloon Light Fixture

Tripod

(Not included, recommended tripod
SeeDevil™ 6.5' Small Tripod Stand)

● ON/OFF

● T-Knob

● Screw Knob

● T-Knob

INCLUDED ACCESSORIES



Remote
Control




Carry Bag



Tripod
Adapter




Eye Bolt



C-Clamp

3. CONTROL FUNCTION

ON/OFF SWITCH:

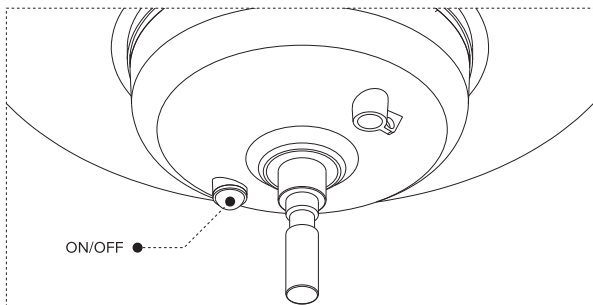

Use the ON/OFF Switch to power the Balloon Light ON and OFF.


Always make sure the Balloon Light Diffuser is correctly mounted and fastened on the fixture when powering ON. Before unplugging the Balloon Light, turn the power switch OFF. DO NOT touch the ON/OFF Switch or fixture while wet, electrical shock may occur. After turning OFF the Balloon Light, please wait at least 10 minutes before handling, the light may be hot which can cause burns or skin discomfort.

REMOTE CONTROL:

This SeeDevil™ remote controls your RGBW light. It allows for Static Mode (single color) and Dynamic Mode (continuous color changing).

Remote Control syncing:

1. Your light comes with one pre-paired remote control. If you replace the remote control or need to control multiple lights with one remote control, follow these steps to pair: plug in the power, quickly press the ON/OFF switch on the remote control three times.
2. To unpair, turn on the light fixture using the ON/OFF switch, then quickly press the ON/OFF switch on the remote control five times.

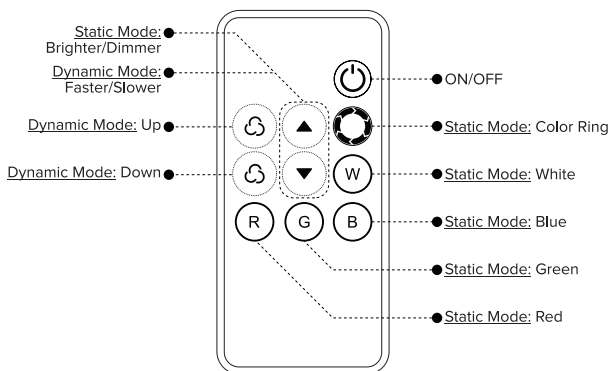


1. Red/Green/Blue/White: Short press to select static color, long press to adjust brightness.
2. Color Ring: Short press to change static color incrementally (24 colors), long press to change gradually.
3. Brighter/Dimmer: For static mode, short press to change brightness incrementally, long press to change gradually.
4. Faster/Slower: For dynamic mode, short press to change speed incrementally, long press for max/min speed.
5. Dynamic Mode Up: Short press for the next dynamic mode, long press to cycle through dynamic modes.
6. Dynamic Mode Down: Short press for the previous dynamic mode, long press for the first dynamic mode.

APP CONTROL:



1. Download SeeDevil™ App and ensure bluetooth is turned ON on your device.
2. Turn the Balloon Light Fixture ON. Once it lights up, it will be ready to pair. Open the APP and go to the device adding interface to add your devices.
3. To unpair your device, press the ON/OFF switch 5 times (ON-OFF-ON-OFF-ON). After the light flashes several times, the previous pairing will be successfully deleted and it will re-enter pairing mode.

4. PREPARATION & OPERATION

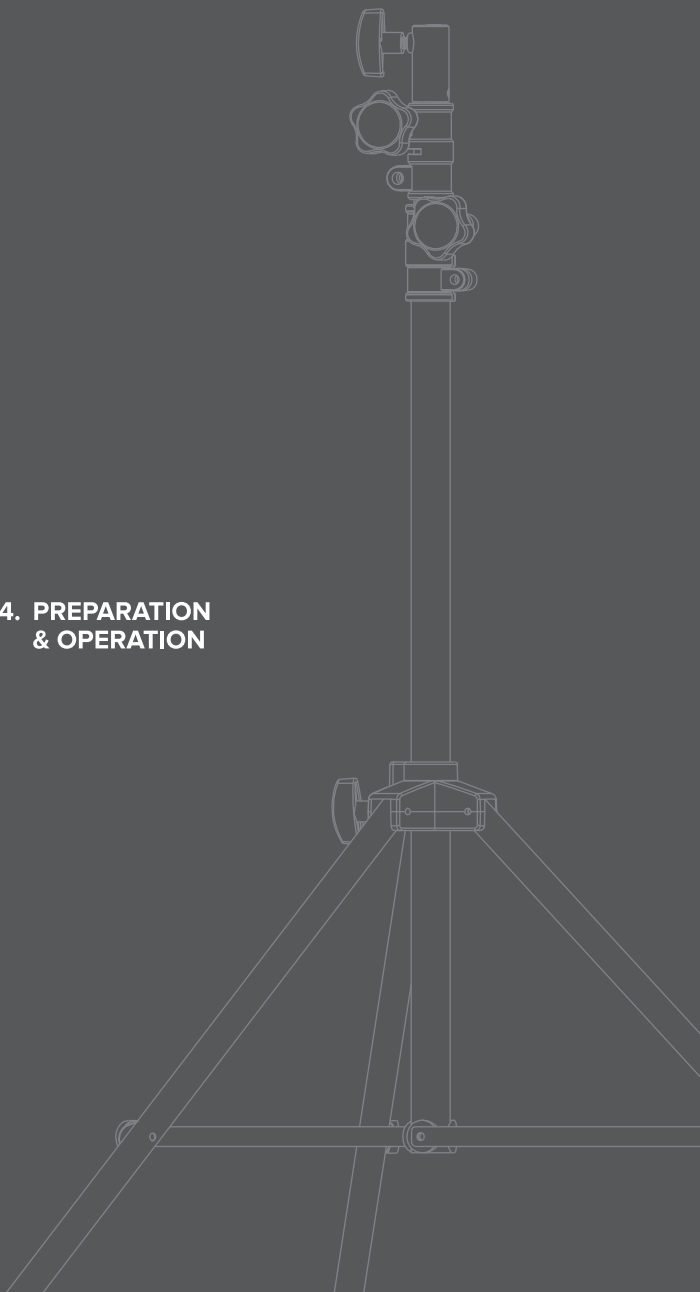


4.1 TRIPOD PREPARATION AND OPERATION **(TRIPOD NOT INCLUDED)**

- Select a level surface to set up the tripod. Allow for a minimum of 3 × 3 feet for the tripod setup location.
- Remove tripod from tripod carry bag.
- Carefully stand the tripod upright, with the three legs pointing down and the Tripod Adapter on the top.
- Loosen the T-knob at the base, then pull the legs apart spreading the 3 legs while sliding the support bracket down until it stops. Make sure legs are fully extended. Tighten the bottom most T-knob securing tripod legs.
- Return to the top of the portion of the tripod. Loosen the two screw knobs. Mount the Balloon Light Fixture on the Tripod Adapter and firmly tighten the T-knob fastening the Balloon Light Fixture to the Tripod Adapter.
- Using your hands, slide one tripod extension pole up and firmly tighten the screw knob. After one extension pole has been extended and secured by the screw knob, follow the same procedure for the second extension pole to reach desired height. **DO NOT** extend further than the red line, surpassing the red line creates an unstable tripod which may result in serious injury or death. **Caution: Pinch point may occur, be careful to not pinch or injure hands. DO NOT operate if you are unsure or unable to operate this equipment. Please consult an expert.**
- To retract the tripod, first firmly grip the extension pole of which you are retracting. Loosen one screw knob, then using your hands slide the extension pole down into the tripod assembly. Repeat once more for the second extension pole if extended. **Caution: Pinch point may occur, be careful to not pinch or injure hands. DO NOT operate if you are unsure or unable to operate this equipment. Please consult an expert.**
- Loosen T-knob on the bottom of the tripod. Close the tripod legs, then tighten of the lower T-knob.
- For tripod transportation: retract completely, close tripod legs, secure all knobs and place in the tripod carry bag.

4.2 BALLOON LIGHT FIXTURE PREPARATION

- Your Balloon Light comes fitted with the Balloon Light Diffuser, so all you have to do to get started is choose your adapter piece, install it and plug the balloon light in.
- Remove SeeDevil™ Balloon Light from packaging, do not use razor knife or any sharp object to remove packaging.
- Select adapter piece to install on SeeDevil™ Balloon Light. (Tripod Adapter, Eye Bolt, C-Clamp). Securely install the adapter piece following the instructions below.
- DO NOT PERFORM ANY INSTALLATIONS, INCLUDING HANGING, SUSPENDING, CLAMPING, OR ANY FORM WITHOUT CONSULTING AN EXPERT OR CONTACTING A SEEDEVIL REPRESENTATIVE AT WWW.SEEDEVIL.COM/PAGES/CONTACT-US.

4.2.1 Tripod Adapter

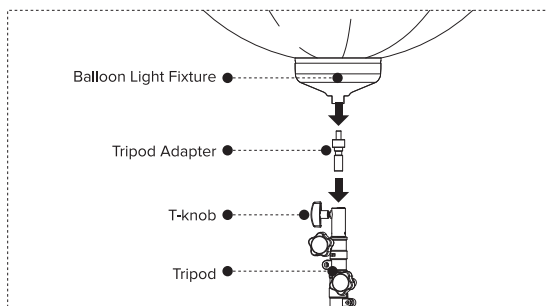


- The Tripod Adapter allows for the SeeDevil™ Balloon Light to be installed on the SeeDevil™ 6.5ft Tripod.
- To install, firmly screw in the Tripod Adapter to the base of the fixture. Loosen the T-knob at the top of the tripod. Slide the fixture into the tripod and securely tighten the T-knob.
- Before installing, make sure to complete each step presented in **4.1 Tripod Preparation**. Failure to properly prepare or setup the tripod could result in serious injury or death.

4.2.2 Eye Bolt

- The Eye Bolt allows for the Balloon Light to be suspended using the Eye Bolt.
- Firmly screw Eye Bolt into screw base at the bottom of the Balloon Light. To ensure firm installation, use a screwdriver to torque the Eye Bolt, turning in a clockwise direction.

Caution: Overcranking may result in serious injury.

4.2.3 C-Clamp

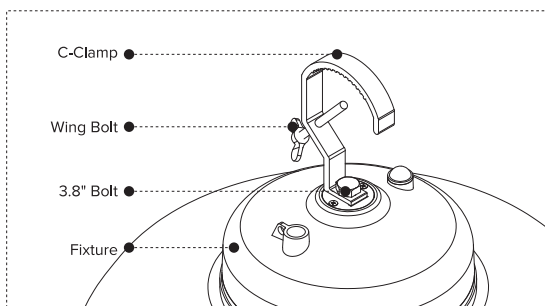

- The C-Clamp is a 2" pipe clamp meant for poles, pipes, scaffolds no larger than 2". When using the SeeDevil™ clamp system, first make sure the pole, pipe or mounting location suitable for the chosen clamp is strong enough to mount or suspend any objects from it. Only mount the clamp system to locations meant for installing, hanging, clamping or mounting heavy objects to them, such as theatre scaffolding.
- Attach the C-Clamp to the fixture with the included 3/8" bolt and firmly tighten it using the included wrench. Firmly mount to pole and secure it using the wing bolt . Do not install on a pipe or pole less than or larger than 2" outside diameter. When mounting the fixture to a pipe or pole, be sure mounting location can support the load of the fixture. Failure to do so may result in injury or death. **DO NOT USE THE CLAMP SYSTEM WITHOUT CONSULTING A PROFESSIONAL OR SeeDevil™ REPRESENTATIVE.**

5. MAINTENANCE, STORAGE & TRANSPORT



MAINTENANCE

- We recommend cleaning the fixture after every use.
- Before performing maintenance, make sure the fixture is turned OFF and unplugged from any power source.
- To clean the Balloon Light Diffuser, first rotate the fixing ring counterclockwise by turning the handle until the diffuser detaches. Then continue rotating the fixing ring counterclockwise until it aligns with the slot. Gently lift the diffuser up to detach it from the fixture.
- To clean the fixture, use compressed air and gently blow out the interior and exterior of the fixture.
- To reinstall the diffuser, place it over the fixture, align the fixing ring with the groove and push it down into the fixture. Rotate the fixing ring clockwise until it is tightly secured to the fixture.
- To maintain the tripod, simply wipe down with a cloth and warm water. A light soap solution may be used. Make sure to dry the fixture after cleaning.

STORAGE & TRANSPORT

- After operation, remove Balloon Light Diffuser, fold and store in protected area.
- Always store the fixture and tripod in their carry bags to ensure additional protection during transport and storage.
- Store the Balloon Light in a clean and dry place.
- If the products are exposed to the elements, always clean and dry the products entirely before storage or transport.

6. CONSUMER INFORMATION



CONSUMER INFORMATION

The Model and Serial Number can be found on the specifications sticker located on the side of the Balloon Light Fixture. These are your products identification numbers. Please keep record of these numbers as well as the purchase date.

Keep these ID numbers in a separate place in case your product is stolen.

Use the Model and Serial Number when ordering parts from a SeeDevil™ dealer or registering your warranty.

7. WARRANTY INFORMATION





WARRANTY INFORMATION

PRODUCT:	SeeDevil™ Balloon Light
MODEL NUMBER:	
SERIAL NUMBER:	

For detailed warranty information, please see pages 20–21 of this manual.

Please hold onto your SeeDevil™ Balloon Light purchase invoice in order to claim your lifetime warranty free from defects.

For general inquiries, please visit:
www.SeeDevil.com/pages/contact-us

Or call:
+1 877-659-5476



BALLOON LIGHT SERIES PRODUCT LIFETIME LIMITED WARRANTY

SeeDevil™ hereby warrants that new SeeDevil™ balloon light fixtures purchased from authorized SeeDevil™ balloon light dealers in the United States will be free from defects in material and workmanship for the period of the time stated herein, subject to certain stated limitations.

In order to claim warranty products must be registered via www.SeeDevil.com. SeeDevil™ voids its obligations to warranty on any and all products that are not registered within 90 days of purchase. Please keep purchase order/invoice for registration purposes, failure to do so may result in the inability to register SeeDevil™ products. For warranty assistance please call +1 877-659-5476 or email Info@SeeDevil.com.

THE PERIOD OF WARRANTY: any new SeeDevil™ balloon light fixtures purchased from an authorized SeeDevil™ balloon light dealer or SeeDevil™ in the United States will be warranted against defects in material and workmanship for a period of six (6) years from the date of purchase for pleasure or non-commercial use/applications, subject to exclusions noted herein. SeeDevil™ balloon light fixtures are rated for a 50,000 hr. lifetime, therefore a six (6) year limited warranty exceeds the product rated lifetime of a SeeDevil™ balloon light fixture. SeeDevil™ balloon light fixtures purchased for commercial or rental use/applications from an authorized SeeDevil™ balloon light dealer or SeeDevil™ in the United States will be warranted against defects in materials or workmanship for a period of two (2) years from date of purchase subject to exclusions noted herein.

DURING THE PERIOD OF WARRANTY: any authorized SeeDevil™ balloon light dealer will, free of charge, repair or replace, at SeeDevil's option, any part judged defective by SeeDevil™ due to faulty workmanship or material from the factory. Parts used in warranty repairs will be warranted for the balance of the product's warranty period. Failures other than those resulting from defects in material workmanship which arise solely as a result of owner abuse, use and/or lack of proper maintenance are not covered by this warranty. All parts replaced under warranty become the property of SeeDevil™.

GENERAL EXCLUSIONS from this warranty shall include any failures caused by:

- Installation of parts or accessories that are not qualitatively equivalent to genuine SeeDevil™ parts.
- Abnormal strain, neglect, or abuse.
- Wear and tear – wearing down of parts due to product use.
- Lack of proper maintenance.
- Accident or collision damage or any act of God.
- Product modification.

SPECIFIC EXCLUSIONS

Shall include parts replaced due to normal wear or routine maintenance.
Excluded from this warranty are any incidental or consequential damages including loss of use.

THE CUSTOMER'S RESPONSIBILITY under this warranty shall be to:

Operate and maintain the balloon light as specified in the appropriate Owner's Manual.
Give notice to an authorized SeeDevil™ balloon light dealer of any and all apparent defects within ten (10) days after discovery, and make the machine available at the time for inspection and repairs at such dealer's place of business. You may locate your nearest authorized SeeDevil™ balloon light dealer online at www.SeeDevil.com.

Six (6) years of private, non-commercial use.
One (1) year for commercial or rental use/applications.

Questions concerning this warranty? Contact SeeDevil™ at:

SeeDevil™
970 Reece St.
San Bernardino, CA, 92411
+1 877-659-5476
info@SeeDevil.com

WARRANTY TRANSFER: to transfer any remaining warranty from the original purchaser to any subsequent purchaser, it is imperative that the unit be inspected and registered for warranty by an authorized SeeDevil™ balloon light dealer. In order for this warranty to remain in effect, this inspection and registration must take place within 10 days after transfer. A reasonable dealer imposed fee may be charged for the inspection.

SeeDevil™ makes no other warranty of any kind, express or implied. Implied warranties of merchantability and fitness for a particular purpose which exceed the obligations and time limits stated in the warranty are hereby disclaimed by SeeDevil™ and excluded from this warranty.

*Exclusions may apply

Product Category	Warranty
LED Balloon Light Fixtures	Life-time
Rechargeable LED Area Light	2 Years
Rechargeable LED Work Light	2 Years
Portable Power Stations	2 Years
Solar Panels	2 Years
Solar Overlander	2 Years



For more information, visit
SeeDevil.com



info@SeeDevil.com



TOLL FREE NUMBER
+1 877-659-5476

SeeDevil™ Standard Series Balloon Light
Owner's Manual

© 2023 by Rezek Engineering
1st Edition, November 2023

Any reprinting or unauthorized use without
the written permission of Rezek Engineering
is expressly prohibited.

Printed in U.S.A.

Model: SD-OM100RGB-NOV23-G3