

SAFETY INFORMATION

Released Date: 2021-06-19

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

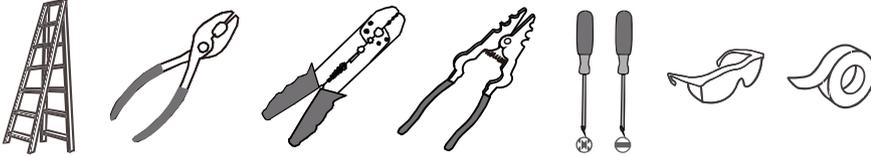


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am – 5:00pm EST), or visit us on-line at www.quoizel.com.


PACKAGE CONTENTS



A Fixture Loop
x 1

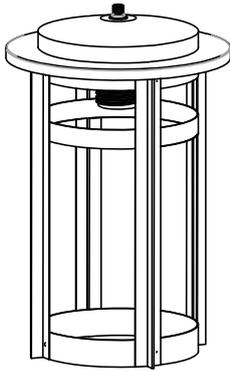

B Fixture Body
x 1




C Glass Shade
x 1




D Socket Collar
[pre-assembled to Fixtrure Body]
x 1

MOUNTING HARDWARE




AA Crossbar Assembly
x 1



BB Wire Connector
x 3



CC Outlet Box Screw
x 2



DD Ceiling Canopy
x 1




EE Quick Link
x 2



FF Fixture Chain
x 1


INSTALLATION

1 Install Fixture Loop

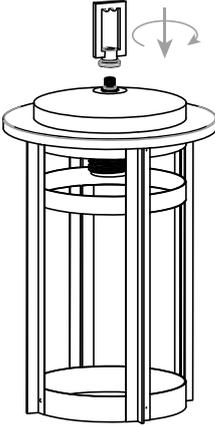

A diagram showing a cylindrical fixture housing with a loop being attached to its top. A curved arrow indicates the rotation of the loop.

2 Install Crossbar Assembly

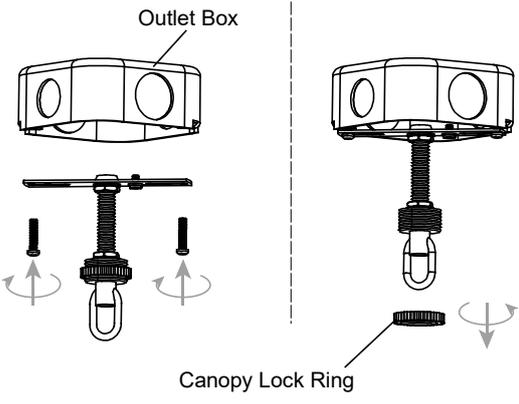


Outlet Box

Canopy Lock Ring

A diagram showing the crossbar assembly being attached to the fixture housing and the canopy lock ring. A curved arrow indicates the rotation of the assembly.

3 Install Fixture Chain

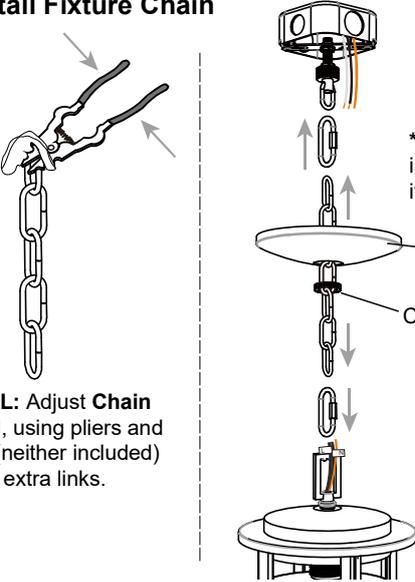

* Ceiling Canopy shape is varies depends on items purchased.


Ceiling Canopy

Canopy Lock Ring

OPTIONAL: Adjust Chain as desired, using pliers and soft cloth (neither included) to remove extra links.

A diagram showing the fixture chain being attached to the ceiling canopy and the canopy lock ring. A curved arrow indicates the rotation of the chain.


4 Pull Supply Wires

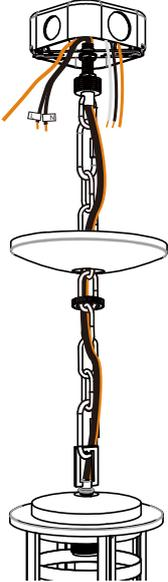

Pull the supply wires with ground wire through the chain alternate links.

A diagram showing the supply wires being pulled through the chain alternate links.

5 Wiring

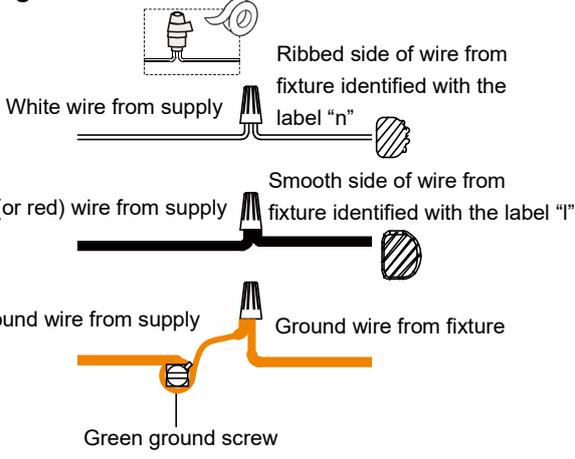

Ribbed side of wire from fixture identified with the label "n"

White wire from supply

Smooth side of wire from fixture identified with the label "l"

Black (or red) wire from supply


Ground wire from supply

Ground wire from fixture

Green ground screw

A diagram showing the wiring connections for the fixture, including the white, black (or red), and ground wires.

6 Install Ceiling Canopy




* Ceiling Canopy shape is varies depends on items purchased.

A diagram showing the ceiling canopy being attached to the fixture housing. A curved arrow indicates the rotation of the canopy.

INSTALLATION


7 Install Glass Shade

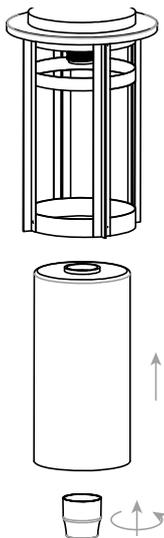

8 Install Bulb

Install the correct bulb referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):



Your installation is now complete! Restore electricity and save this sheet for future reference.