

ASSEMBLY INSTRUCTIONS

3 Drawer Chest

MOD-7239 / V0.07.04.25

modway



Questions? Contact us!

609.256.9000

cs@modway.com

Welcome.

Let's get started.

Before you begin, here are some things to keep in mind:

Assembly will take most people **about 60 minutes**. Consider having a friend help you!

Only use hand tools to assemble this item.

Do not use power tools. Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.

Read through all of the instructions before starting. Make sure you have all parts and components before discarding any packing materials.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.






















Care instructions are listed in the last step of this manual.

WAIT!

Missing parts or hardware? Need assistance?
Contact us before returning your item.
We're here to help!



HARDWARE INCLUDED IN THE BOX:

A		Cam Lock Ø15mm	x38
B		Cam Bolt Ø7.5 x 32mm	x47
C		Cam Sticker (Oak)	x22
D		Plastic Dowel M6 x 30mm	x75
E		Screw 10 x 33.5mm	x19
F		Cam Lock Ø12mm	x9
G		Screw 6 x 8mm	x12
H		Screw 6 x 13mm	x12
I		Drawer Rail	x3
J		Cam Sticker (White)	x22
K		Sticker Foam	x4
L		Screw 4 x 10mm	x4
M		Screw 6 x 25mm	x3
N		Screw 4 x 19mm	x12
O		Washer	x3
P		Screw 4 x 25mm	x6
Q		Handle	x6
R		Screw 10 x 25mm	x4
S		Backply Stopper	x12
T		Washer Plate	x3
U		Wall Bracket Set	x1

WHAT YOU NEED:



Phillips



Long Phillips Head Screwdriver




Phillips



Short Phillips Head Screwdriver

FURNITURE COMPONENTS INCLUDED IN THE BOX:


All parts are numbered with a sticker according to this list.

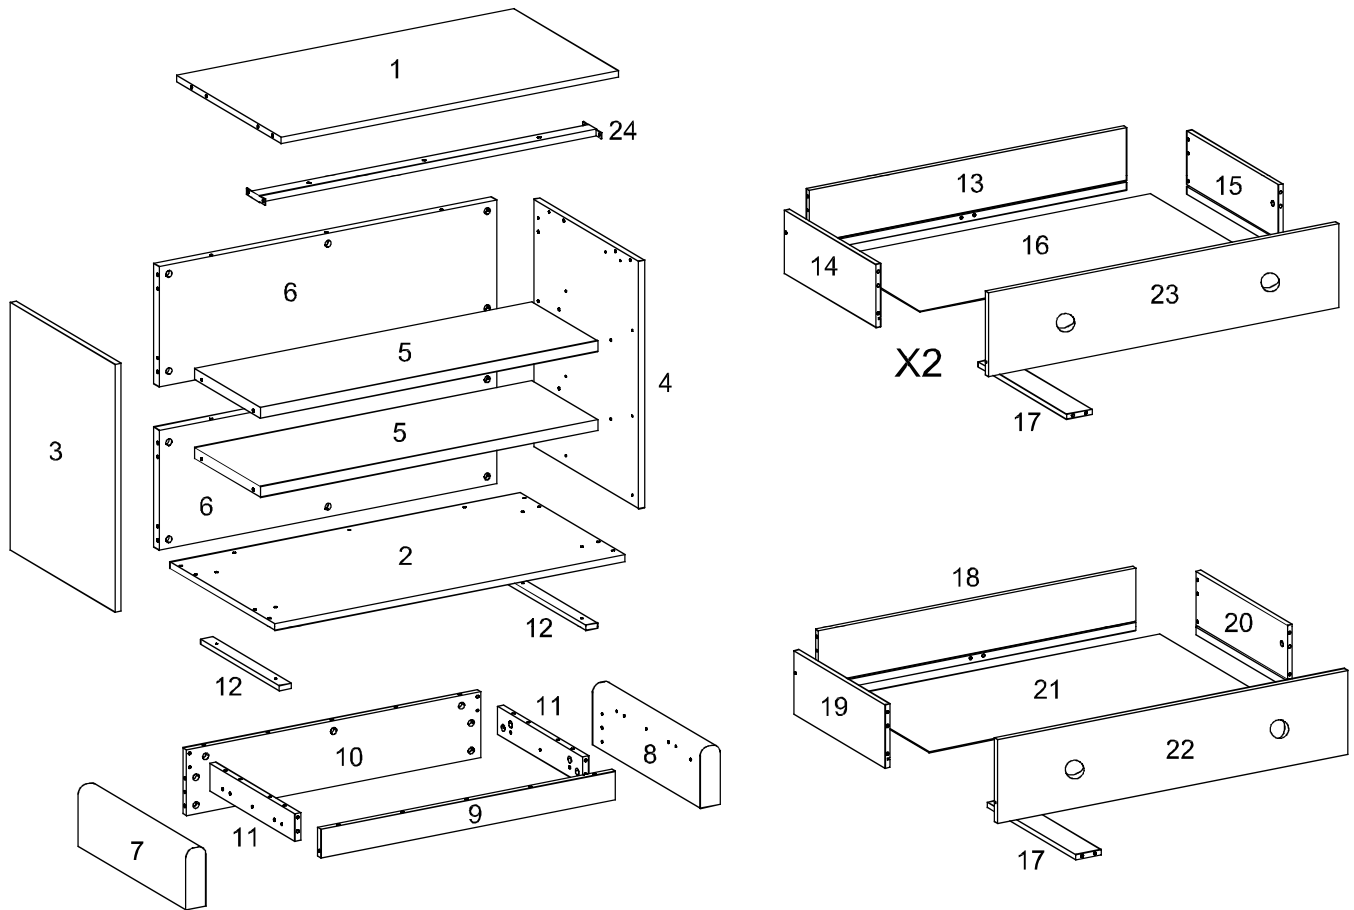

1	Top Board	x1	11	Side Support	x2	21	Lower Bottom Drawer	x1
2	Bottom board	x1	12	Bottom Support	x2	22	Bottom Front Drawer	x1
3	Left Board	x1	13	Top Rear Drawer	x2	23	Top Front Drawer	x2
4	Right Board	x1	14	Top Left Drawer	x2	24	Metal Support	x1
5	Adjustable Shelf	x2	15	Top Right Drawer	x2			
6	Rear Board	x2	16	Upper Bottom Drawer	x2			
7	Left Leg	x1	17	Bottom Support Drawer	x3			
8	Right Leg	x1	18	Bottom Rear Drawer	x1			
9	Front Support	x1	19	Bottom Left Drawer	x1			
10	Rear Support	x1	20	Bottom Right Drawer	x1			

1.1 Attach Metal Support (24) to Top Board (1) using screw (M), washer (O) and Washer Plate (T). Tighten the screw (M) about 50% before fixed.

1.2 Insert and screw Cam Bolt (B) into Top Board (1) as shown. Insert Plastic Dowel (D) into Top Board (1) as shown.

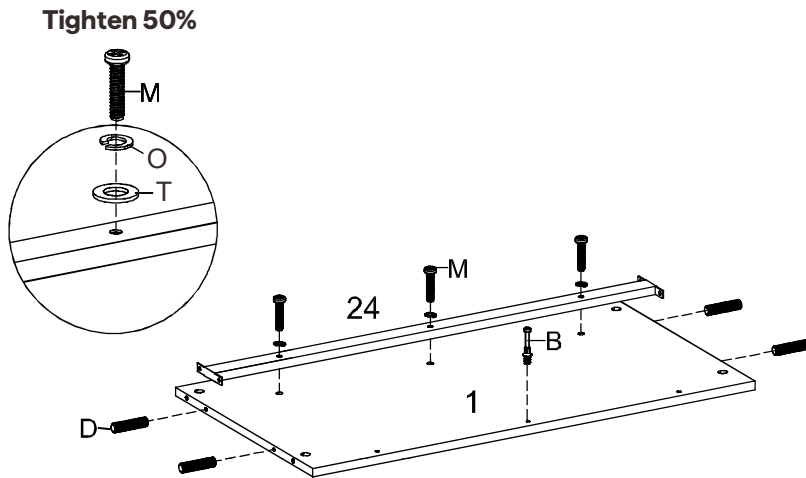

HARDWARE

B	Cam Bolt $\text{\O}7.5 \times 32\text{mm}$	x1
D	Plastic Dowel M6 x 30mm	x4
M	Screw 6 x 25mm	x3
O	Washer	x3
T	Washer Plate	x3

COMPONENTS

1	Top Board	x1
24	Metal Support	x1


TOOLS

1	Phillips Head Screwdriver	x1
----------	---------------------------	----

STEP 02

2.1 Insert and screw Cam Bolt (B) into Bottom Board (2). Flip the board 180° then screw again Cam Bolt (B) as shown.

2.2 Attach two Bottom Support (12) to Bottom Board (2) using screw (R).

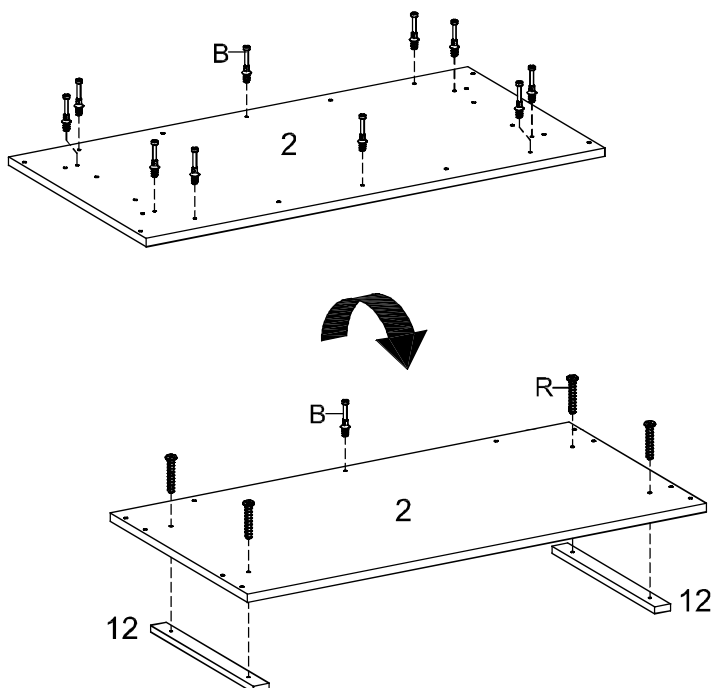

HARDWARE

B	Cam Bolt $\text{\O}7.5 \times 32\text{mm}$	x11
R	Screw 10 x 25mm	x4


COMPONENTS

2	Bottom Board	x1
12	Bottom Support	x2


TOOLS

1	Phillips Head Screwdriver	x1
----------	---------------------------	----

3.1 Insert Plastic Dowel (D) into Adjustable Shelf (5) as shown. Repeat on the other piece.

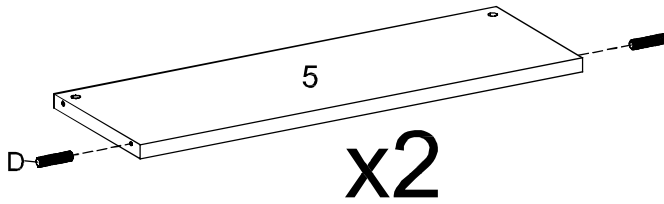

3.2 Insert Plastic Dowel (D) into Rear Board (6) as shown. Repeat on the other piece.

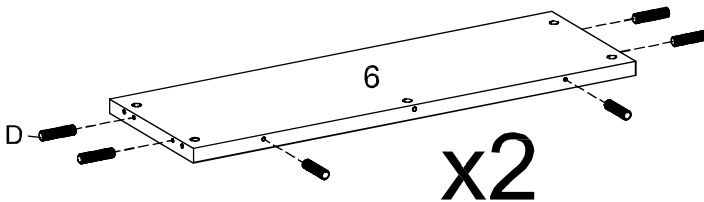

HARDWARE

D Plastic Dowel M6 x 30mm x16

COMPONENTS

5 Adjustable Shelf x2


6 Rear Board x2

STEP 04

4.1 Install Drawer Rail (I) to Left Board (3) using screw (G).

4.2 Insert and screw Cam Bolt (B) into Left Board (3).

4.3 Insert Plastic Dowel (D) into Left Board (3).

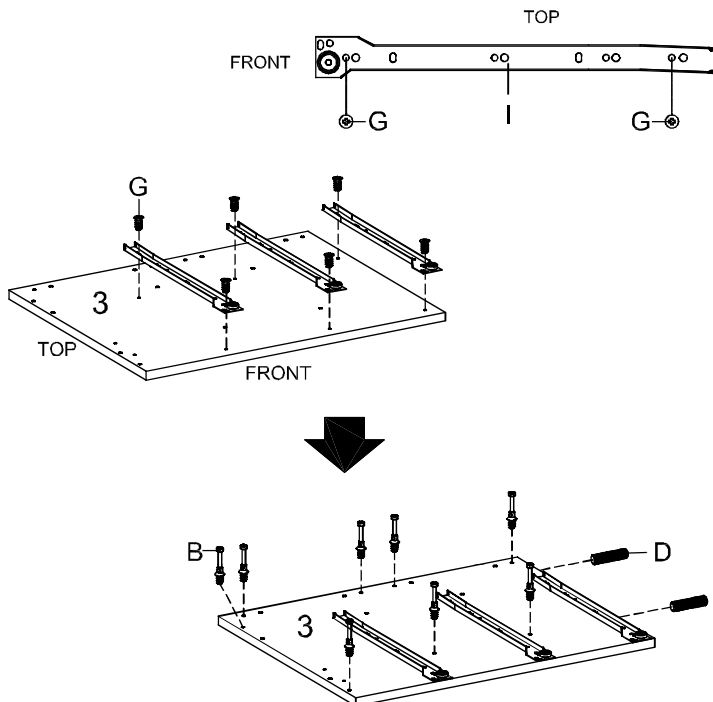

HARDWARE

B Cam Bolt $\varnothing 7.5 \times 32$ mm x8

D Plastic Dowel M6 x 30mm x2

G Screw 6 x 8mm x6

I Drawer Rail x3

COMPONENTS

3 Left Board x1


TOOLS

1 Phillips Head Screwdriver x1

5.1 Install Drawer Rail (I) to Right Board (4) using screw (G).

5.2 Insert and screw Cam Bolt (B) into Right Board (4).

5.3 Insert Plastic Dowel (D) into Right Board (4).

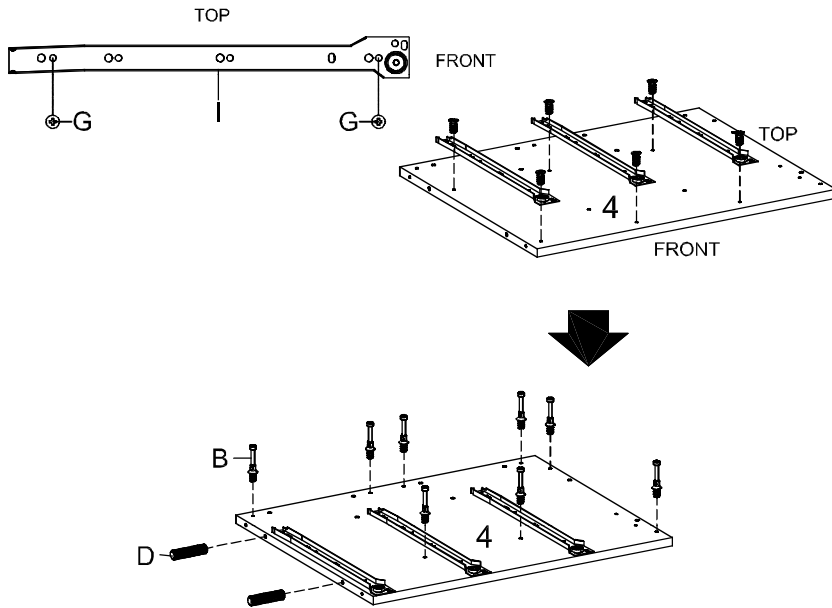

HARDWARE

B Cam Bolt $\varnothing 7.5 \times 32\text{mm}$ x8

D Plastic Dowel M6 x 30mm x2

G Screw 6 x 8mm x6

I Drawer Rail x3

COMPONENTS

4 Right Board x1


TOOLS

1 Phillips Head Screwdriver x1

STEP 06

6.1 Insert and screw Cam Bolt (B) into Left Leg (7). Insert Plastic Dowel (D) into Left Leg (7). Paste Sticker Foam (K) on the bottom side of the Left Leg (7) as shown.

6.2 Insert and screw Cam Bolt (B) into Right Leg (8). Insert Plastic Dowel (D) into Right Leg (8). Paste Sticker Foam (K) on the bottom side of the Right Leg (8) as shown.

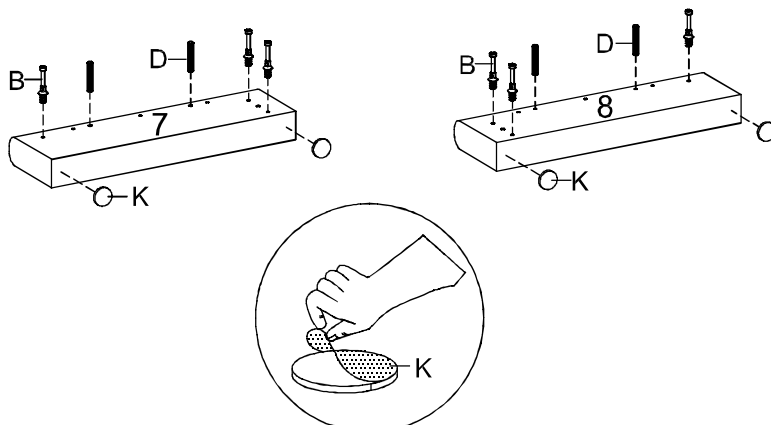

HARDWARE

B Cam Bolt $\varnothing 7.5 \times 32\text{mm}$ x6

D Plastic Dowel M6 x 30mm x4

K Sticker Foam x4

COMPONENTS


7 Left Leg x1

8 Right Leg x1


TOOLS

1 Phillips Head Screwdriver x1


7.1 Insert and screw Cam Bolt (B) into Front Support (9).
Insert Plastic Dowel (D) into Front Support (9) as shown.

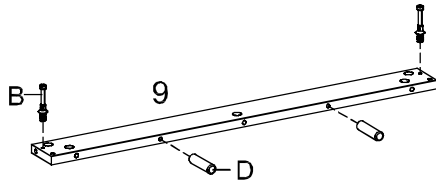

7.2 Insert and screw Cam Bolt (B) into Rear Support (10).
Insert Plastic Dowel (D) into Rear Support (10) as shown.

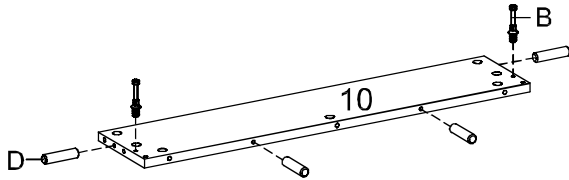

7.3 Insert Plastic Dowel (D) into Side Support (11) as shown.
Repeat on the other piece.

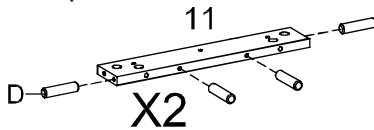

HARDWARE

- B** Cam Bolt Ø7.5 × 32mm x4
- D** Plastic Dowel M6 x 30mm x14

COMPONENTS

- 9** Front Support x1
- 10** Rear Support x1
- 11** Side Support x2

TOOLS


- 1** Phillips Head Screwdriver x1

STEP 08

8.1 Attach Front Support (9) and Rear Support (10) to Side Support (11) as shown.

8.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

8.3 Paste Cam Sticker (J) to the Cam Lock (A).

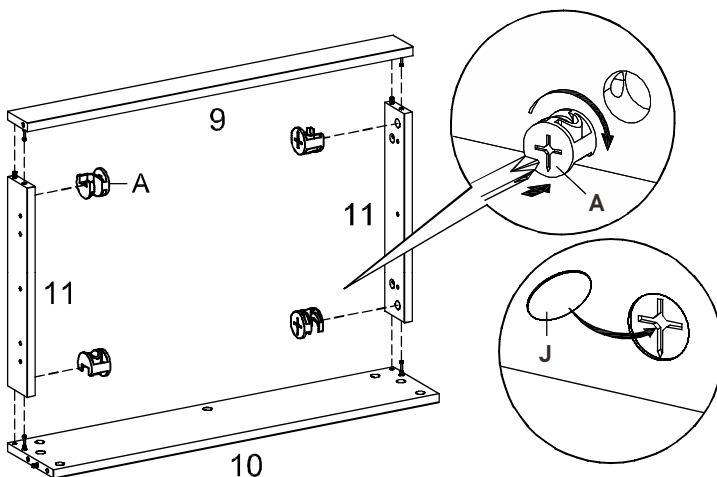

HARDWARE

- A** Cam Lock Ø15mm x4
- J** Cam Sticker (White) x4

COMPONENTS

- 9** Front Support x1
- 10** Rear Support x1
- 11** Side Support x2


TOOLS

- 1** Phillips Head Screwdriver x1

9.1 Attach Left Leg (7) and Right Leg (8) to assembled unit using Screw (E).

9.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

9.3 Paste Cam Sticker (J) to the Cam Lock (A).

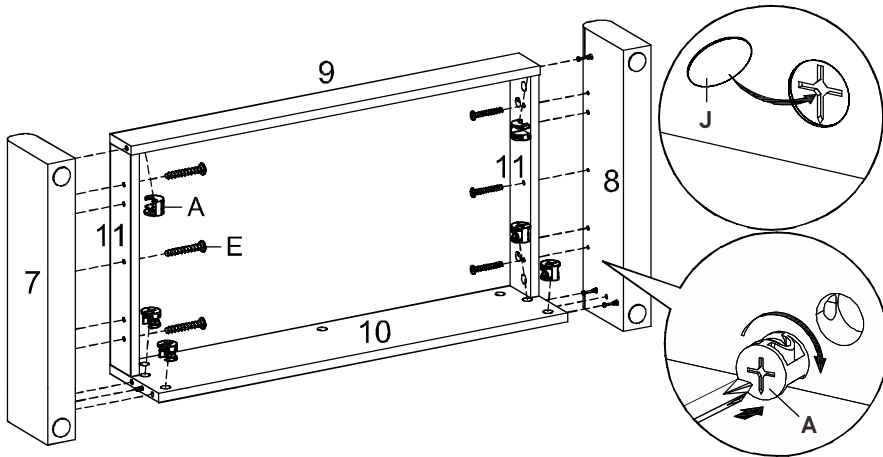

HARDWARE

A	Cam Lock Ø15mm	x6
E	Screw 10 x 33.5mm	x6
J	Cam Sticker (White)	x6

COMPONENTS

7	Left Leg	x1
8	Right Leg	x1
9	Front Support	x1
10	Rear Support	x1
11	Side Support	x2

TOOLS


1	Phillips Head Screwdriver	x1
----------	---------------------------	----

STEP 10

10.1 Attach Bottom assembled to Bottom Board (2) as shown.

10.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

10.3 Paste Cam Sticker (J) to the Cam Lock (A).

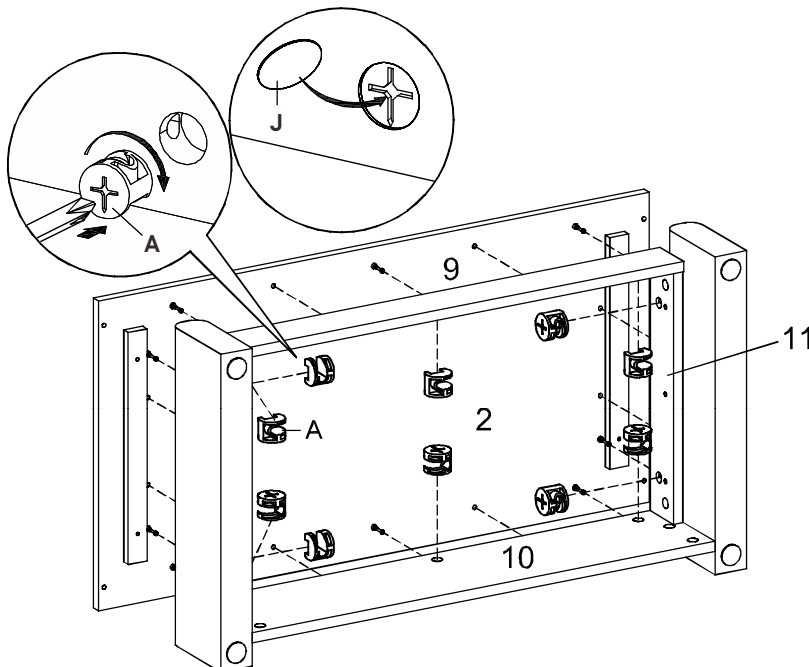

HARDWARE

A	Cam Lock Ø15mm	x10
J	Cam Sticker (White)	x10


COMPONENTS

2	Bottom Board	x1
9	Front Support	x1
10	Rear Support	x1
11	Side Support	x2

TOOLS

1	Phillips Head Screwdriver	x1
----------	---------------------------	----

11.1 Connect two Rear Board (6) using Plastic Dowel (D) as shown.

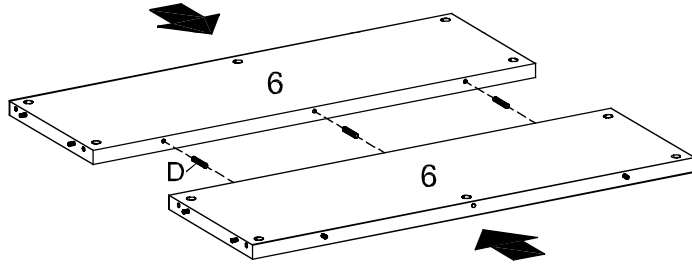

HARDWARE

D Plastic Dowel M6 x 30mm x3

COMPONENTS

6 Rear Board x2

STEP 12

HARDWARE

A Cam Lock Ø15mm x1

C Cam Sticker (Oak) x1

COMPONENTS

1 Top Board x1

6 Rear Board x1


TOOLS

1 Phillips Head Screwdriver x1

12.1 Attach Top Board (1) to Rear Board (6) as shown.


12.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

12.3 Paste Cam Sticker (C) to the Cam Lock (A).

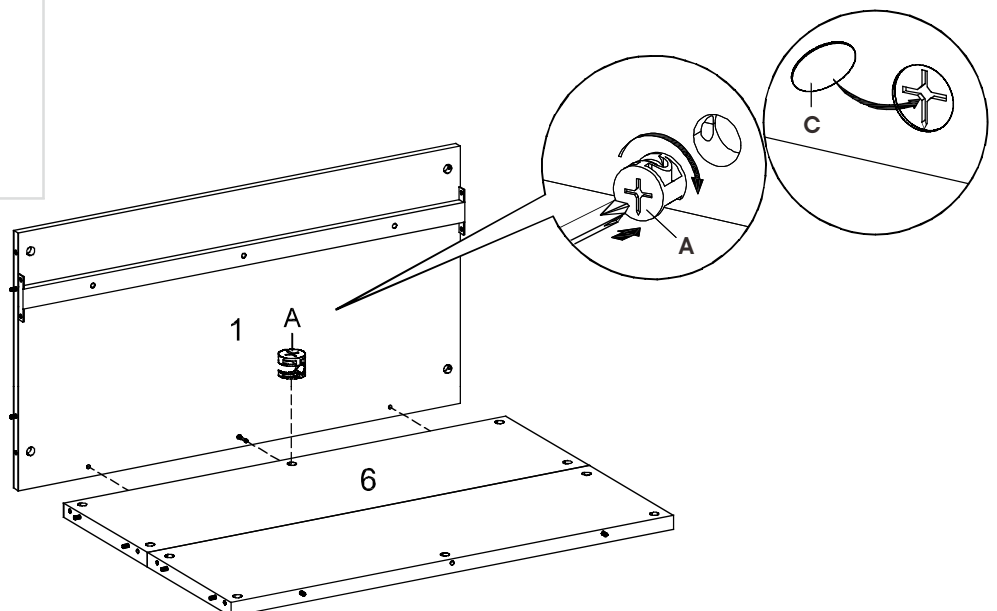

13.1 Attach Left Board (3) to the Assembled unit as shown.

13.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

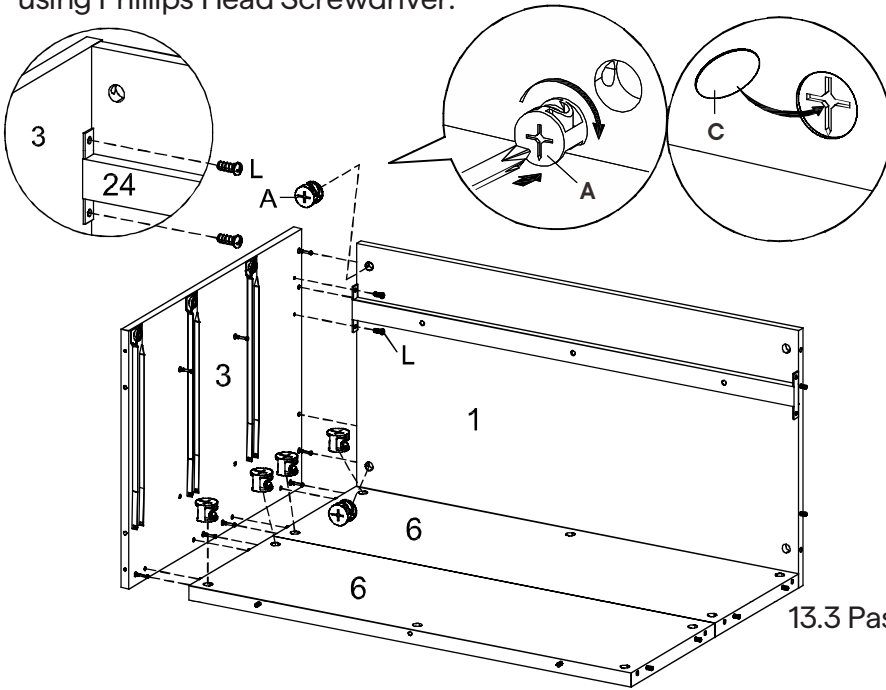

HARDWARE

- A** Cam Lock Ø15mm x6
- C** Cam Sticker (Oak) x6
- L** Screw 4 x 10mm x2

COMPONENTS

- 1** Top Board x1
- 3** Left Board x1
- 6** Rear Board x2
- 24** Metal Support x1

TOOLS

- 1** Phillips Head Screwdriver x1

13.3 Paste Cam Sticker (C) to the Cam Lock (A).

13.4 Tighten Metal Support (24) to Left Board (3) using screw (L).

STEP 14

HARDWARE

- A** Cam Lock Ø15mm x2
- C** Cam Sticker (Oak) x2

COMPONENTS

- 3** Left Board x1
- 5** Adjustable Shelf x2



TOOLS

- 1** Phillips Head Screwdriver x1

14.1 Attach two Adjustable Shelf (5) to Left Board (3) as shown.

14.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

14.3 Paste Cam Sticker (C) to the Cam Lock (A).

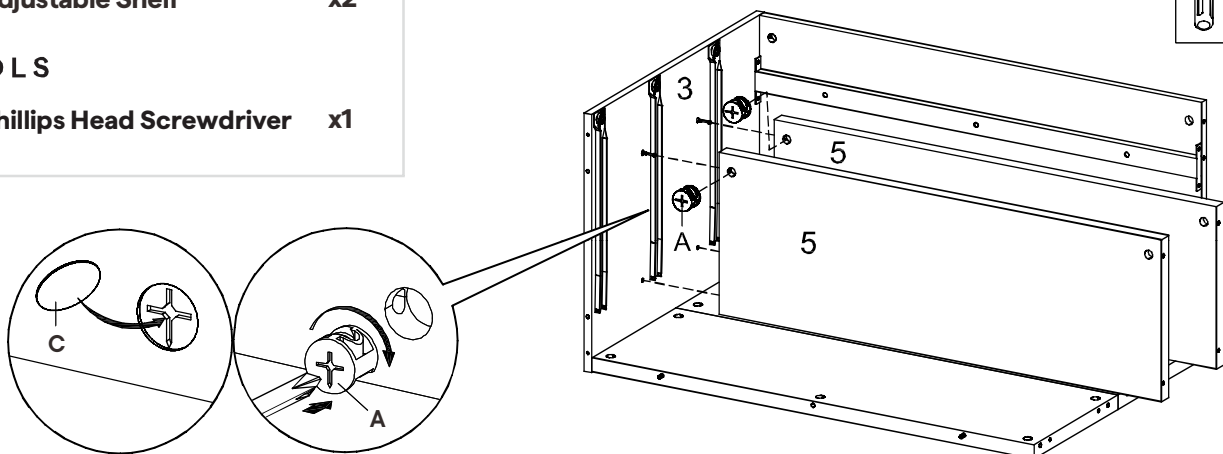

HARDWARE

A Cam Lock Ø15mm	x8
C Cam Sticker (Oak)	x8
L Screw 4 x 10mm	x2

COMPONENTS


1 Top Board	x1
4 Right Board	x1
5 Adjustable Shelf	x2
6 Rear Board	x2
24 Metal Support	x1

TOOLS

1 Phillips Head Screwdriver	x1
------------------------------------	----

15.1 Attach Right Board (4) to the Assembled unit as shown.

15.2 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver.

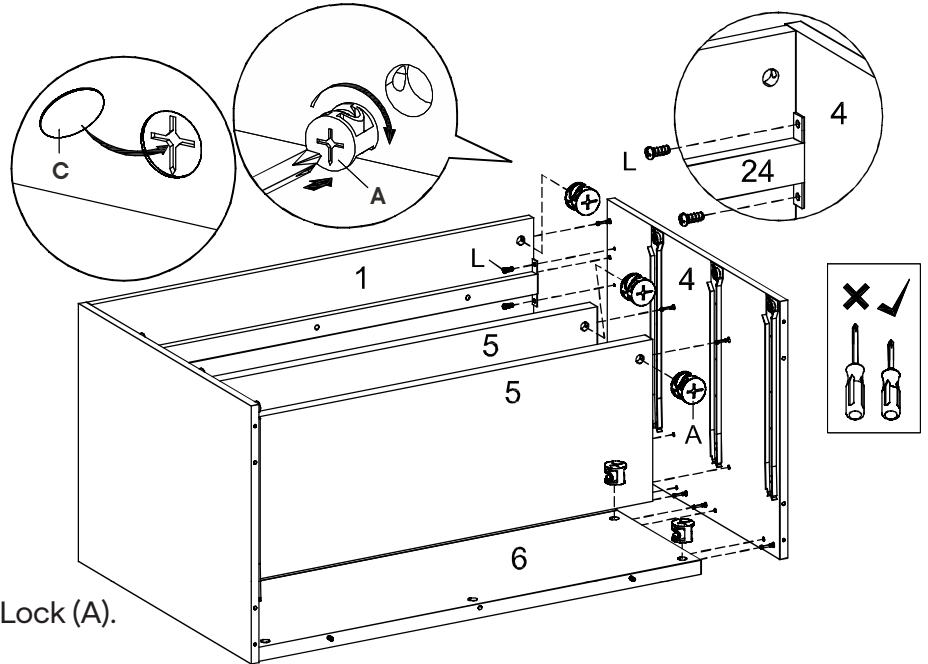

15.3 Paste Cam Sticker (C) to the Cam Lock (A).

15.4 Tighten Metal Support (24) with Right Board (4) using screw (L).

STEP 16

HARDWARE

A Cam Lock Ø15mm	x1
C Cam Sticker (Oak)	x1
E Screw 10 x 33.5mm	x4
M Screw 6 x 25mm	x3

COMPONENTS

1 Top Board	x1
2 Bottom Board	x1
3 Left Board	x1
4 Right Board	x1
6 Rear Board	x1
24 Metal Support	x1


TOOLS

1 Phillips Head Screwdriver	x1
------------------------------------	----

16.1 Attach Bottom assembled to the assembled unit using screw (E).


16.2 Tighten Screw (M) until 100% fix.

16.3 Insert Cam Lock (A) to the assembled unit, then tighten it using Phillips Head Screwdriver. Paste Cam Sticker (C) to the Cam Lock (A).

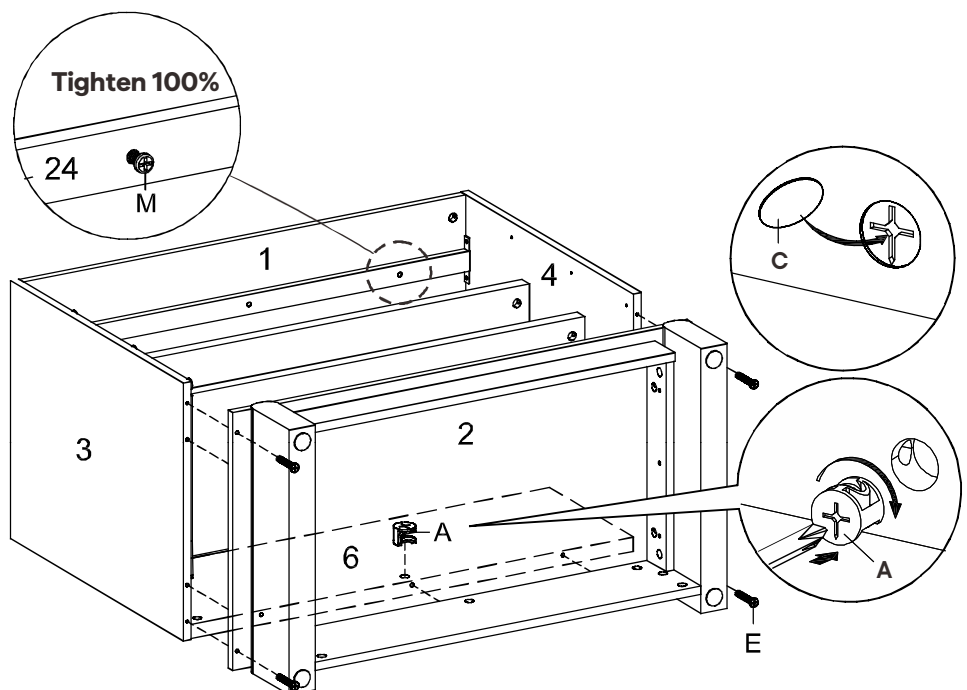


17.1 Insert Plastic Dowel (D) into Top Rear Drawer (13), Top Left Drawer (14) and Top Right Drawer (15) as shown.


Repeat to the other piece.

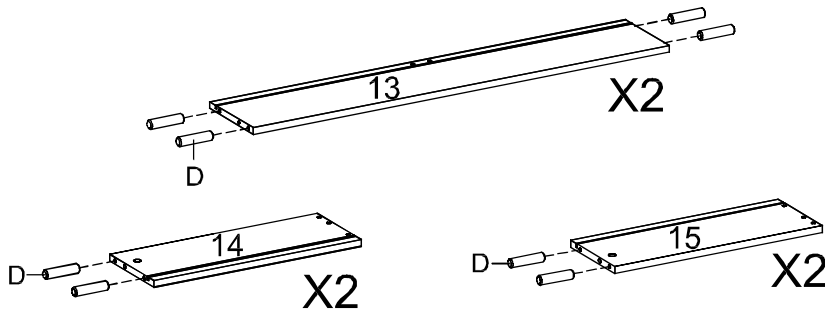

17.2 Insert Plastic Dowel (D) into Bottom Support Drawer (17) as shown. Repeat to the other two pieces.




17.3 Insert Plastic Dowel (D) into Bottom Rear Drawer (18), Bottom Left Drawer (19) and Bottom Right Drawer (20) as shown.

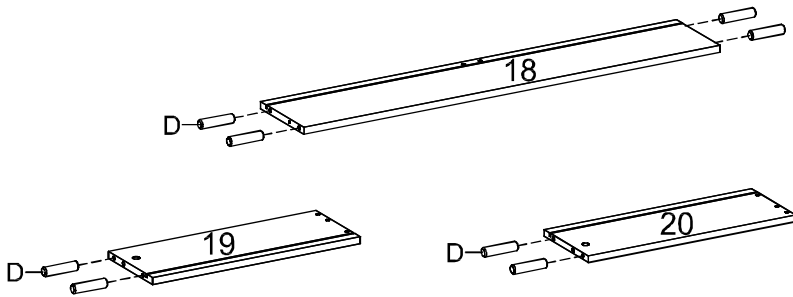

17.4 Insert and screw Cam Bolt (B) into Bottom Front Drawer (22) as shown.


Attach Handle (Q) to Bottom Front Drawer (22) using screw (P).

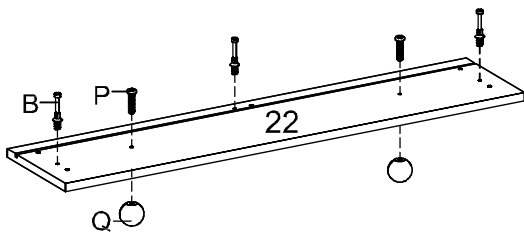

17.4 Insert and screw Cam Bolt (B) into Top Front Drawer (23) as shown.

Attach Handle (Q) to Top Front Drawer (23) using screw (P).

Repeat to the other piece.

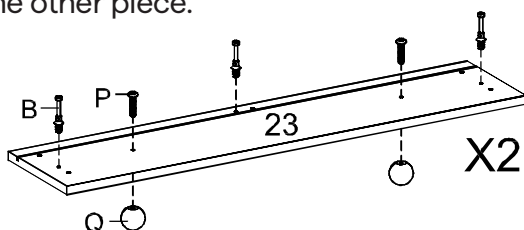

HARDWARE

B	Cam Bolt $\varnothing 7.5 \times 32\text{mm}$	x9
D	Plastic Dowel M6 x 30mm	x30
P	Screw 4 x 25mm	x6
Q	Handle	x6

COMPONENTS

13	Top Rear Drawer	x2
14	Top Left Drawer	x2
15	Top Right Drawer	x2
17	Bottom Support Drawer	x3
18	Bottom Rear Drawer	x1
19	Bottom left Drawer	x1
20	Bottom Right Drawer	x1
22	Bottom Front Drawer	x1
23	Top Front Drawer	x2

TOOLS

1	Phillips Head Screwdriver	x1
----------	---------------------------	----

HARDWARE

E Screw 10 x 33.5mm x6

COMPONENTS

13 Top Rear Drawer x2

14 Top Left Drawer x2

15 Top Right Drawer x2

16 Upper Bottom Drawer x2


17 Bottom Support Drawer x2

TOOLS

1 Phillips Head Screwdriver x1

18.1 Attach Top Left Drawer (14), Top Right Drawer (15) and Bottom Support Drawer (17) to Top Rear Drawer (13) using screw (E). Repeat to the other piece.

18.2 Insert Upper Bottom Drawer (16) to the drawer assembled. Repeat to the other piece

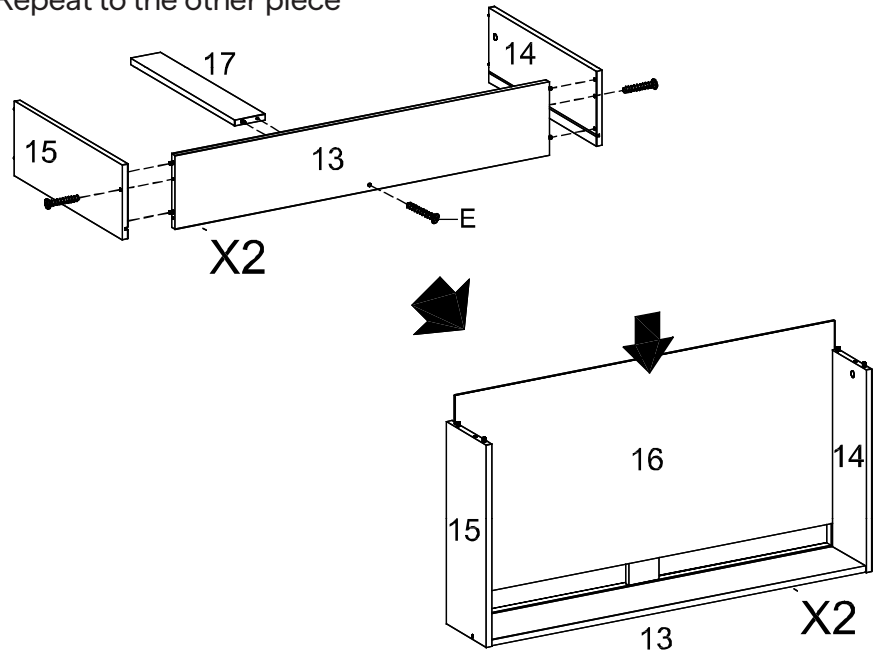

STEP 19

HARDWARE

C Cam Sticker (Oak) x4

I Cam Lock Ø12mm x6

COMPONENTS

14 Top Left Drawer x2

15 Top Right Drawer x2

16 Upper Bottom Drawer x2

17 Bottom Support Drawer x2

23 Top Front Drawer x2


TOOLS

1 Phillips Head Screwdriver x1

19.1 Attach Top Front Drawer (23) to the drawer assembled.

19.2 Insert Cam Lock (I) to the Drawer assembled, then tighten it using Phillips Head Screwdriver.

19.3 Paste Cam Sticker (C) to the Cam Lock (I). Repeat to the other two Drawer assembled.

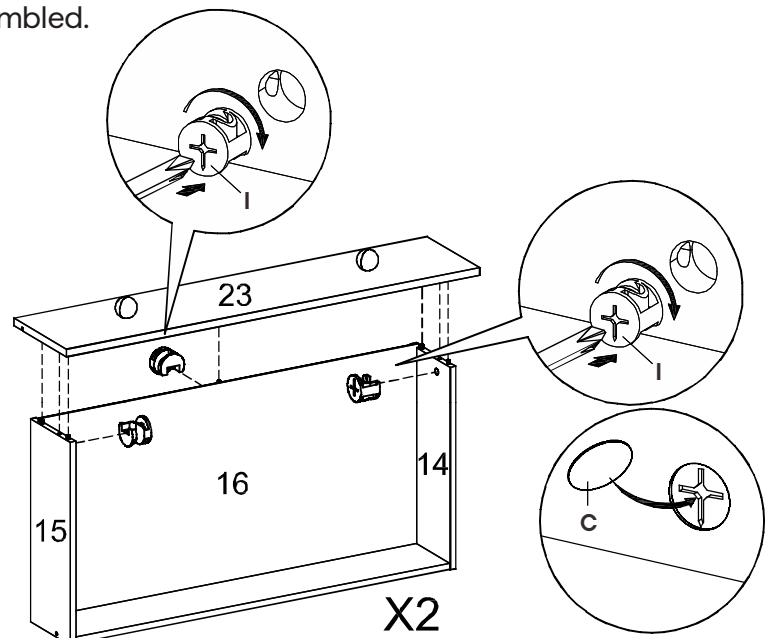

HARDWARE

E Screw 10 x 33.5mm x3

COMPONENTS

17 Bottom Support Drawer x1

18 Bottom Rear Drawer x1

19 Bottom Left Drawer x1

20 Bottom Right Drawer x1


21 Lower Bottom Drawer x1

TOOLS

1 Phillips Head Screwdriver x1

22.1 Attach Bottom Left Drawer (19), Bottom Right Drawer (20) and Bottom Support Drawer (17) to Bottom Rear Drawer (18) using screw (E).

22.2 Insert Lower Bottom Drawer (21) to the drawer assembled.

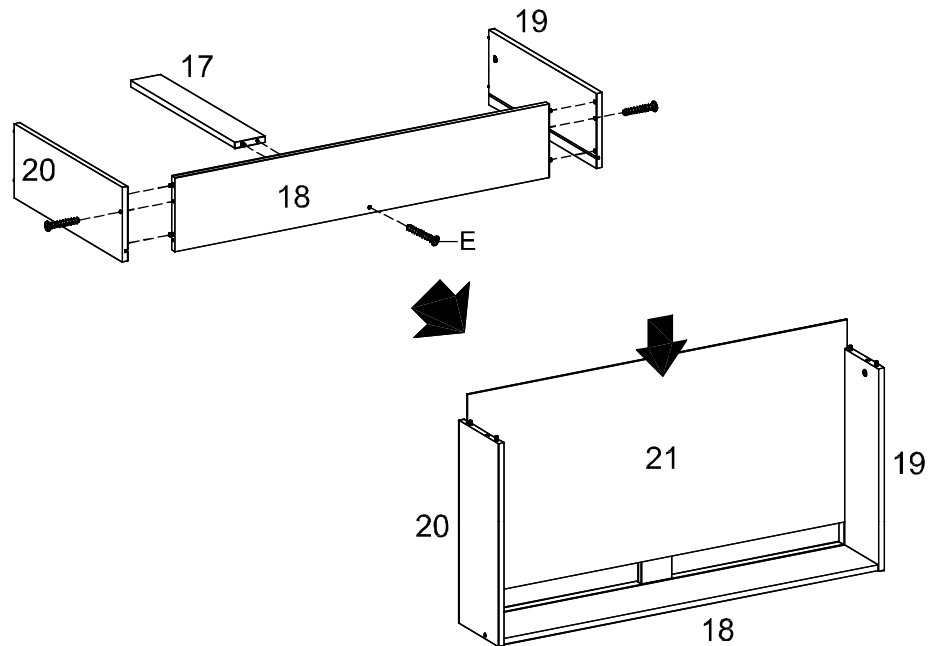

STEP 21

HARDWARE

I Cam Lock \varnothing 12mm x3

J Cam Sticker (White) x2

COMPONENTS

17 Bottom Support Drawer x1

19 Bottom Left Drawer x1

20 Bottom Right Drawer x1

21 Lower Bottom Drawer x1

22 Bottom Front Drawer x1


TOOLS

1 Phillips Head Screwdriver x1

21.1 Attach Bottom Front Drawer (22) to the drawer assembled.

21.2 Insert Cam Lock (I) to the Drawer assembled, then tighten it using Phillips Head Screwdriver.

21.3 Paste Cam Sticker (J) to the Cam Lock (I). Repeat to the other two Drawer assembled.

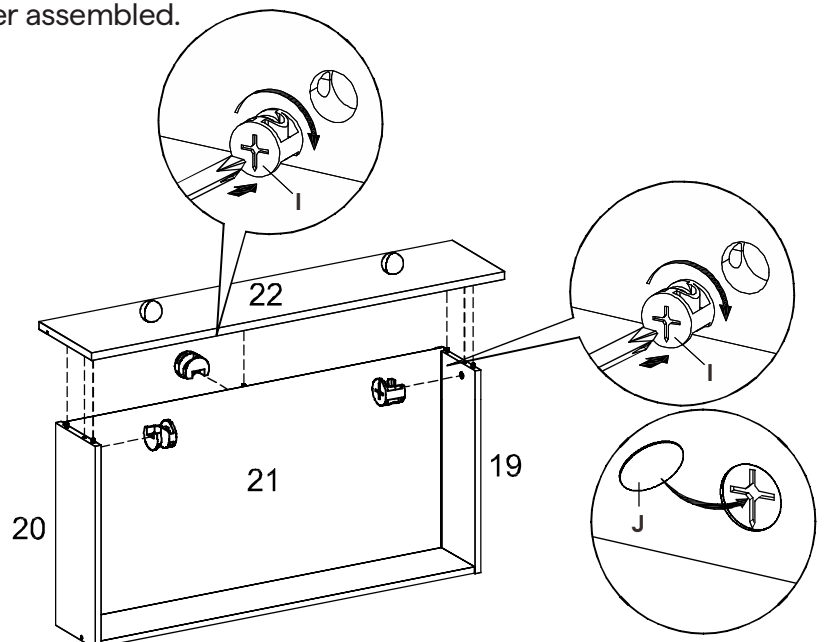

HARDWARE

(N) Screw 4 x 19mm x12

(S) Backply Stopper x12

COMPONENTS

(14) Top Left Drawer x2

(15) Top Right Drawer x2

(16) Upper Bottom Drawer x2

(19) Bottom Left Drawer x1

(20) Bottom Right Drawer x1

(21) Lower Bottom Drawer x1




(22) Bottom Front Drawer x1

(23) Top Front Drawer x2

TOOLS

(1) Phillips Head Screwdriver x1

22.1 Install Backply Stopper (S) to the bottom side of the drawer using screw (N).

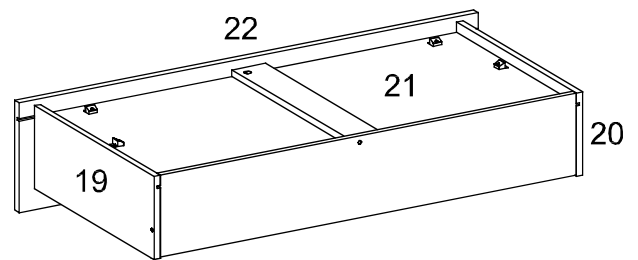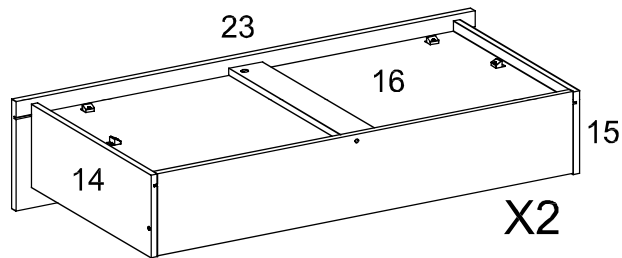

STEP 23

HARDWARE

(H) Screw 6 x 13mm x12

(I) Drawer Rail x3

COMPONENTS

(14) Top Left Drawer x2

(15) Top Right Drawer x2


(19) Bottom Left Drawer x1

(20) Bottom Right Drawer x1

TOOLS

(1) Phillips Head Screwdriver x1


25.1 Install Drawer Rail (I) on the edge of the Drawer assembled using screw (H).

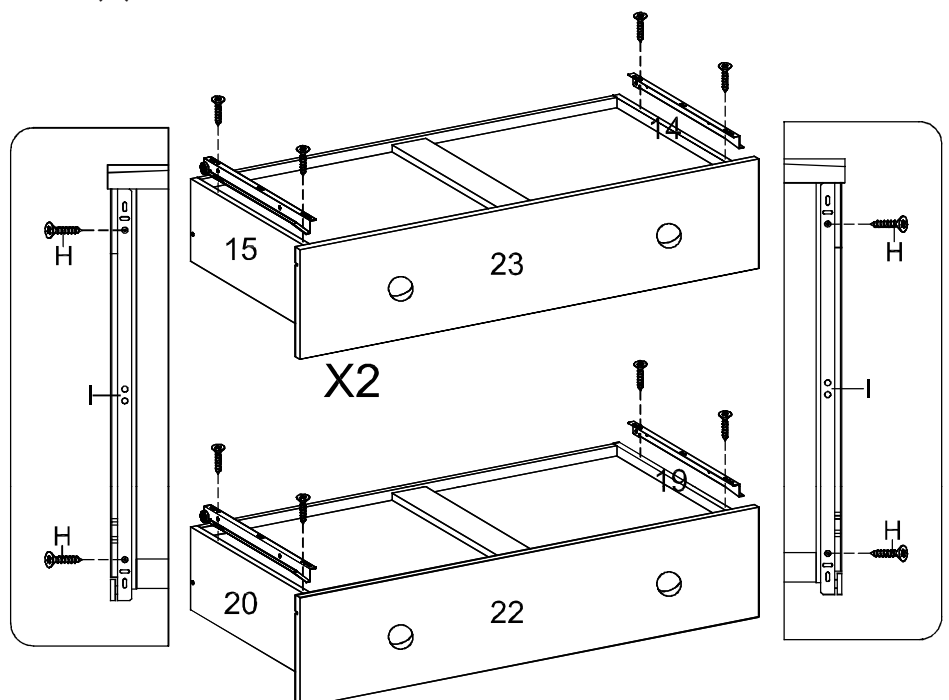

COMPONENTS

22 Bottom Drawer	x1
23 Top Drawer	x2



24.1 Insert all the drawers into the Chest as shown.

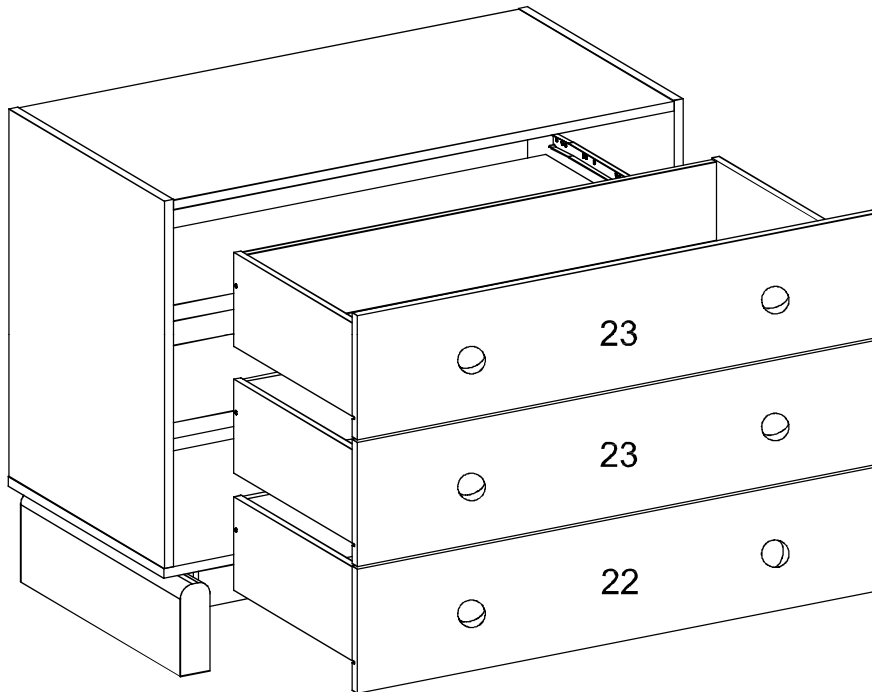

TIPPING RESTRAINTS KIT INSTALLATION GUIDANCE

Different wall materials require unique wall fasteners.

Please consult your local hardware store to ensure you are using the correct hardware for you wall type.

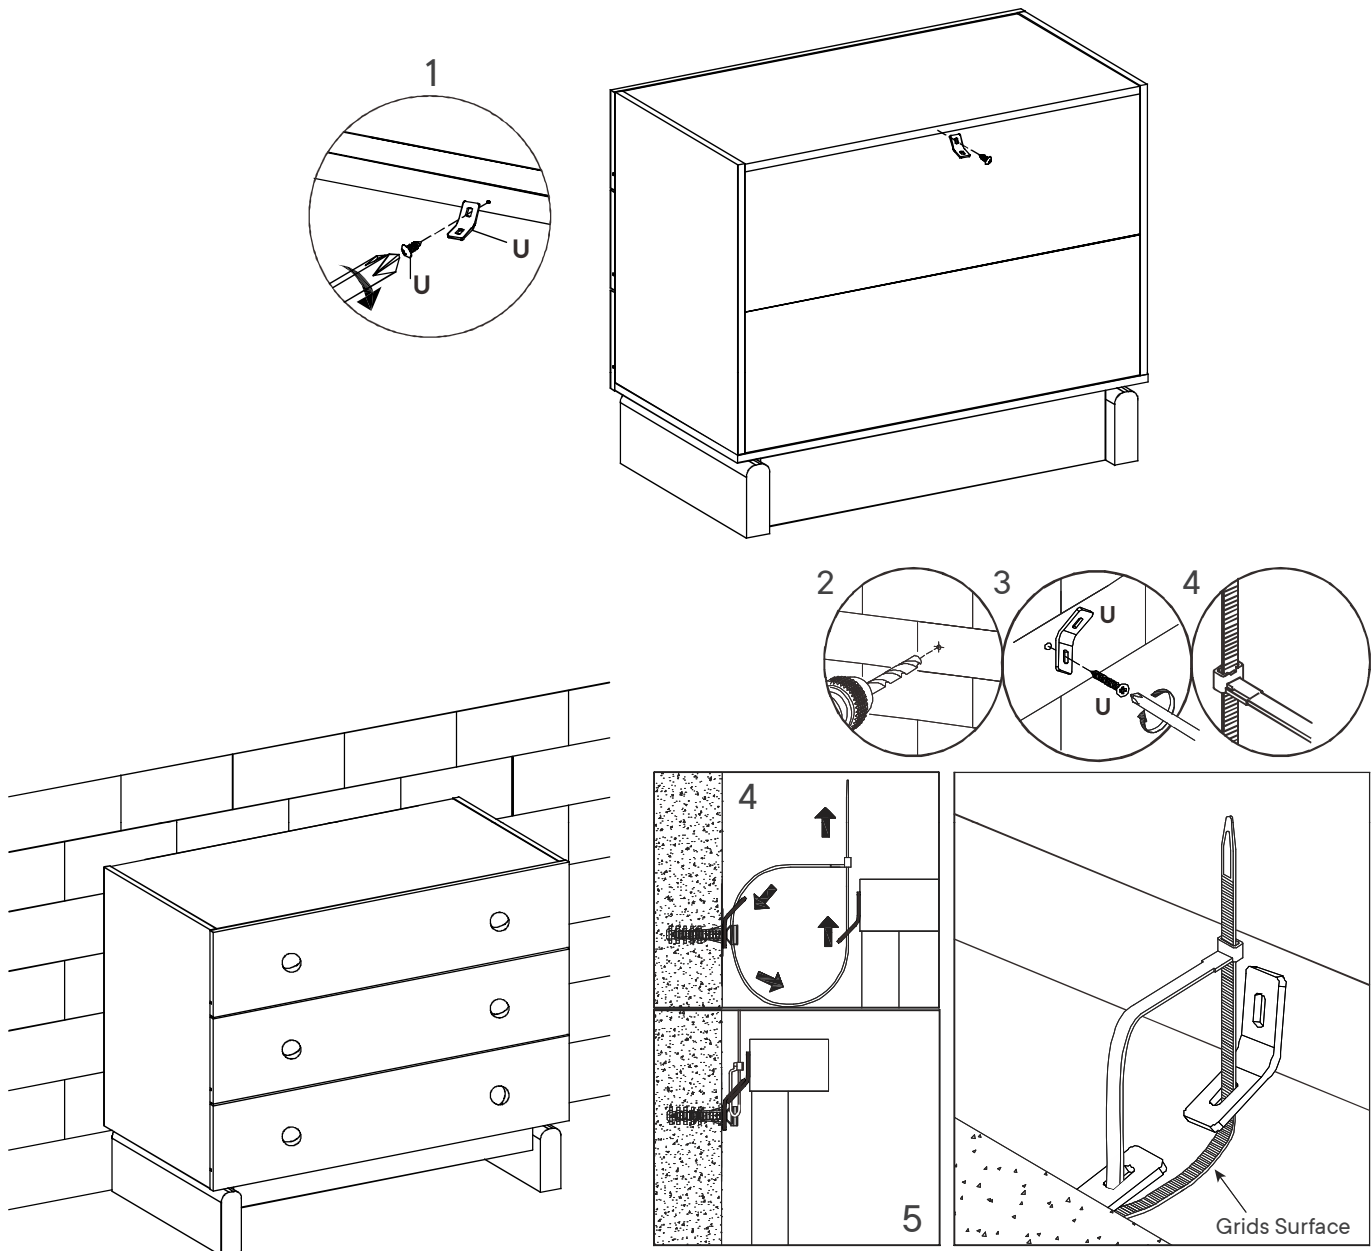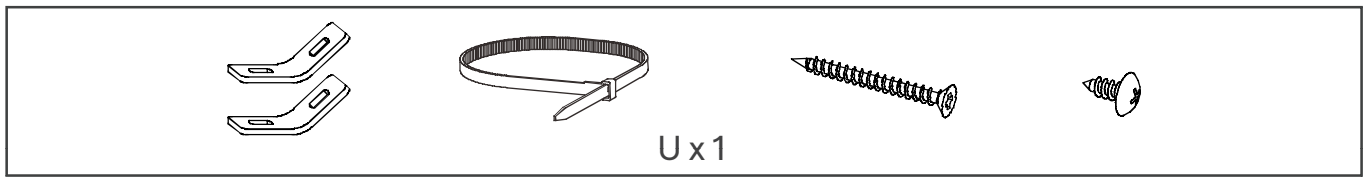

Installation Instructions :


1. Attach bracket (U) securely to the back top of the furniture using short screw (U) provided.
2. Please make a hole on the wall for attach the bracket (U) to the back of unit.
3. Attach bracket (U) on the wall using long screw (U) as shown.
Locate the other bracket (U) on the wall. Place furniture into position so both brackets (U) as shown.
4. Lace the end of the restrains strap through the larger hole in each bracket. Ensure the restrains strap with grids surface facing the inner loops. Bring both ends together and slide the flat end through the locking end and draw it through until all slack is removed.
5. Make sure that the strap is securely laced & locked.

Great job!

3 Drawer Chest assembly is complete.

CARING FOR YOUR ITEM

- Indoor use only.
- Not contract grade.
- Clean using a non-abrasive cloth and a mild cleaner.
- Never use harsh chemicals, as they could damage the finish or integrity of the item.

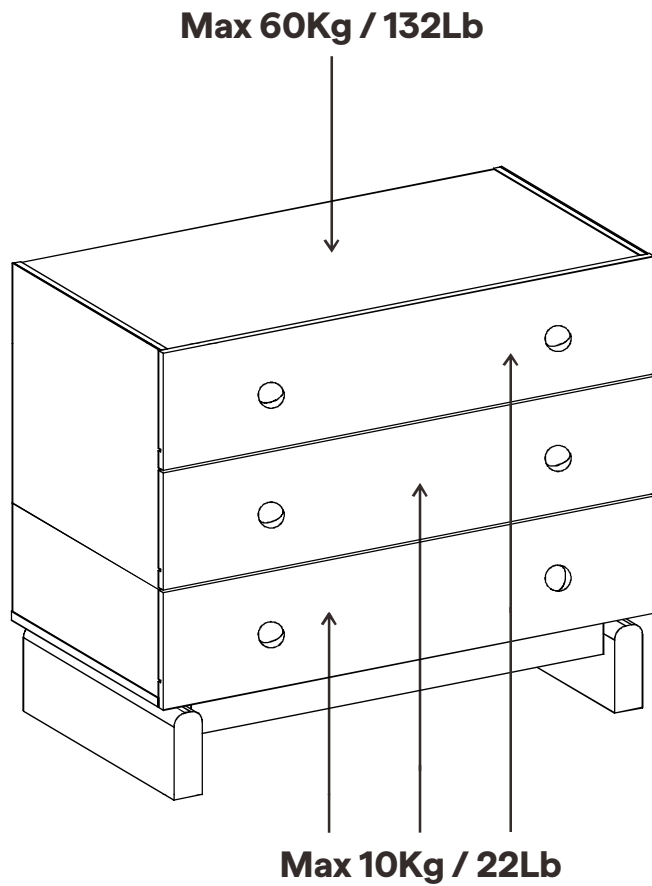

CONNECT WITH US!

Tag us @modway_furniture and #modway for a chance to be featured.

modway



Questions? Contact us!
609.256.9000
cs@modway.com