

**EV61093MPK50WH**  
**EV61093K50WH & EVMP6HBMJ2W-I)**

**6" LED SELECTABLE CCT BAFFLE W/ NEW CONSTRUCTION  
 MOUNTING FRAME**




Project \_\_\_\_\_ Date \_\_\_\_\_

Prepared By \_\_\_\_\_

Comments \_\_\_\_\_

## BASIC FEATURES & INFO

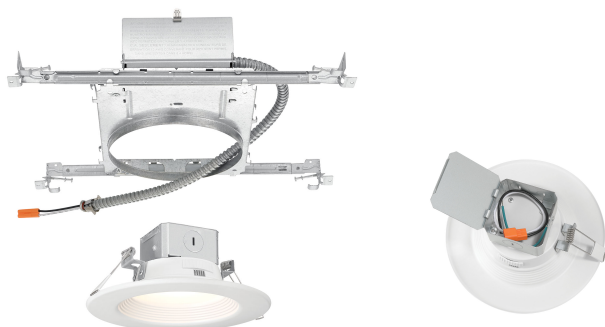

- Energy Savings of up to 85%
- New Construction Mounting Frame with 4-in/4-out Junction Box
- IC rated for direct contact with insulation
- Quick Connector Save Installation Time
- Compatible w/ Most Triac Phase-Control Dimmers
- Suitable for Damp Locations
- Lumen Maintenance over 70% at 50,000+ Hours
- 5 Year Warranty

## APPLICATIONS

- Hotels and Hospitality Areas
- Residential Remodels

## OPTICS

- White Diffuser

## TECHNICAL SPECIFICATIONS

Dimensions (WxHxD)	7.38" x 7.38" x 3"
Weight	1.7 lbs.
Voltage	AC 120 V
Lumens	1000 LM
Wattage	10 W
Efficacy (lm/W)	100 LM/W
CCT (Selectable)	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90
Expected Diode Life	50,000 Hours
Max. Ambient Temp.	113°F / 45° C
Min. Starting Temp.	-4° F / -20° C
Power Factor	0.9

## CERTIFICATIONS

- ETL listed (US) for Damp Locations
- Energy Star listed for Rebates and Tax Incentive Programs
- California Title 24 Compliant





Project:  Date:

Prepared By:

Comments:

## DIMMER LIST

January 12, 2023					DRF6WHWH9105C	Triac/Forward Phase-cut dimmers		
Brand	Series	Model #	Wiring	watts	dimming method	Max # of Luminaires	Notes	dimming range
Lutron	Ariadni/Toggler LED+	AYCL-153P	Single-pole/3-way	150	Toggler slide with ON/OFF button	13	3-Way only works with a 3-Way switch	0% - 103%
	Divia LED+	DVCL-153P						
	Skylark LED+	SCL-153P						
	Skylark Contour LED+	CTCL-153P						
	Lumea LED+	LGCL-153P						
	Maestro LED+	MACL-153M	Single-pole/3-way/multi-location	150	Touch	13	3-Way only works with a 3-Way switch or dimmer companion MA-R (not a dimmer). Multi-location only work with MA-R	0% - 103%
Leviton	Sunnata	STCL-153P	Single-pole/3-way	150	Touch and Wireless	13	3-Way only works with a 3-Way switch	0% - 103%
	Caseta	PD-6WCL	Single-pole or multi-location	150	Touch and Wireless	13	Multi-location only works with Pico wireless remote PJ2, Amazon alexa, Google Assistant, Apple HomeKit, Apple Watch	0% - 103%
	Decora	DSL06	Single-pole/3-Way	300	Rocker with Slide Bar	26	3-Way only works with a 3-Way switch	0% - 102%
	Trimatron	RNL06	Single-pole	150	Rotary	13	3-Way only works with a 3-Way switch	0% - 102%
	Decora Smart	DW1KD	Single-pole/3-Way	450	Touch and Wi-Fi	39	3-Way only works with remote DDOOR Requires neutral wire connection	0% - 102%
	Sureslide	6674	Single-pole/3-Way	150	slide with ON/OFF button	13	3-Way only works with a 3-Way switch	0% - 102%
Legrand	Radiant	RHCL453	Single-pole/3-Way	450	slide with ON/OFF button	39	3-Way only works with a 3-Way switch	0% - 102%
Commercial Electric	Smart Dimmer With Motion Sensor	1006456159	Single-pole	150	Touch and Wi-Fi	13		0% - 102%

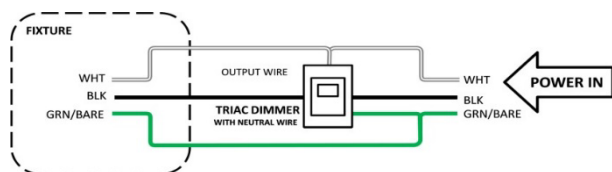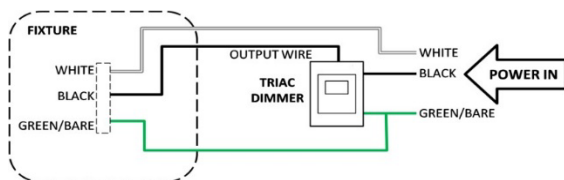

EnviroLite  
(855) 573-6156 | [info@envirolite-led.com](mailto:info@envirolite-led.com)

Specifications subject to change without notice

© Copyright 2022