


G16.5

E12 "Candelabra" Screw Base



60w*
Equivalent

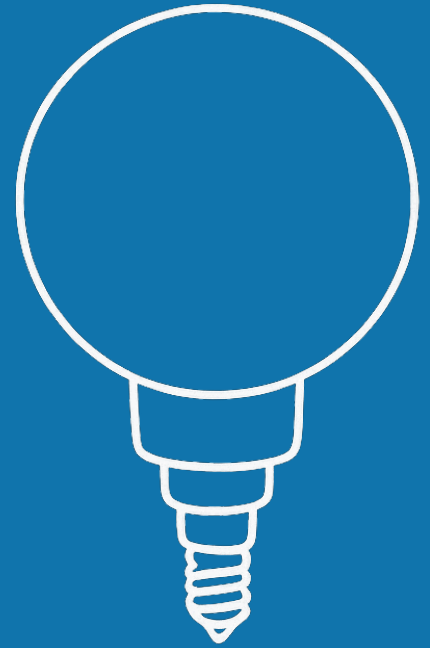

5.5w
Actual Wattage



500
Lumens



90
Color Rendering Index (CRI)



Wet Rated



**Suitable for
Enclosed
Fixtures**



Dimmable


How to install screw base bulbs (E12 & E26):

Turn off the power



Turn off the light switch or flip the corresponding circuit breaker to ensure power is completely disconnected before touching the fixture.

Remove the old bulb



(if applicable) Remove the existing bulb by turning it counterclockwise (to the left) until it is full free from the socket.

Install the new bulb



Line up the metal threads on the bulb to the threads on the socket. Then, begin turning the bulb clockwise (to the right) until it is firmly sealed and stops turning.

Minimum operating temperature: -4F

*Light output similar to 60-watt incandescent bulb

**Life based on 3hrs/day

Each bulb saves up to \$98.92 USD in energy costs over the rated life (16,500 hours) of the bulb compared to a 60-watt (1000 hours) incandescent bulb. Based on 11c/kWh.

3-YEAR WARRANTY: This bulb has a 3-year warranty. If it fails or you are not satisfied with the performance, return it to the place of purchase for a replacement. This replacement is the sole remedy available and liability for incidental or consequential damage is expressly excluded.



Intertek

RoHS
Compliant

This bulb meets European Union restrictions on hazardous substances.