



PACKAGE CONTENTS

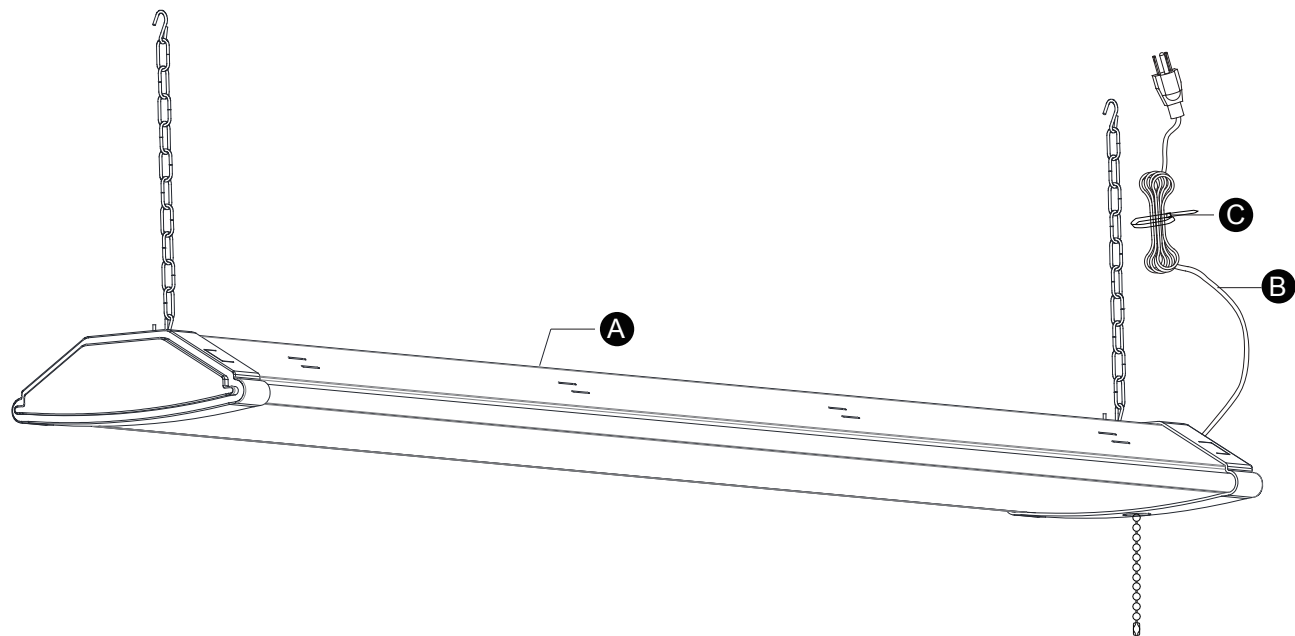

HARDWARE CONTENTS Note: Hardware not shown actual size.

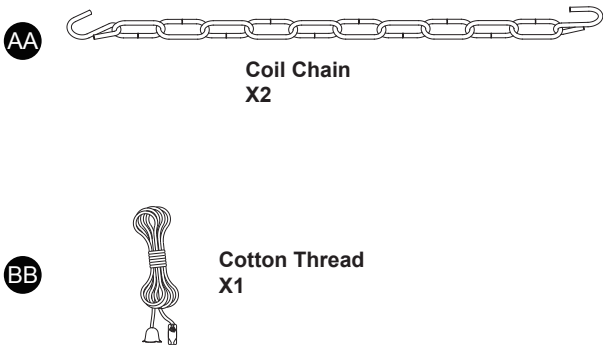

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- LED electronics can be damaged by electro static discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

CAUTION

- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.
- If a dimmer control switch is used with this fixture, obtain professional advice to determine the correct type and electrical rating required.

PREPARATION


Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Screwdriver, Phillips Screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder, Wire Stripper.


ASSEMBLY INSTRUCTIONS

Select suitable location that can support the weight of the fixture and has an outlet on the ceiling to insure that the fixture hangs properly. Make two spots on the ceiling 44.5 inches apart for the mounting hardware(not included).


1. For mounting to drywall, drill 1/4 inch holes and install toggle bolts with hanging hooks(not included). For mounting to wood, drill 1/16 inch diameter pilot holes and install wood screws with mounting hooks.



3. Hang fixture body(A) by placing one coil chain(AA) over each hook installed in the ceiling. Adjust the coil chains(AA) as needed to level the fixture body(A). Note: Fixture must hang at least 3 inches from ceiling.




2. Install two coil chains(AA) to fixture body(A).



4. Fold the excess cord(B) and fasten it using the cable tie(C) (not included).

Insert the power cord plug into the ceiling receptacle.

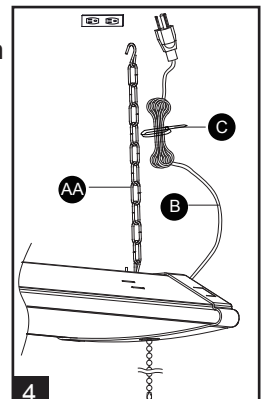

The following parts are available for re-order if damaged or missing. Call us toll-free at 1-800-887-6326

Spare Parts List:

AA



Coil Chain
X2

BB



Cotton Thread
X1

Assembly Kit
5590MM (1 SET)

CARE AND MAINTENANCE

- Periodically, dust the diffuser (outside) with a clean, dry cloth. Wipe clean with a slightly damp cloth as needed. Never use abrasive cleansers.

TROUBLESHOOTING

1) The light does not come on at all:

- Make sure the pull chain is in "ON" position.

If unable to fix any of the above issues, please consult a certified electrician.