
#### INSTALLATION

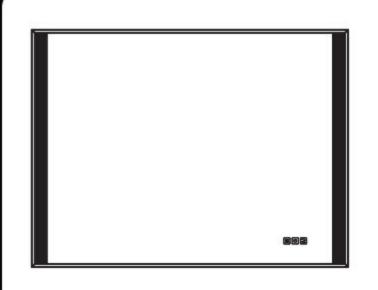

MEIRA-W18FM2836/3236/3636

Colors/Finishes::Matte Black(MB), Brushed Gold(BG),White(WT)

## LIGHTED FRAME MIRROR Lighting and Defogger

## IMPORTANT SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, Requires two(2) person in installation.



## DANGER

# READ AND FOLLOW ALL INSTRUCTIONS BEFORE USING THIS MIRROR.



## WARNING

To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.



## WARNING

Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See Grounding instructions.

## **GROUNDING INSTRUCTIONS:**



## WARNING


This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

An Electrical option cabinet must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.

**NOTE:** To ensure the normal use of product, it is required to set out wires as per the regulations of IEE. The product is only applicate to the indoor installation. The installation must be executed by a professional electrician, wrong installation may lead to product damage and personal injury.

PLEASE SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

ALL RIGHTS RESERVED

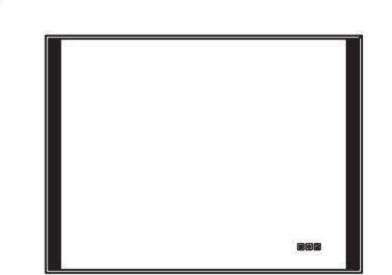


#### MEIRA-W18FM2836/3236/3636

Colors/Finishes::Matte Black(MB), Brushed Gold(BG),White(WT)


INSTALLATION


## LIGHTED FRAME MIRROR Lighting and Defogger

## TOOLS REQUIRED FOR ASSEMBLY

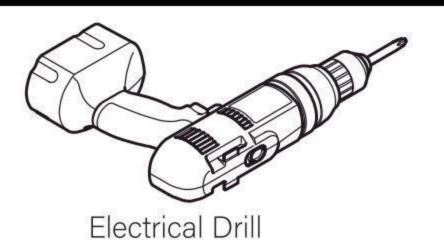












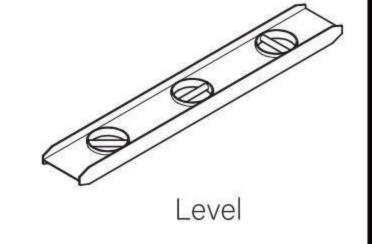


## PARTS INCLUDED

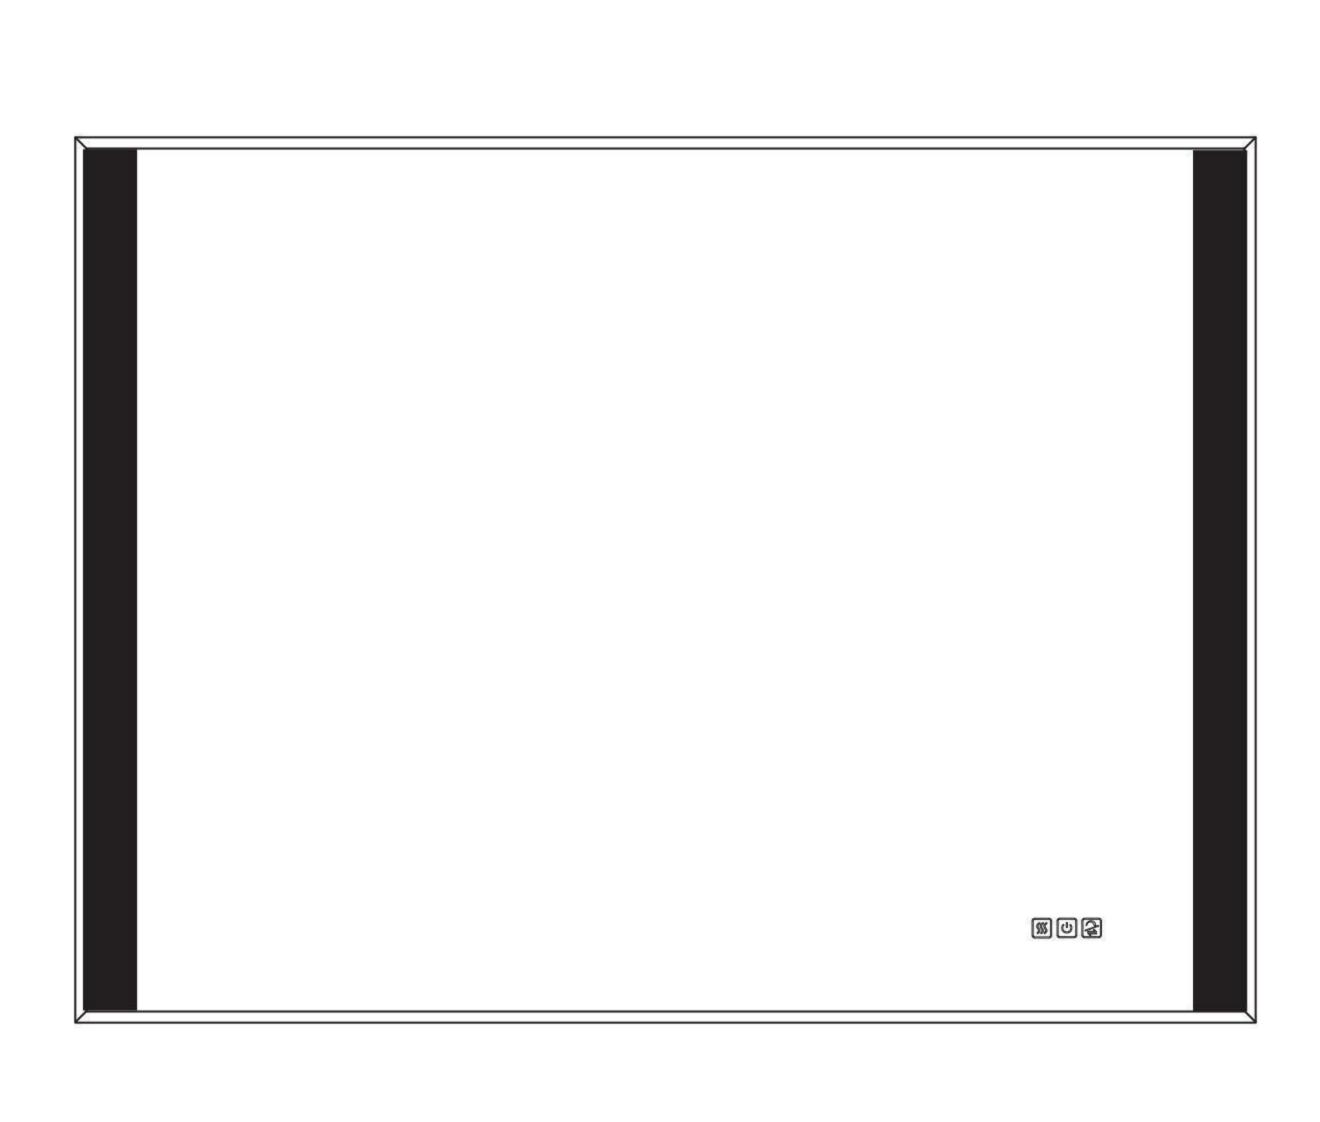


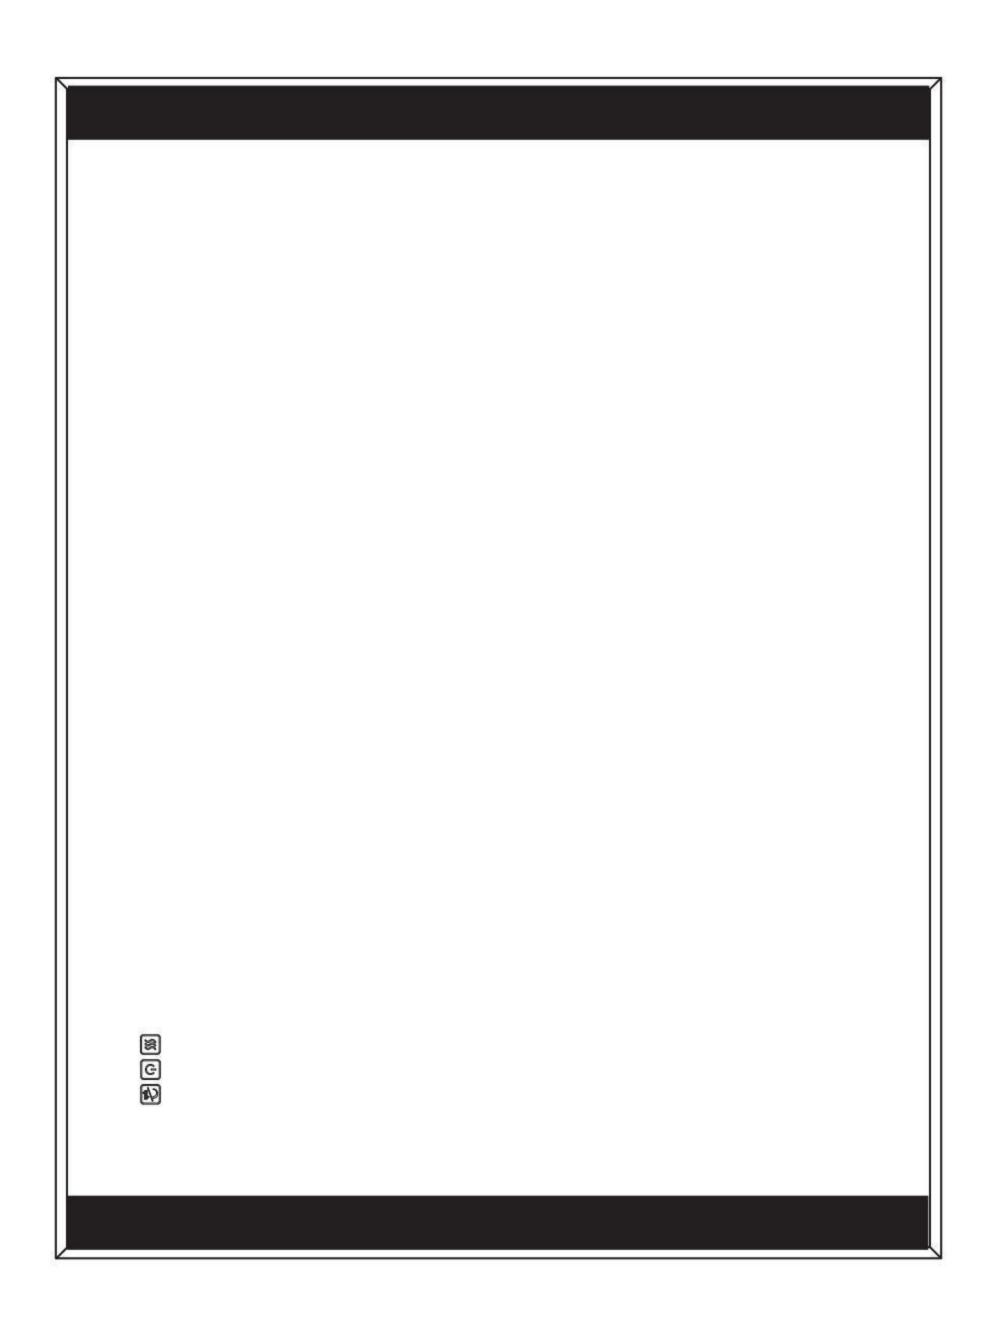



Mirror

## HARDWARE INCLUDED (not shown actual size)

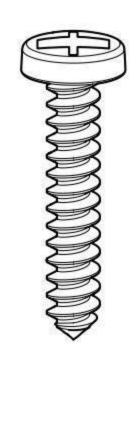

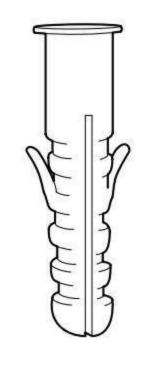



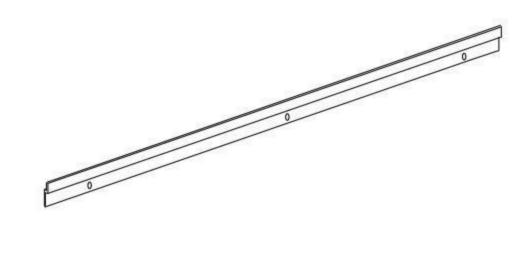

**SCREW** 

WALL PLUG

WIRE CONNECTOR

HANGING BAR




NOTE: Determine overall mirror dimensions before proceeding to installation.

\*All dimensions & specifications are approximate and subject to change without notice.

\*Accessories and parts may vary from the picture above. Depends on the product model and size.

## INSTALLATION

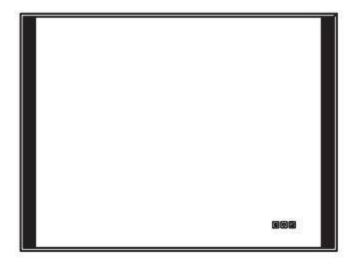

#### MEIRA-W18FM2836/3236/3636

Colors/Finishes::Matte Black(MB), Brushed Gold(BG),White(WT)

## LIGHTED FRAME MIRROR Lighting and Defogger

### **ELECTRIC CONNECTIONS**

#### ALL WIRING SHOULD BE DONE BY A QUALIFIED LICENCED ELECTRICIAN



WARNING: Shut off power before wiring the mirror.



**WARNING:** An Electrical option mirror must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.




**WARNING:** This mirror must be connected to a grounded, metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the mirror.




CAUTION: Requires 120 VAC 20 Amp GFI protected circuit.

## vertical hanging

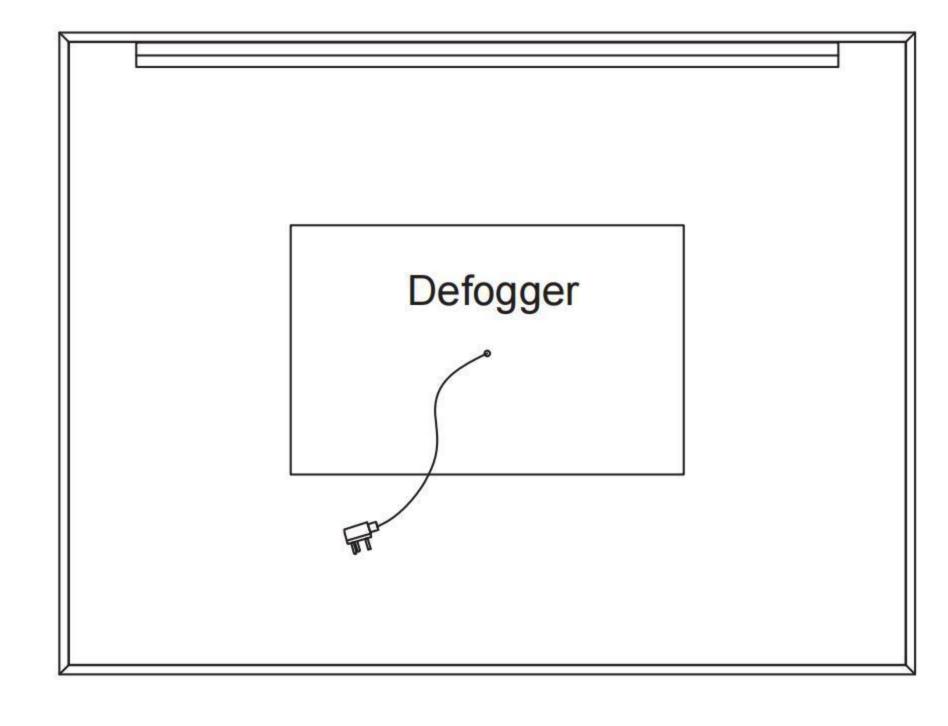

horizontal hanging

**Electric wiring:** Be sure to provide enough wire to make the proper and safe connection to the Field/Power.

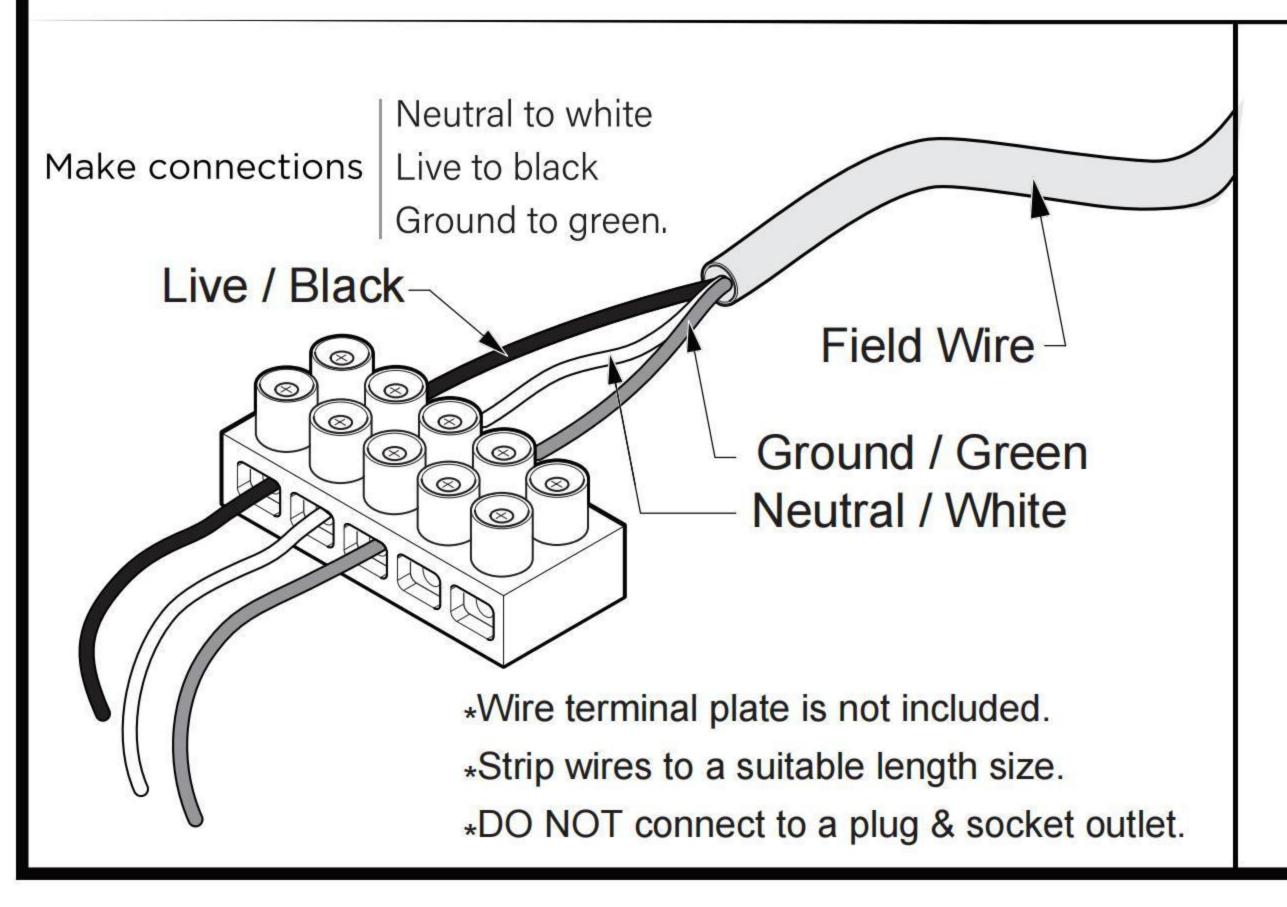

#### MIRROR FEATURES

- 5mm copper free silver mirror
- High quality LED Lighting
- CRI 90+, 3000-6000K CCT, IP44
- Color temperature and dimming
- Separate controlled defogger
- Vertical and horizontal mount options

## INSTALLATION INSTRUCTIONS


PLACEMENT
Select the desired

Select the desired position of the mirror. Level and mark the location. (vertical and horizontal mounting opntions)


 SUPPORT LOCATION

Measure the hanging bar holes and mark the drilling locations ensure marking are leveled.

A

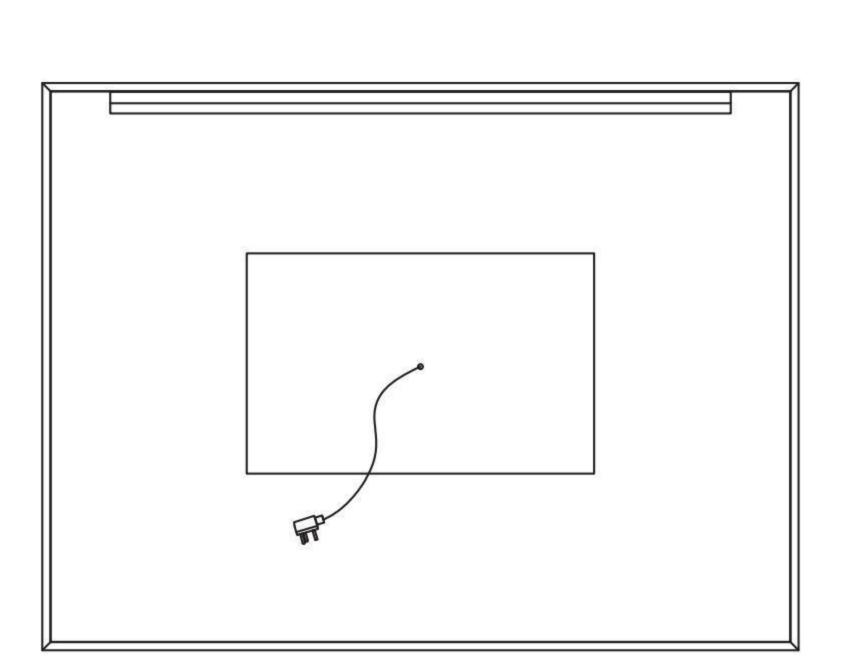

В

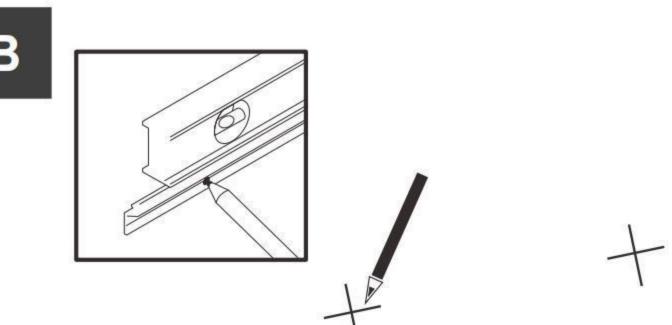


+


+

3 INSTALL SCREWS

Using a drill, make holes on solid wall, and fill with supplied plugs and screws into hanging bar holes tightly.

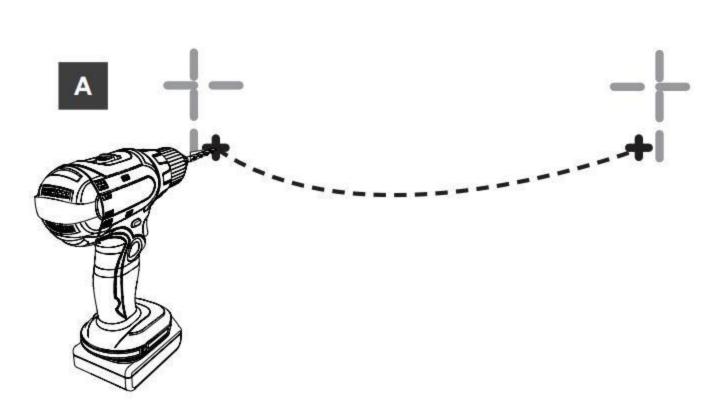


.

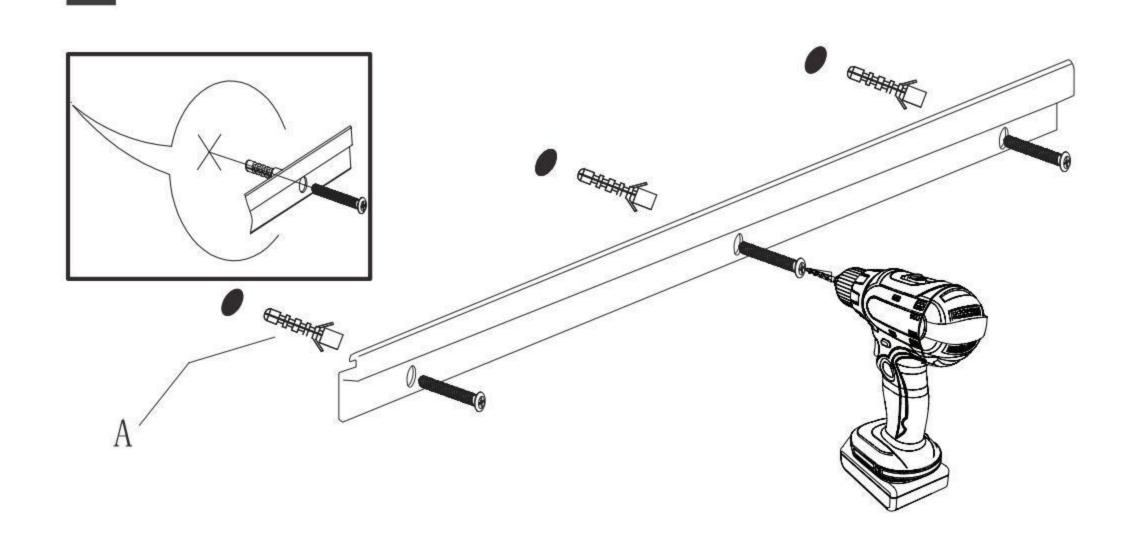

4 POWER OFF

Please turn off all the power before the mirror wires connection.

## Power Off

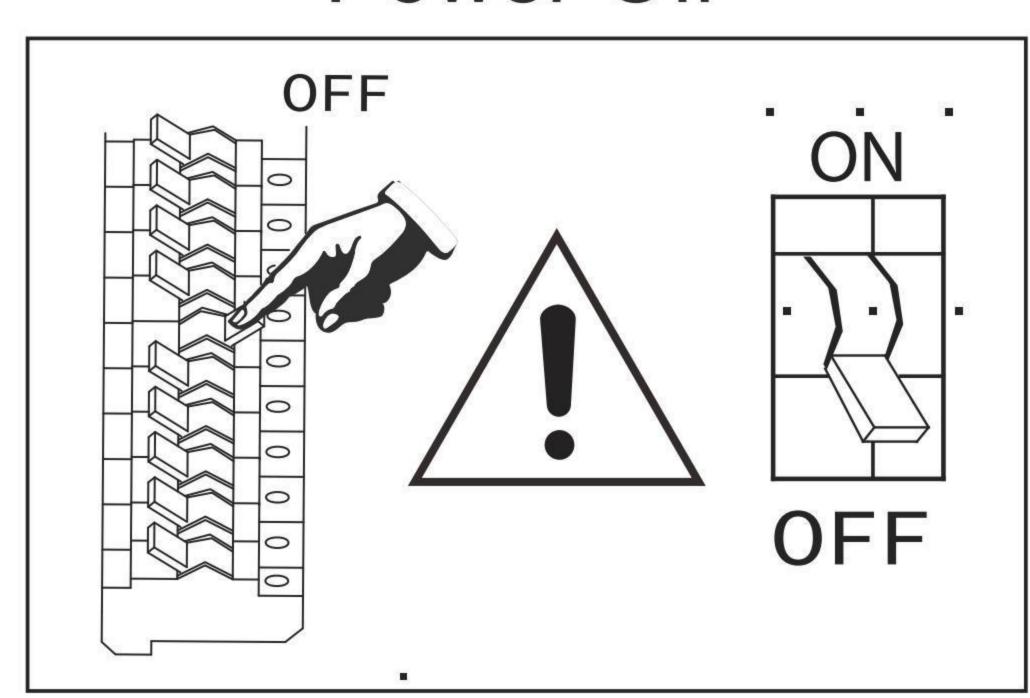


## INSTALLATION INSTRUCTIONS

5

#### CONNECTION

Plug into the socket, or cut off the plug then use the wire connector to connect the external power supply. (plug or hardwire connection options)

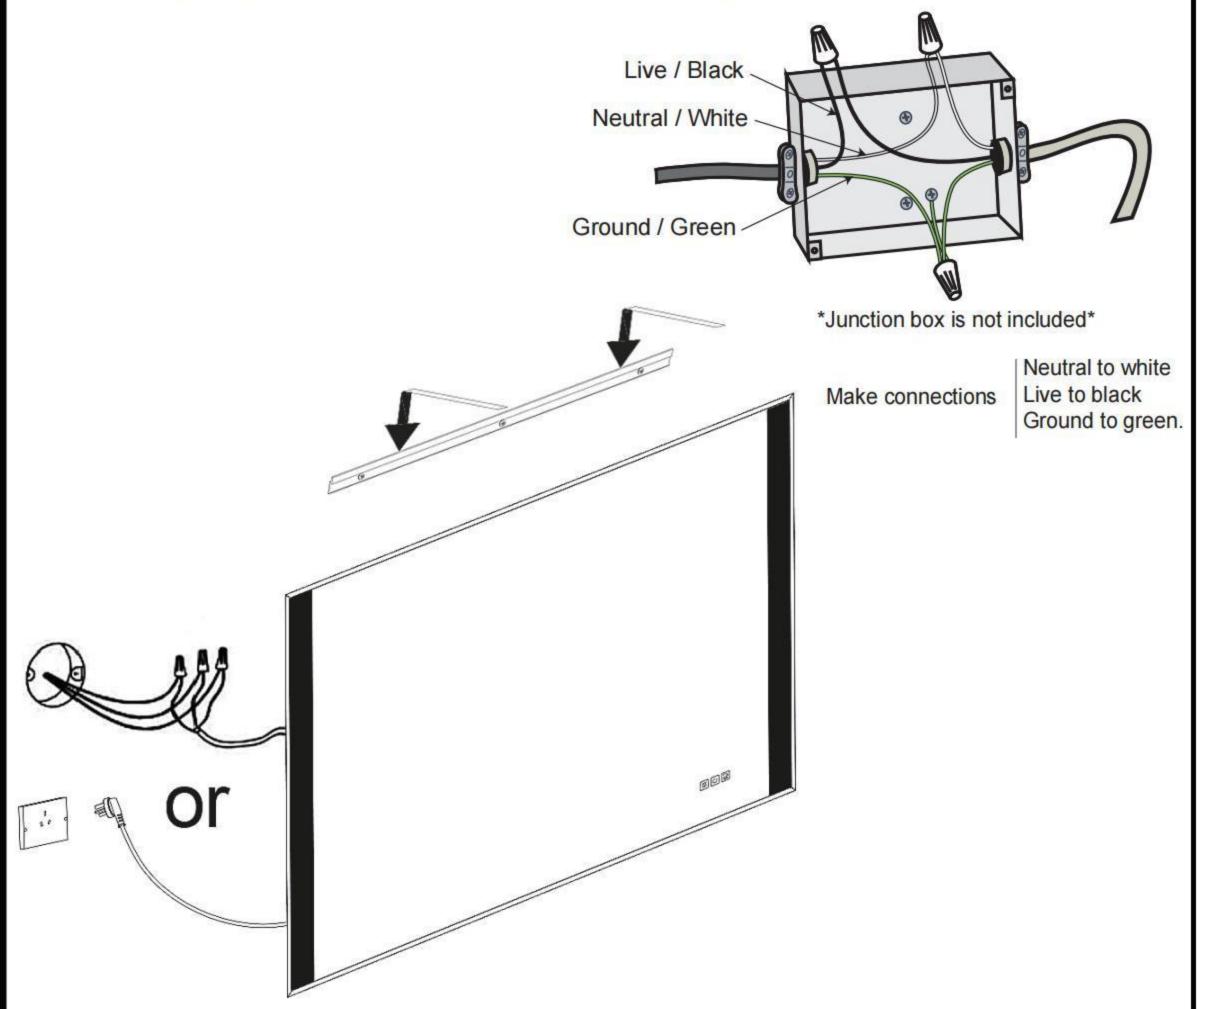


Warning: Strip wires to a suitable length.DO NOT connect the hardwire to a plug & socket outlet

6

Turn on the power

Hang up the mirror stable then turn on the power.

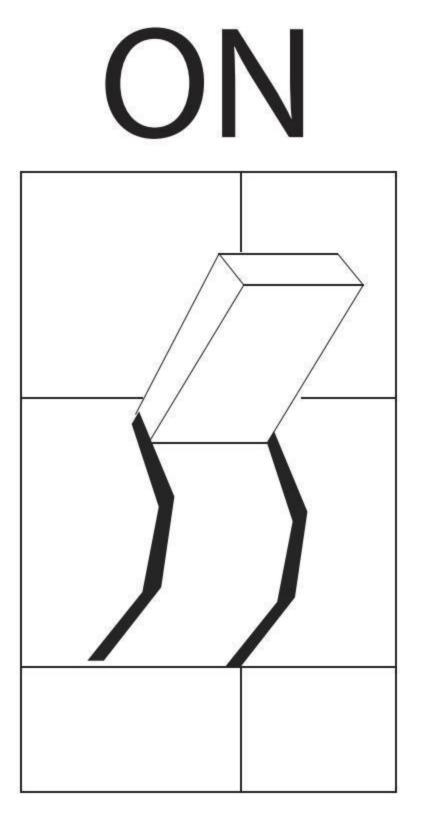


OFF


## TOUCH SWITCH SETTING UP


#### **How to use Touch Switch:**

## **Left Touch Sensor**



Short touch to turn ON/OFF the defogger.










### Middle Touch Sensor



Short touch to ON/OFF lighting.

## **Right Touch Sensor**



Short touch to get the light temperature 6000K, 4000K and 3000K. Long touch to adjust the light brightness from 10%-100%. Release the button when the light reaches the desired setting.

\*Suggestion: The mirror is equipped with memory function to preserve the previous brightness/color settings.

Turn off the mirror power supply if you don't use it for a long time.


### **WARNINGS:**

- 1. Please do not use if you found the mirror have been broken.
- 2. Never put any sharp or heavy material on the mirror surface, other wise the glass mirror will be broken and body injury accidents may occur.
- 3. Turn off the power switch in storm lightning weather to avoid electric parts damage.

## **Use and Maintenance:**


## **CAUTION:**

#### • USE

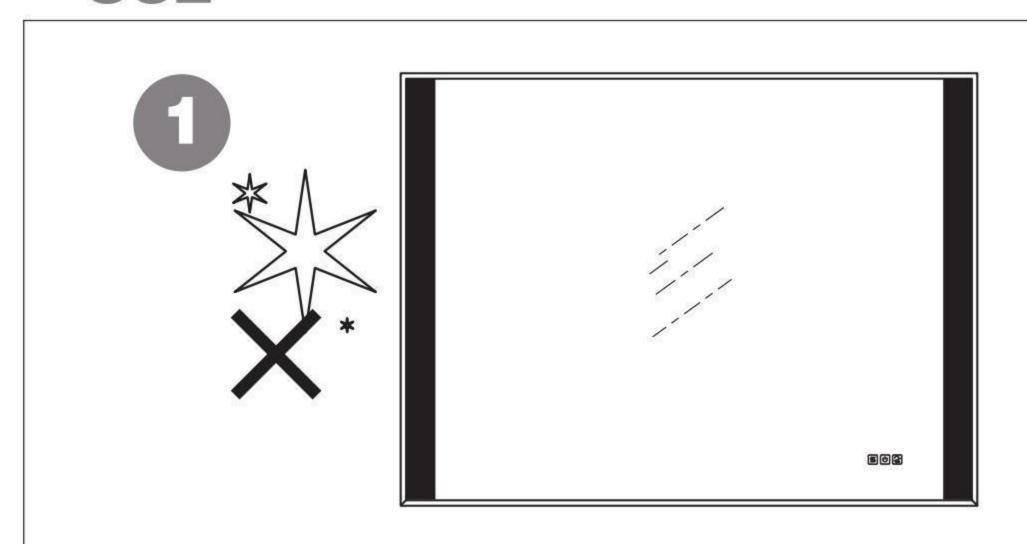


 To avoid damage, do NOT knock the mirror with any hard objects;

#### • CLEANING

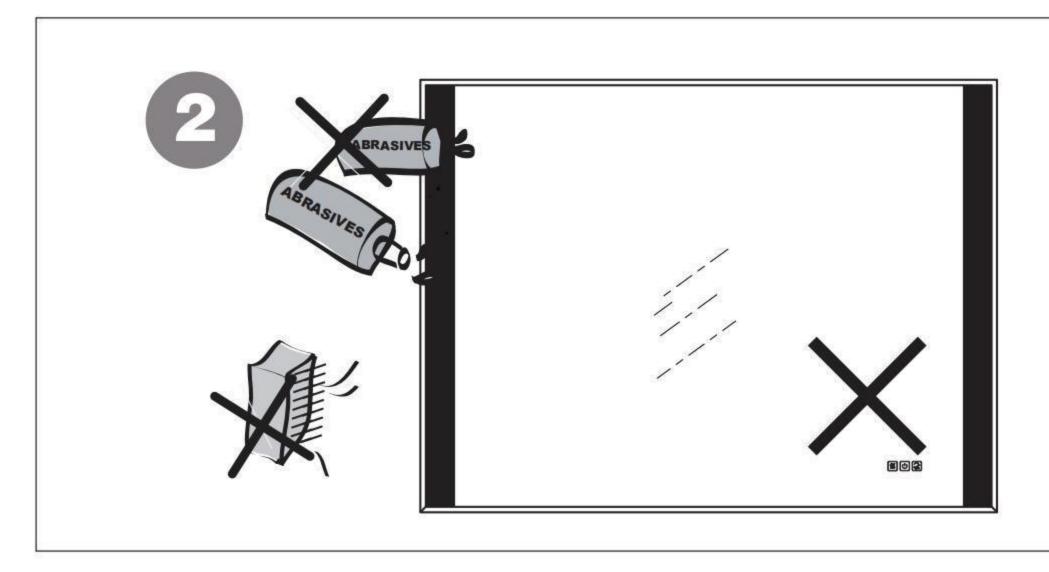

Do NOT clean the mirror with caustic cleaner. Do NOT wipe the mirror with Bristle brush;

#### • MAINTENANCE

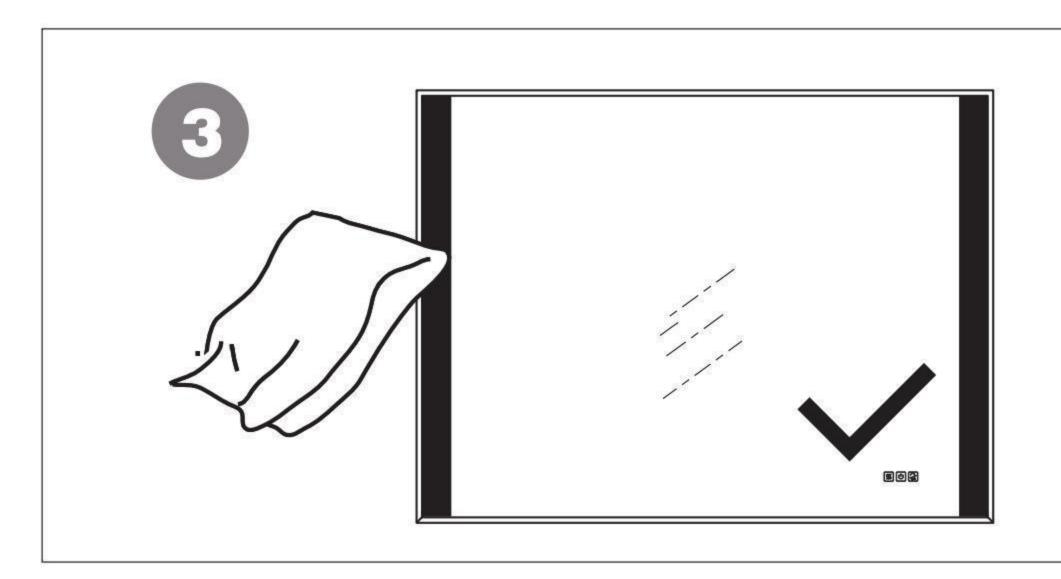

3. For daily maintenance, please use soft cloth and mild cleaner to clean the mirror.