




CAUTION

**READ INSTRUCTIONS CAREFULLY FOR
SAFE INSTALLATION AND FAN OPERATION**

Unpack your fan and check the contents. You should have followings:

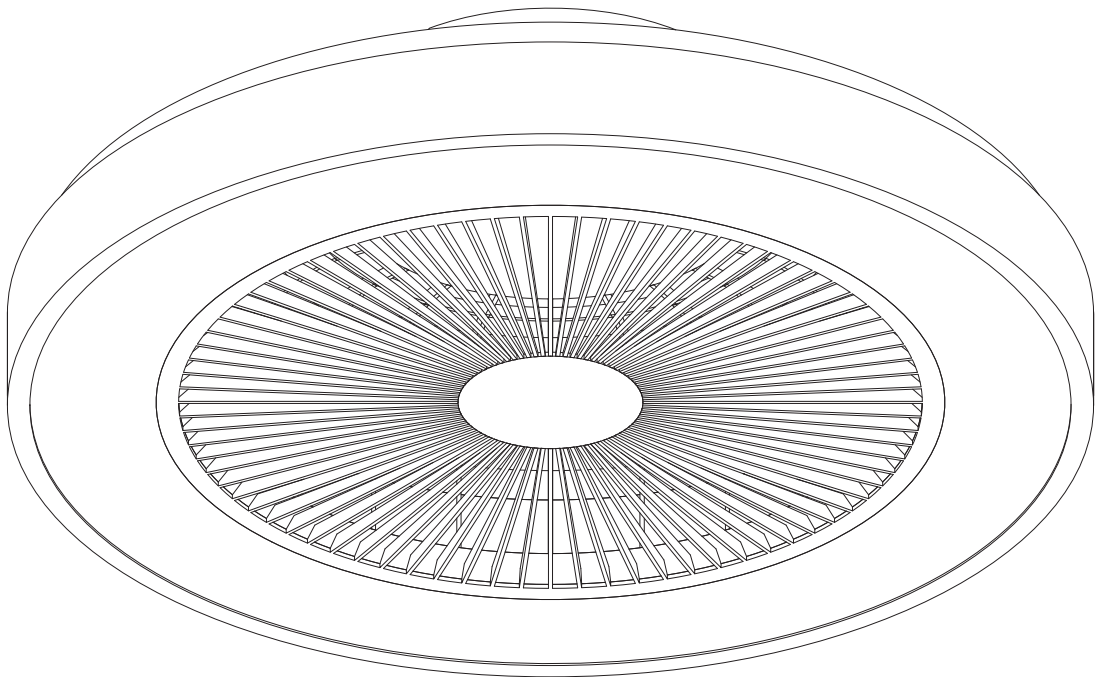

Remote Controller x1 ①



Flat Washers x2 ②



Mounting Screws for Outlet Box x2 ③




Wire Connectors x3 ④

⑤ Wood Screws x4



⑥ Mounting Bracket x1




Locking Screws x4 ⑧

⑦ Wood Screws x4



⑨ Fan Motor x1

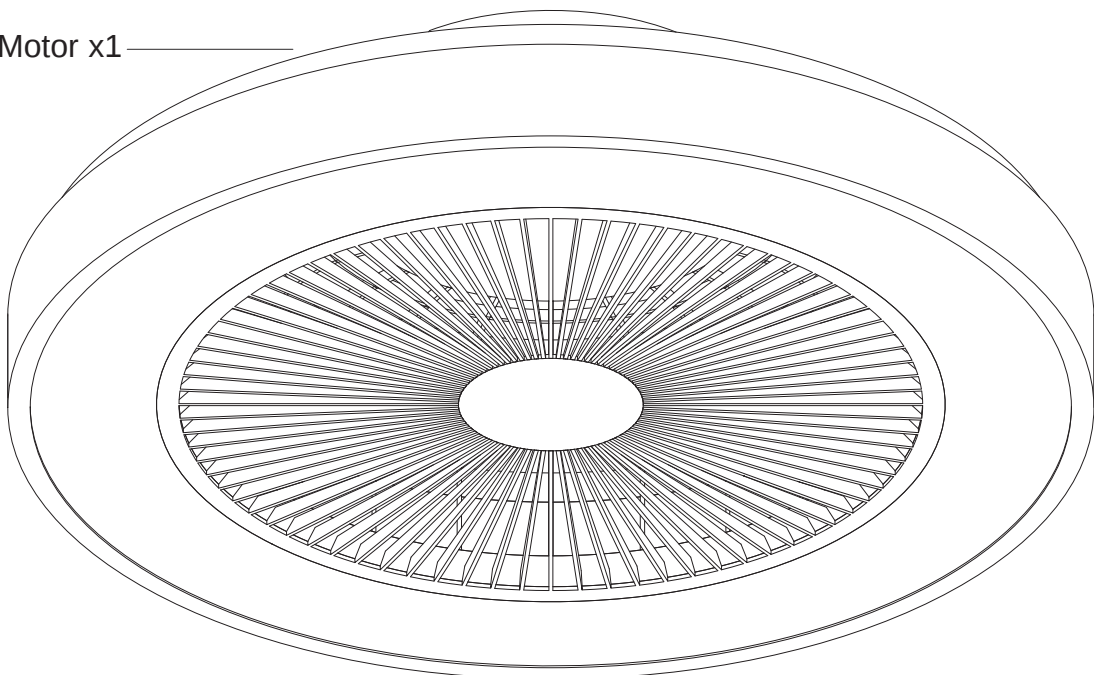

SAFTY RULES

1. To reduce the risk of electric shock, turn off the electricity to the fan at the main fuse box or circuit panel before beginning.
2. All wiring must be in accordance with the local electrical codes or National Electrical Code. Electrical installation should be performed by a qualified licensed electrician.
3. To avoid personal injury, the use of gloves may be necessary while handling fan parts with sharp edges.
4. Make sure the installation site you choose allows clear space for the blades to rotate and at least seven 7 feet (2.13 meters) of clearance between the floor and the fan blade tips. The fan should be mounted so that the tips of the blades are at least thirty 18 inches (45.72 centimeters) from walls or other upright structures.
5. **WARNING:** To reduce the risk of fire, electric shock, or personal injury, mount fan only to an outlet box marked acceptable for fan support and use mounting screws provided with the outlet box. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and may need to be replaced. Consult a qualified electrician if in doubt.
6. The outlet box and ceiling support structure must be securely mounted and capable of supporting at least 45 KGs.
7. To avoid personal injury or damage to the fan and other items, be cautious when working around or cleaning the fan.
8. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened cloth will be suitable for most cleaning.
9. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
10. Electrical diagrams are for reference only.
11. The fan is suitable for indoor use only.


TOOLS REQUIRED



Step 1: Install the Mounting Bracket

Secure the Mounting Bracket to your ceiling using the provided Wood Screws.

WARNING: Ensure the mounting surface is structurally sound and capable of supporting the full weight of the fan and any associated hardware.

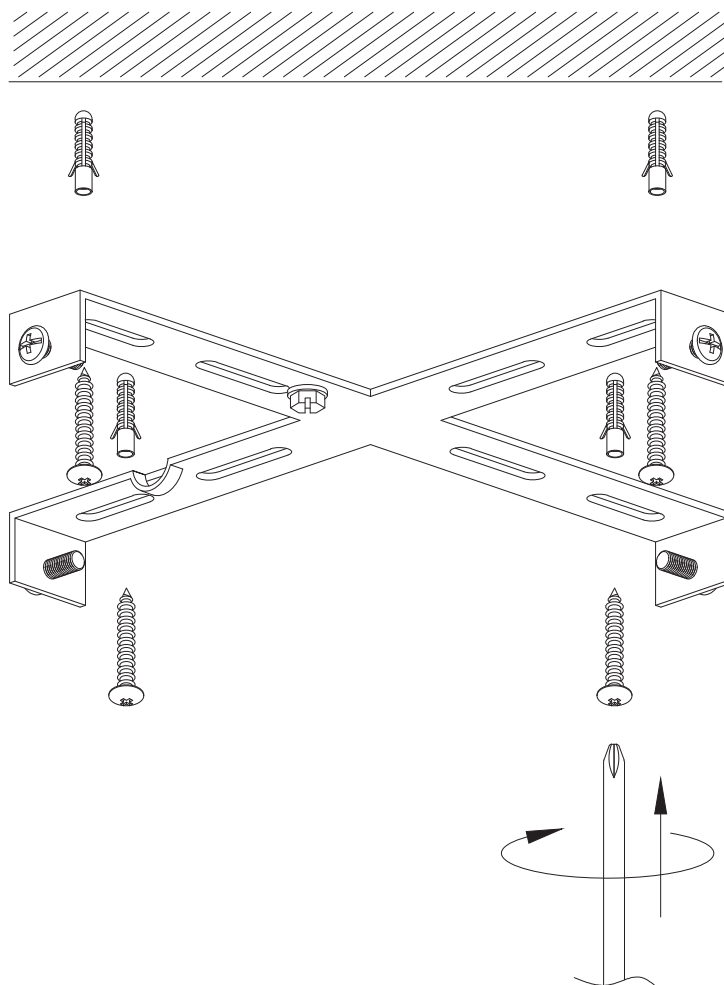


Step 2: Hang the Fan Motor

Hang the hook on the Fan Motor onto the Mounting Bracket to hold the motor securely in place during installation.

Step 3: Make Electrical Connections


As shown in the diagram, connect the wires from the Fan Motor to the corresponding household wires using the provided Wire Connectors (Wire Nuts).

WARNING: Before making any wire connections, ensure the main power supply is turned OFF at the circuit breaker to prevent electric shock or serious injury

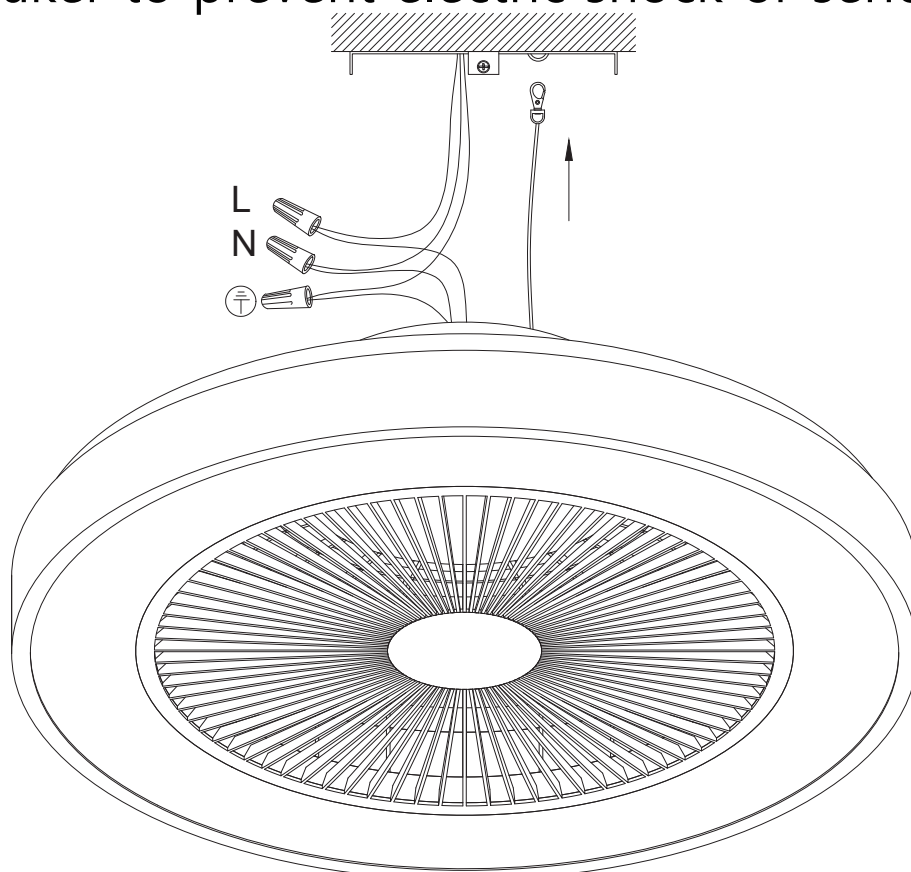

Step 4: Secure the Fan Motor

Align the "L-shaped " keyhole slots on the Fan Motor with the mounting tabs on the Mounting Bracket. Slide the motor into place to lock it onto the bracket. Then, fasten the Fan Motor securely to the Mounting Bracket using the included Locking Screws.

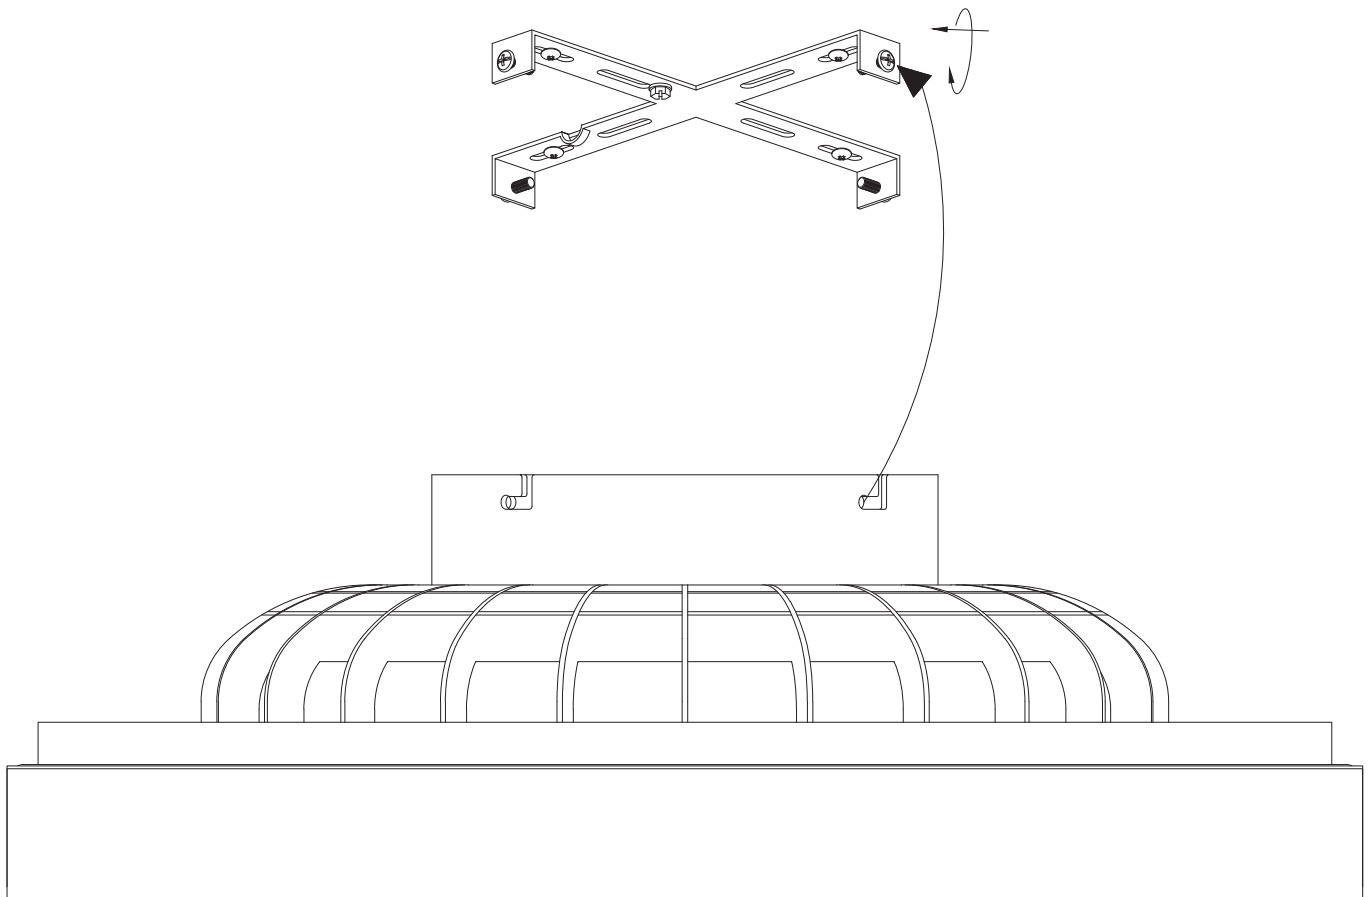



CCT Dimmable Light Operation

If your ceiling fan is CCT dimmable light, it has 3 light tones, please turn off the light then turn it on again, the light tone will change.

TROUBLESHOOTING GUIDE

If you have difficulty operating your new ceiling fan, it may be the result of incorrect assembly, installation, or wiring. In some cases, these installation errors may be mistaken for defects. If you experience any faults, please check this Trouble Shooting guide. If a problem cannot be remedied, please consult with your authorized electrician and please feel free to contact us: [Email:Aftersales07@hotmail.com](mailto:Aftersales07@hotmail.com)

*** Please contact us and we will help you check and get the problem resolved, you don't have to uninstall and send it back. ***

Before:

1. This is LED ceiling fan, **DO NOT** install any dimmer switch for this.
2. Install the Remote **OR** Wall Switch, **DO NOT** install both of them.
3. Check circuit fuses or breakers and make sure the battery is installed correctly.
4. Check line wire connections to the fan and switch wire connections in the switch housing.

CAUTION: Make sure main power is off.

Problem: Light does not work

Solution:

1. Check to see that the wire connections in the switch housing are connected.
2. Make wiring connections from the house to the LED light directly (don't connect the remote and the fan) to determine it's the issue of the LED light or not.

Problem: Fan will not start.

Solution:

1. Check line wire connections to the fan and switch wire connections in the switch housing. **CAUTION: Make sure main power is off.**
2. Make the Fan wiring connections Without the Remote & transmitter and the light, to determine it's the issue of the fan body or not.
 - a) Please don't wire the light at the bottom
 - b) Connect the Ceiling Fan Neutral Wire (White) to the Neutral Wire (White) coming through the ceiling
 - c) Connect the Ceiling Fan Live Wire (Black) to the Live wire (Black or Colored) coming through the ceiling

Then turn on the main power, check the fan works separately or not.