



---

## Self-Watering Mobile Elevated Garden

### Installation Guide

---

### Thank You!

You're only a few steps away from your perfect vegetable garden or elevated planter. We hope you enjoy!

### Before You Start

Please read the instructions carefully to familiarize yourself with every detail and step involved. Keep this manual for future reference. Find a suitable space to assemble your new Elevated Garden Bed.

You need at least 37" x 19" (94 x 49 cm) for the finished product. A flat and firm area (like a garage floor or flat yard space) is perfect! The only tools you may need are a rubber mallet and a scissor.

### Important Notes

Small parts are included; we advise you to keep them away from children and pets.

We also suggest having another person help you assemble. Maximum Load capacity: approximately 3.2 cu. ft. of soil

★ **Subscribe at [www.everbloom-garden.com](http://www.everbloom-garden.com) for extra savings and upgrading information!**

Model# S333618W/B/G  
Dimensions 36" L x 18" W x 36" H



\*Model# S333618W: brown  
\*Model# S333618WB: blue  
\*Model# S333618WG: grey

**Everbloom-Garden.com**

Questions or Comments?


Email us at [service@everbloom-garden.com](mailto:service@everbloom-garden.com)

Copyright © 2022 Dynaforge Trading LLC.


# Parts List 1

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Left Corner  
Post  
X 2




Right Corner  
Post  
X 2



Long  
Board  
X 2




Long Support  
Board  
X 2




Short  
Board A  
X 2




Short  
Board B  
X 2



Post Cap  
X 4



Caster Wheel  
X 4




Bolt  
X 4



Nut  
X 4



Nut Driver  
X 1




Hex Key  
X 1




# Parts List 2

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Reservoir  
Top Cover  
X 3

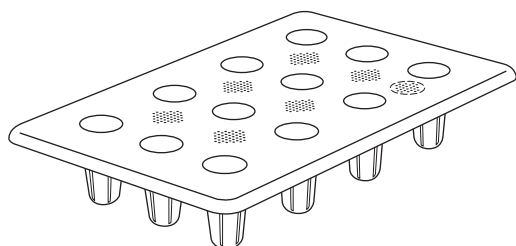

Reservoir  
Bottom Tray with  
End Caps  
X 3

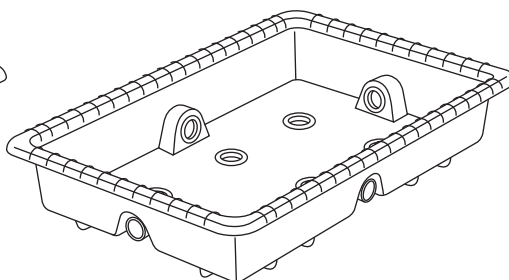

Black Silicone  
Connecting Tube  
X 2



+ 1pc  
replacement

Fill Tube  
X 2




Water Level  
Indicator  
X 1



+ 1pc  
replacement

Water Level  
Indicator Cap  
X 1



+ 1pc  
indicating tube  
replacement

Fill Tube  
Lid  
X 1



+ 1pc  
replacement

Black  
Tape  
X 1




# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Two depths are available by changing the position of reservoir, as shown in Image 1. You can choose according to different needs first.

IMAGE 1

Depth 7.25", 9.75"

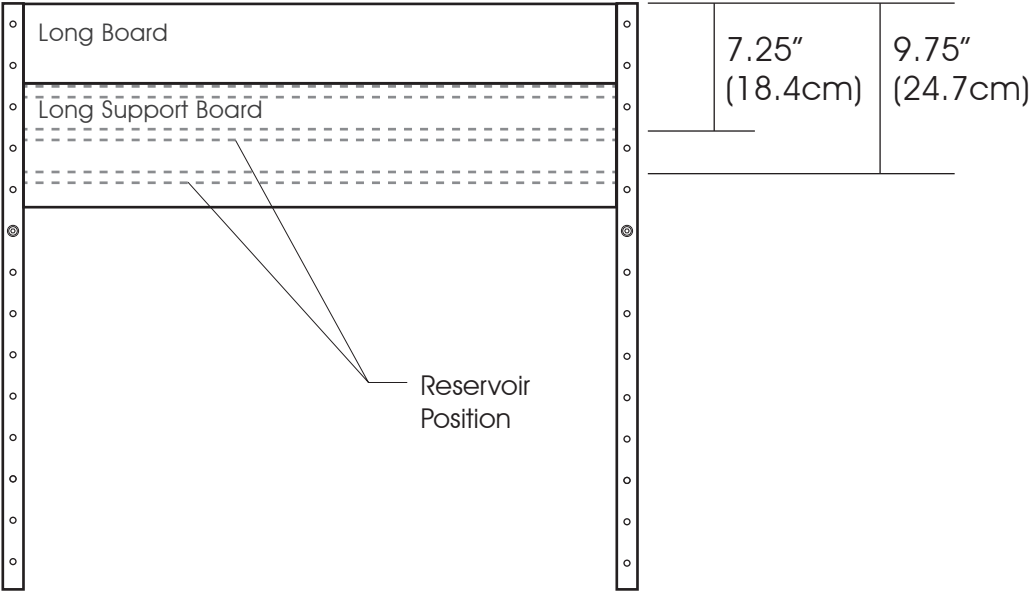



# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

*For planting depths of 7.25", please follow steps below.*

*For planting depths of 9.75", the assembly method is similar, just pay attention to the position of reservoir, please refer to page 4.*

Start by making sure each corner post is oriented correctly, as shown in Image 2. Slide one short board A into the corner brackets from above.

Note: The short boards need to be placed in the inward "U" shape of the brackets, as shown in Image 3.

IMAGE 2


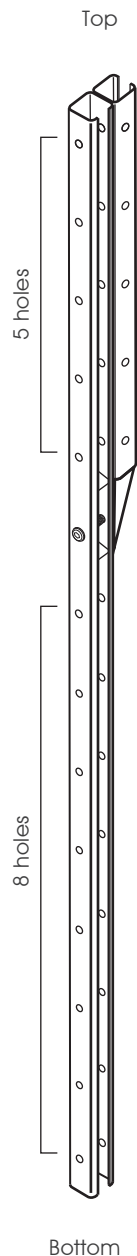


IMAGE 3

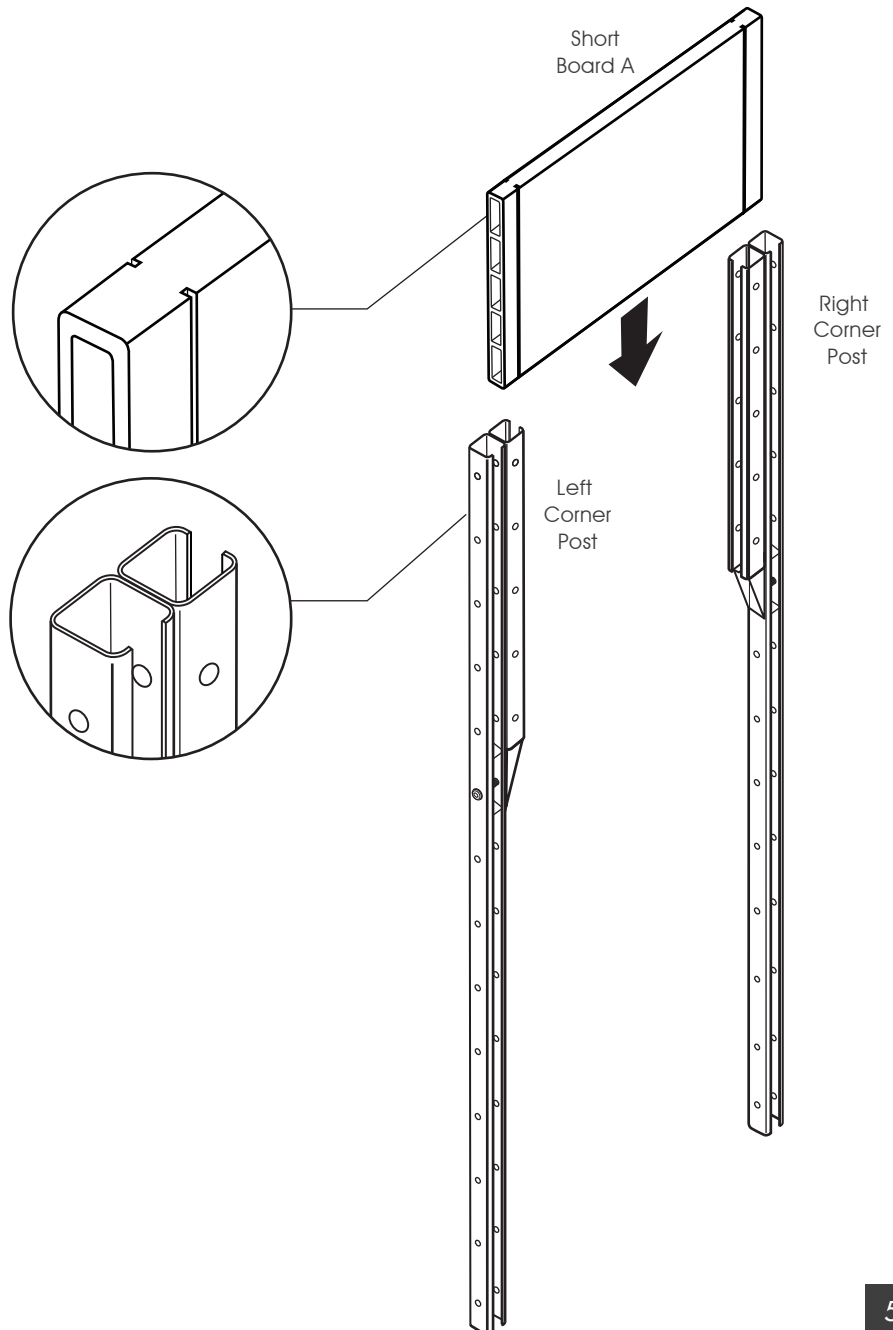


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

---

Slide another short board A into the other two corner brackets from above, as shown in Image 4.

IMAGE 4

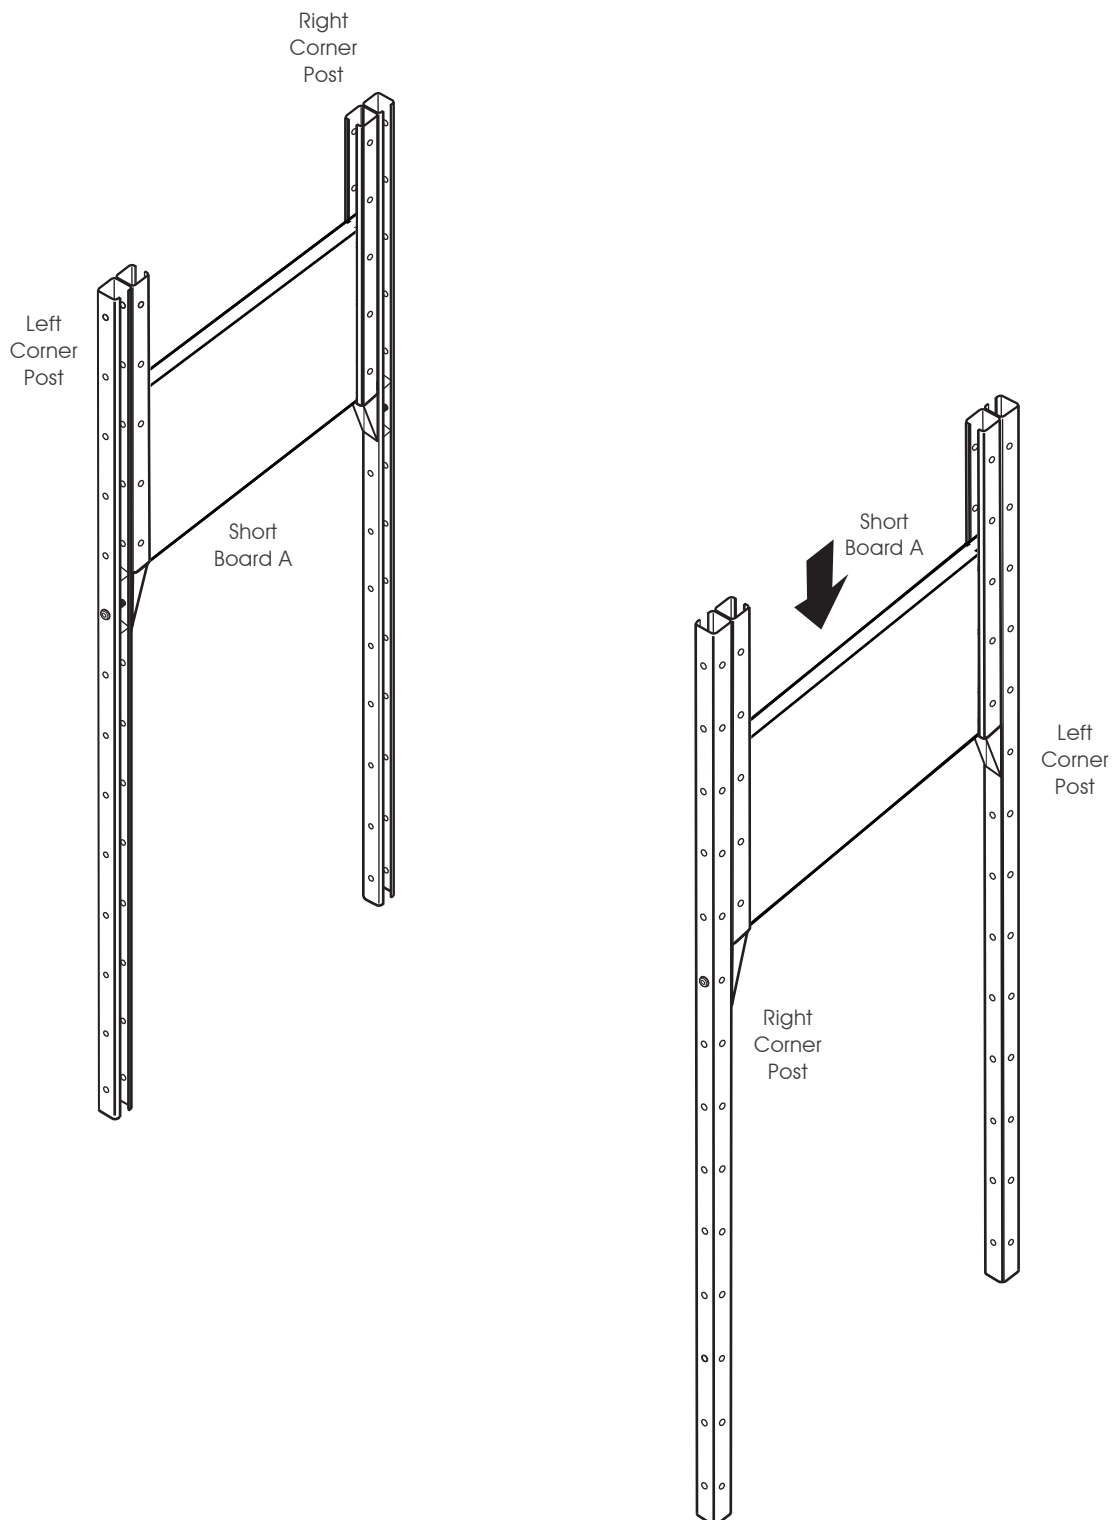


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

With the help of another person holding the 2 assembled parts, slide the 2 long supporting boards into the brackets from above. Make sure that one support board goes straight to the bottom, while the other one stays in the middle of the way (don't push to the bottom), with the top edge between the 1st and 2nd holes of the post, as shown in Image 5.

IMAGE 5

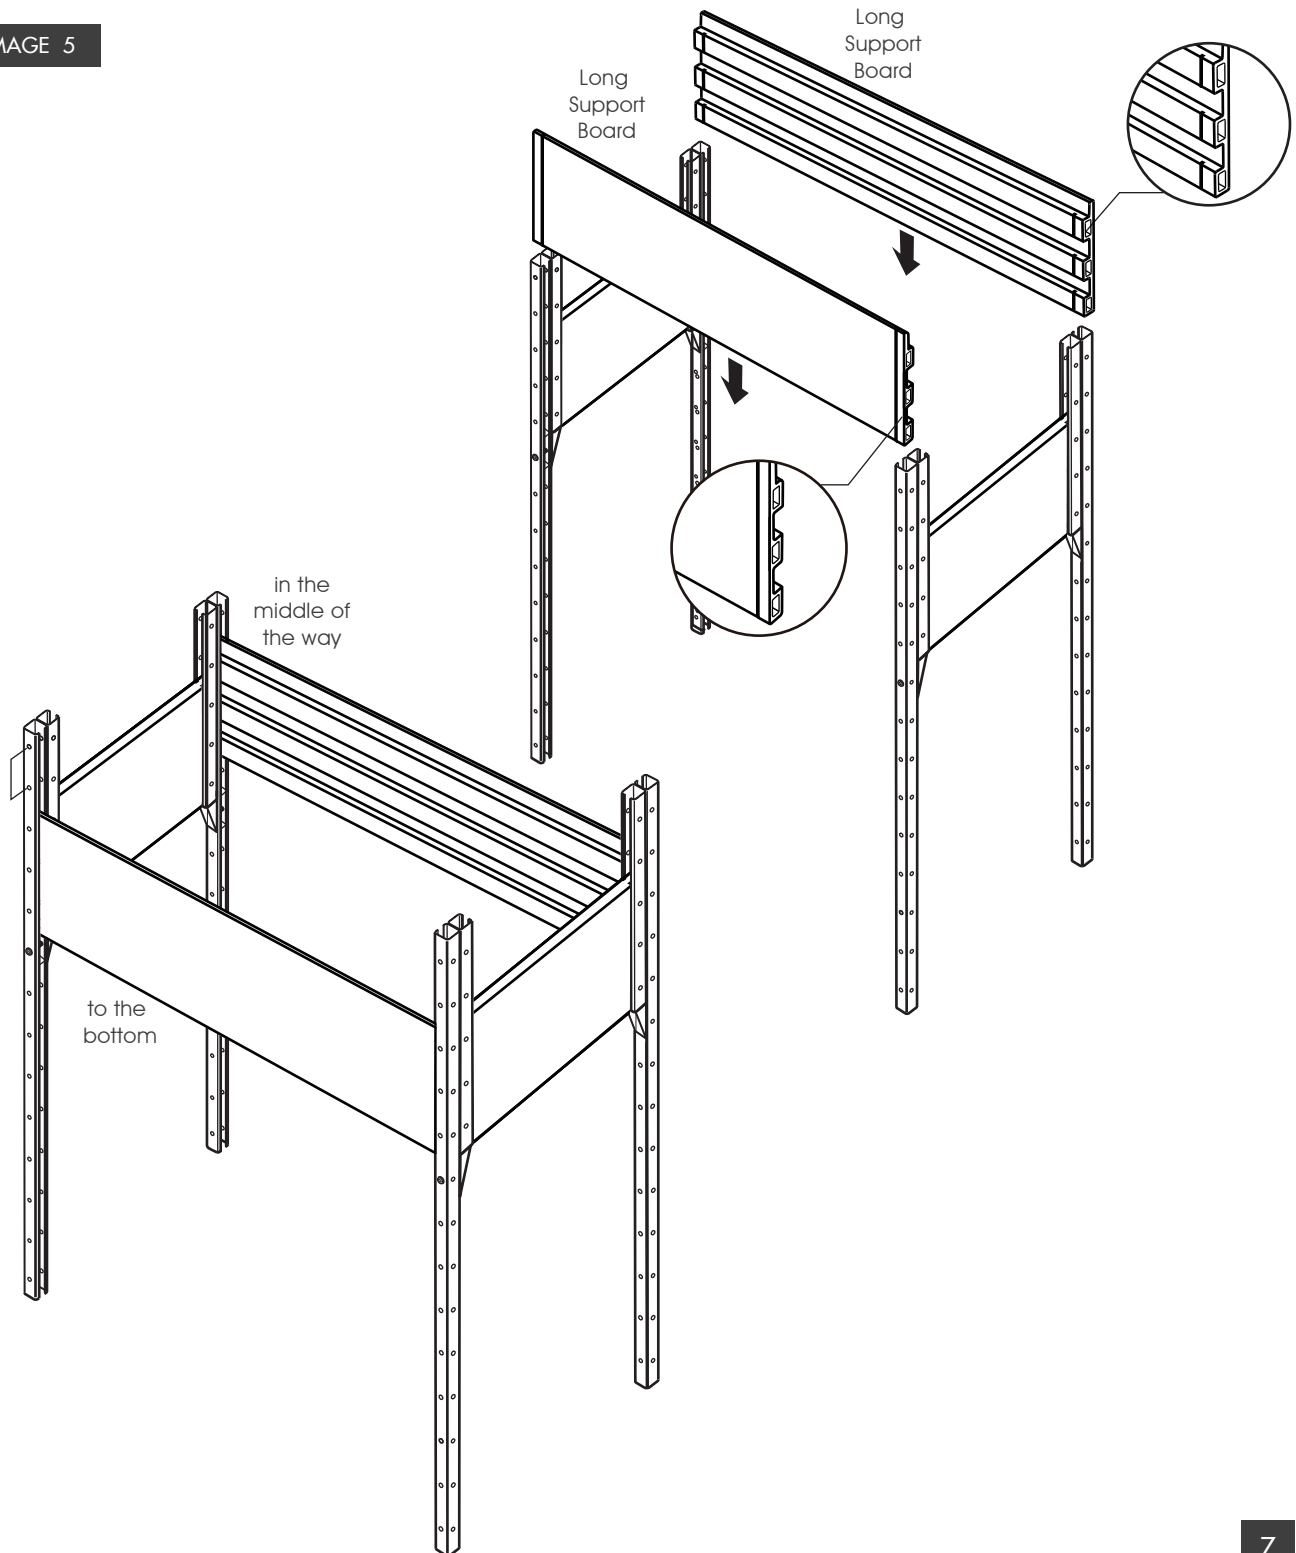

# Assembly

## Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Take off the 4 end caps from reservoir bottom trays, as shown in Image 6. Flip over the bottom trays, and connect them with black silicone connecting tube tightly, as shown in Image 7.

IMAGE 6


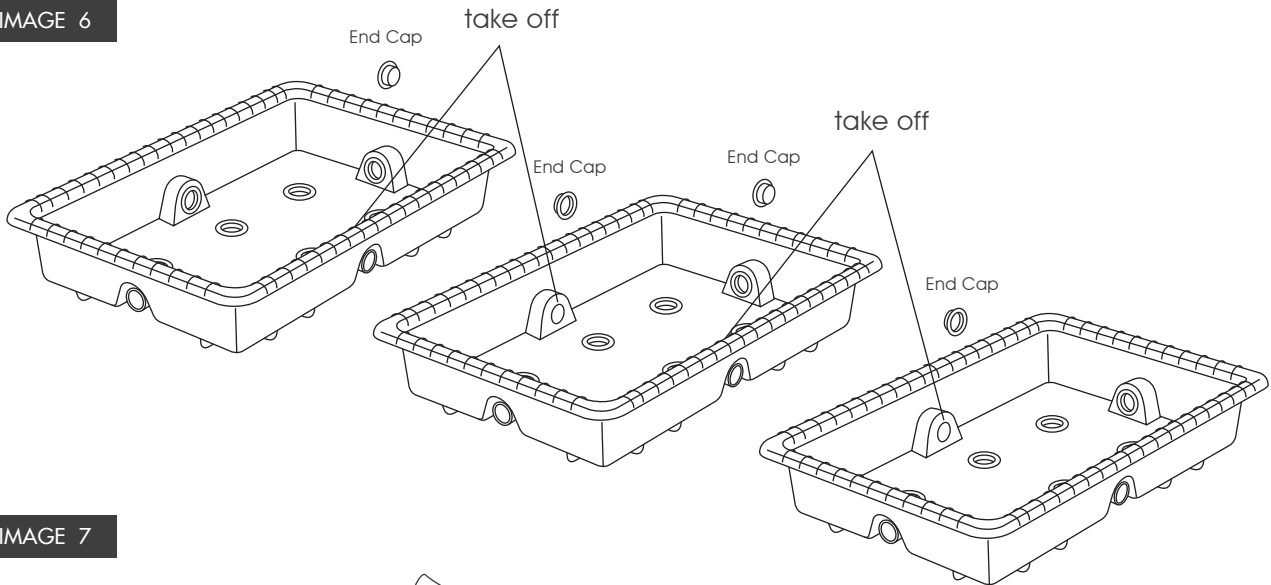


IMAGE 7

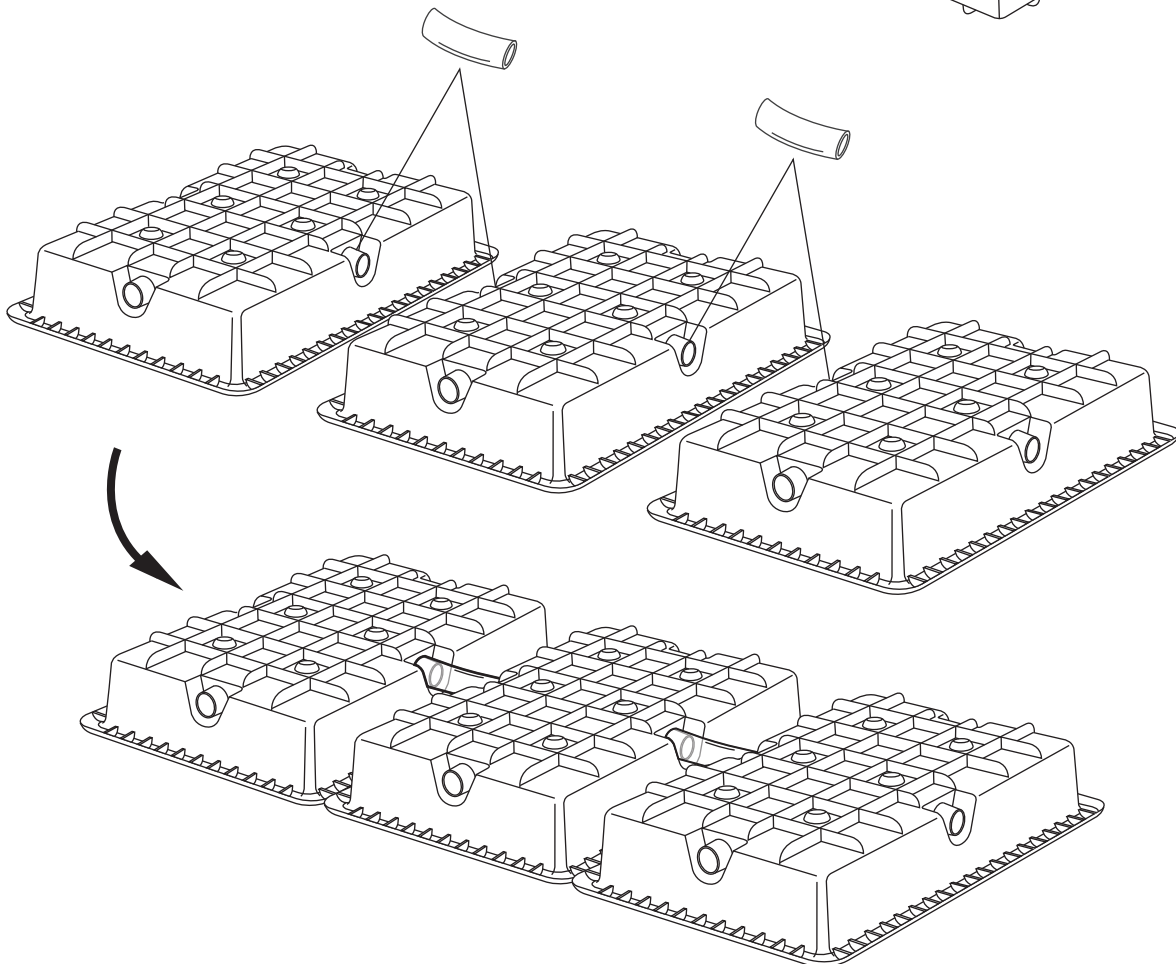


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Flip over the connected bottom trays and put them on lower slots of long support boards. Make sure the 2 ends of these bottom trays go into the lower slots and rest in them with enough contact as shown in Image 8. Adjust the height of the higher long support board slightly to hold these bottom boards if necessary.

IMAGE 8

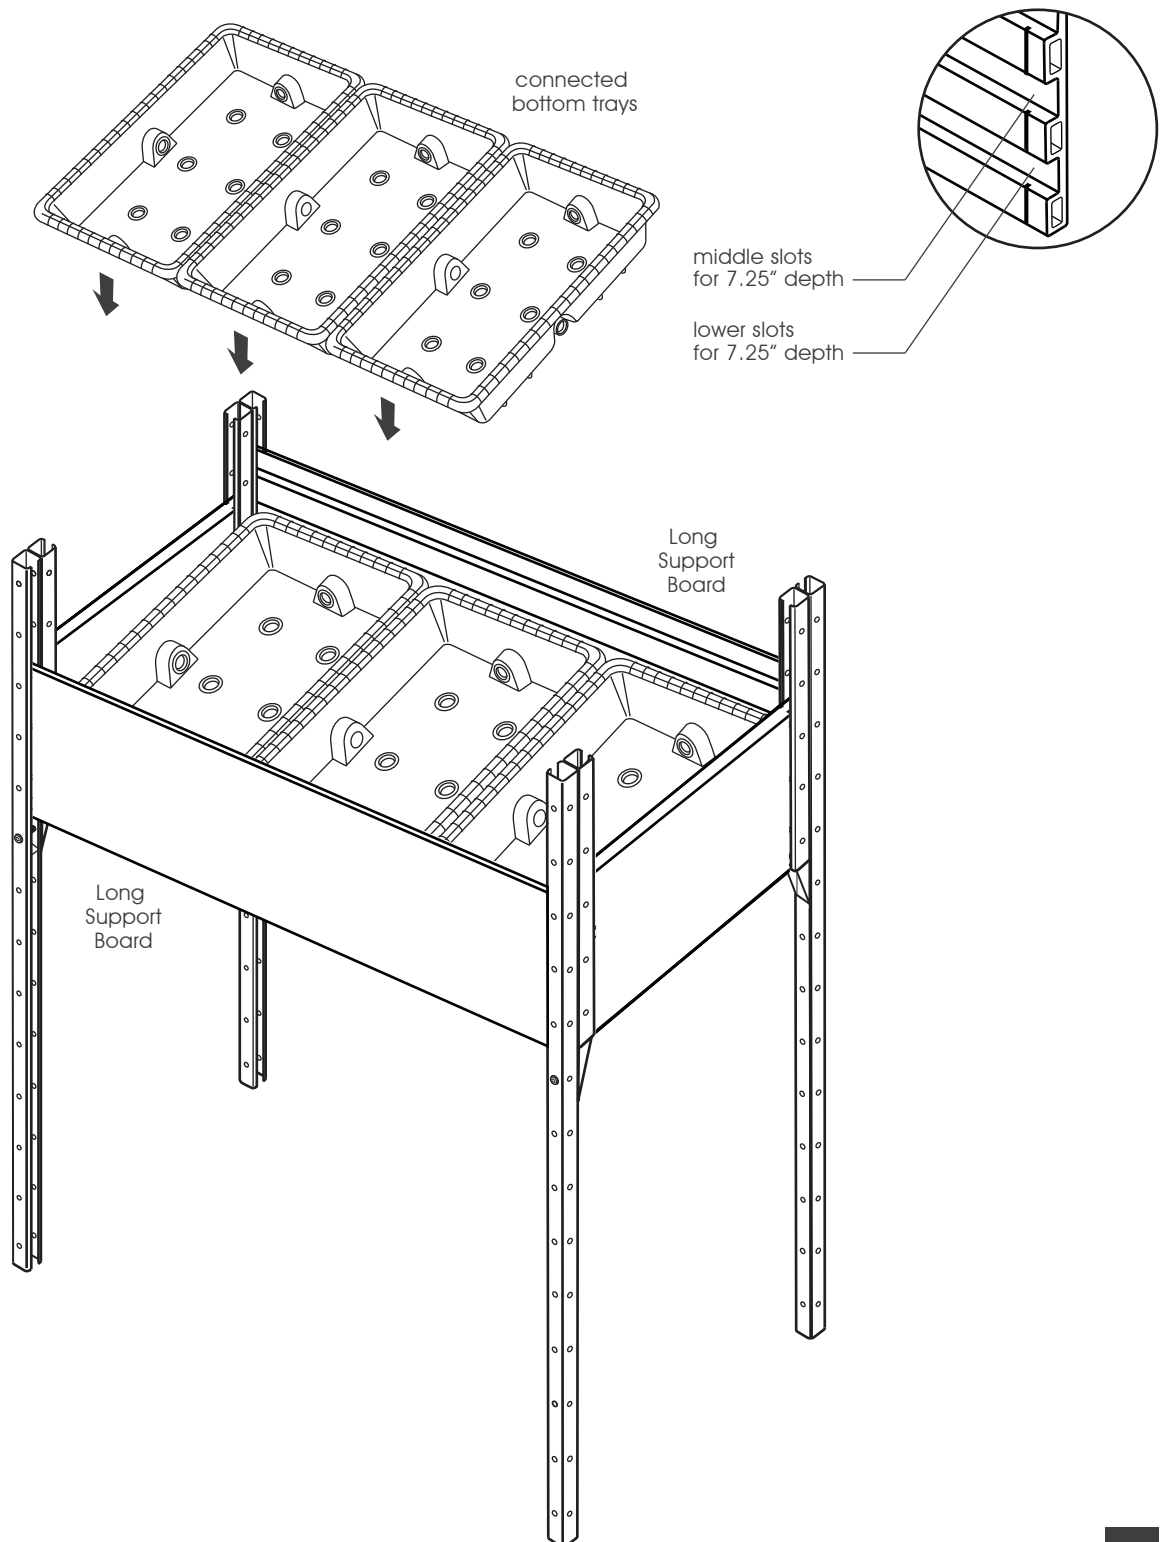

# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Punch down the perforated round panel on the top covers on both sides, as shown in Image 9. Then, put the top covers on the bottom trays, as shown in Image 10.

Note: Use a utility knife to cut off the perforated round panel if it's hard to punch down.

IMAGE 9


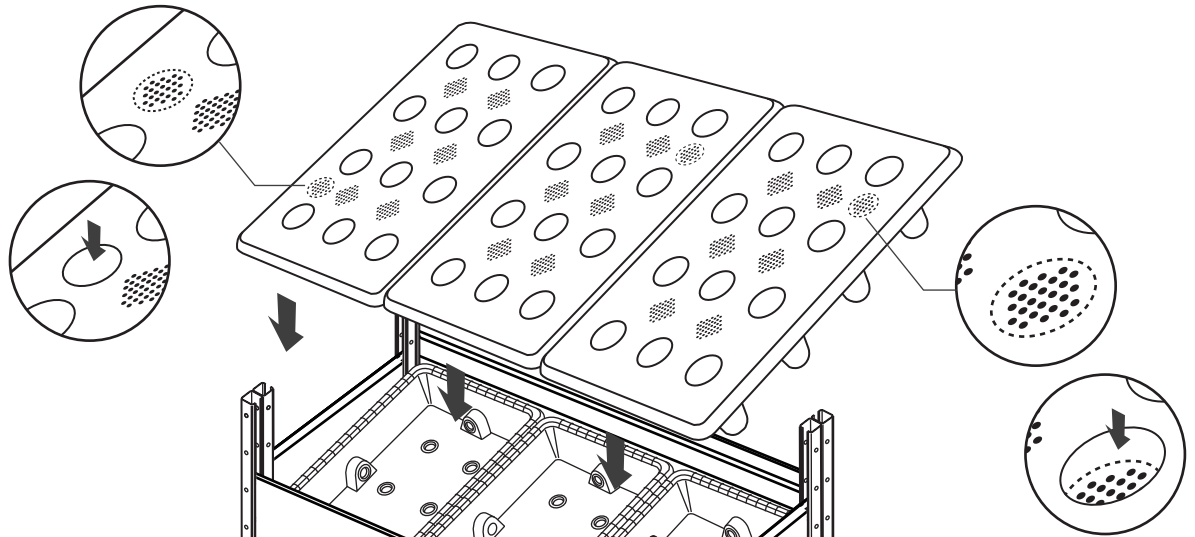


IMAGE 10

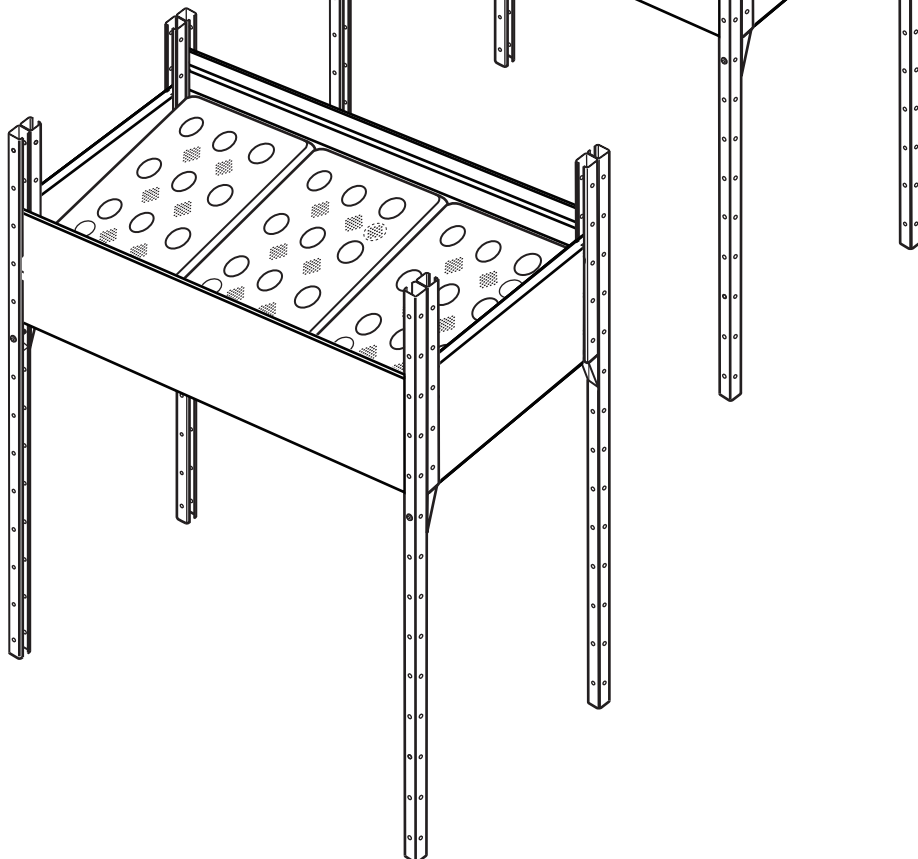


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

---

Push down the higher long support board to the bottom, as shown in Image 11.

IMAGE 11

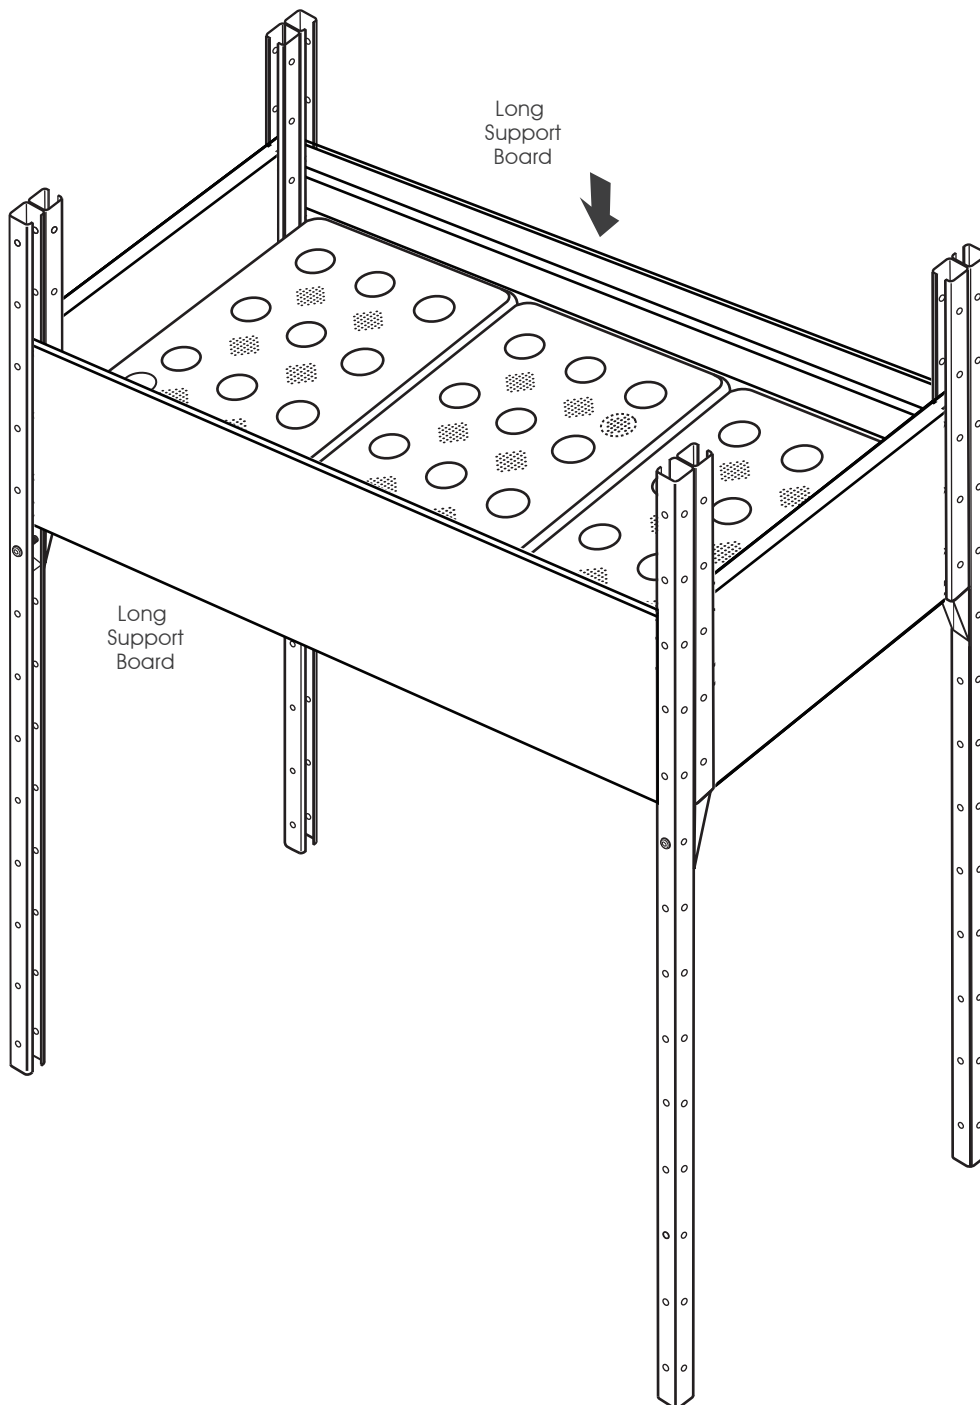


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Slide the remaining boards into place, as shown in Image 12.

**Note:** If you want to add trellis kit onto this bed, please assemble the extension connectors **before** this step, to avoid disassembling the boards later.

IMAGE 12

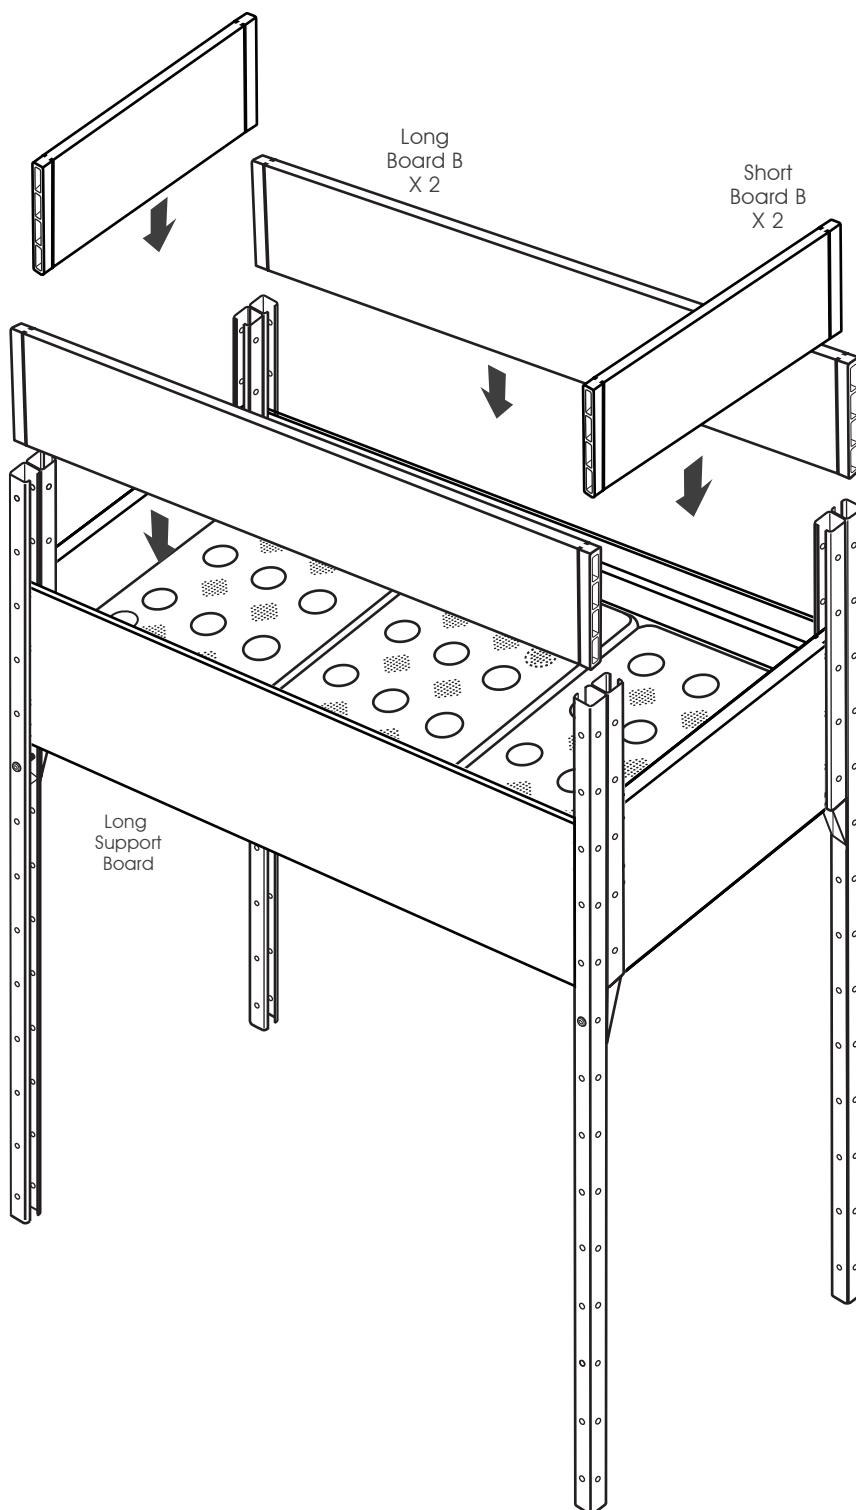




# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Carefully flip over the planter so that it lays flat with the long support boards pointing towards the sky. Insert caster wheels into corner brackets, as shown in Image 13 and Image 14.

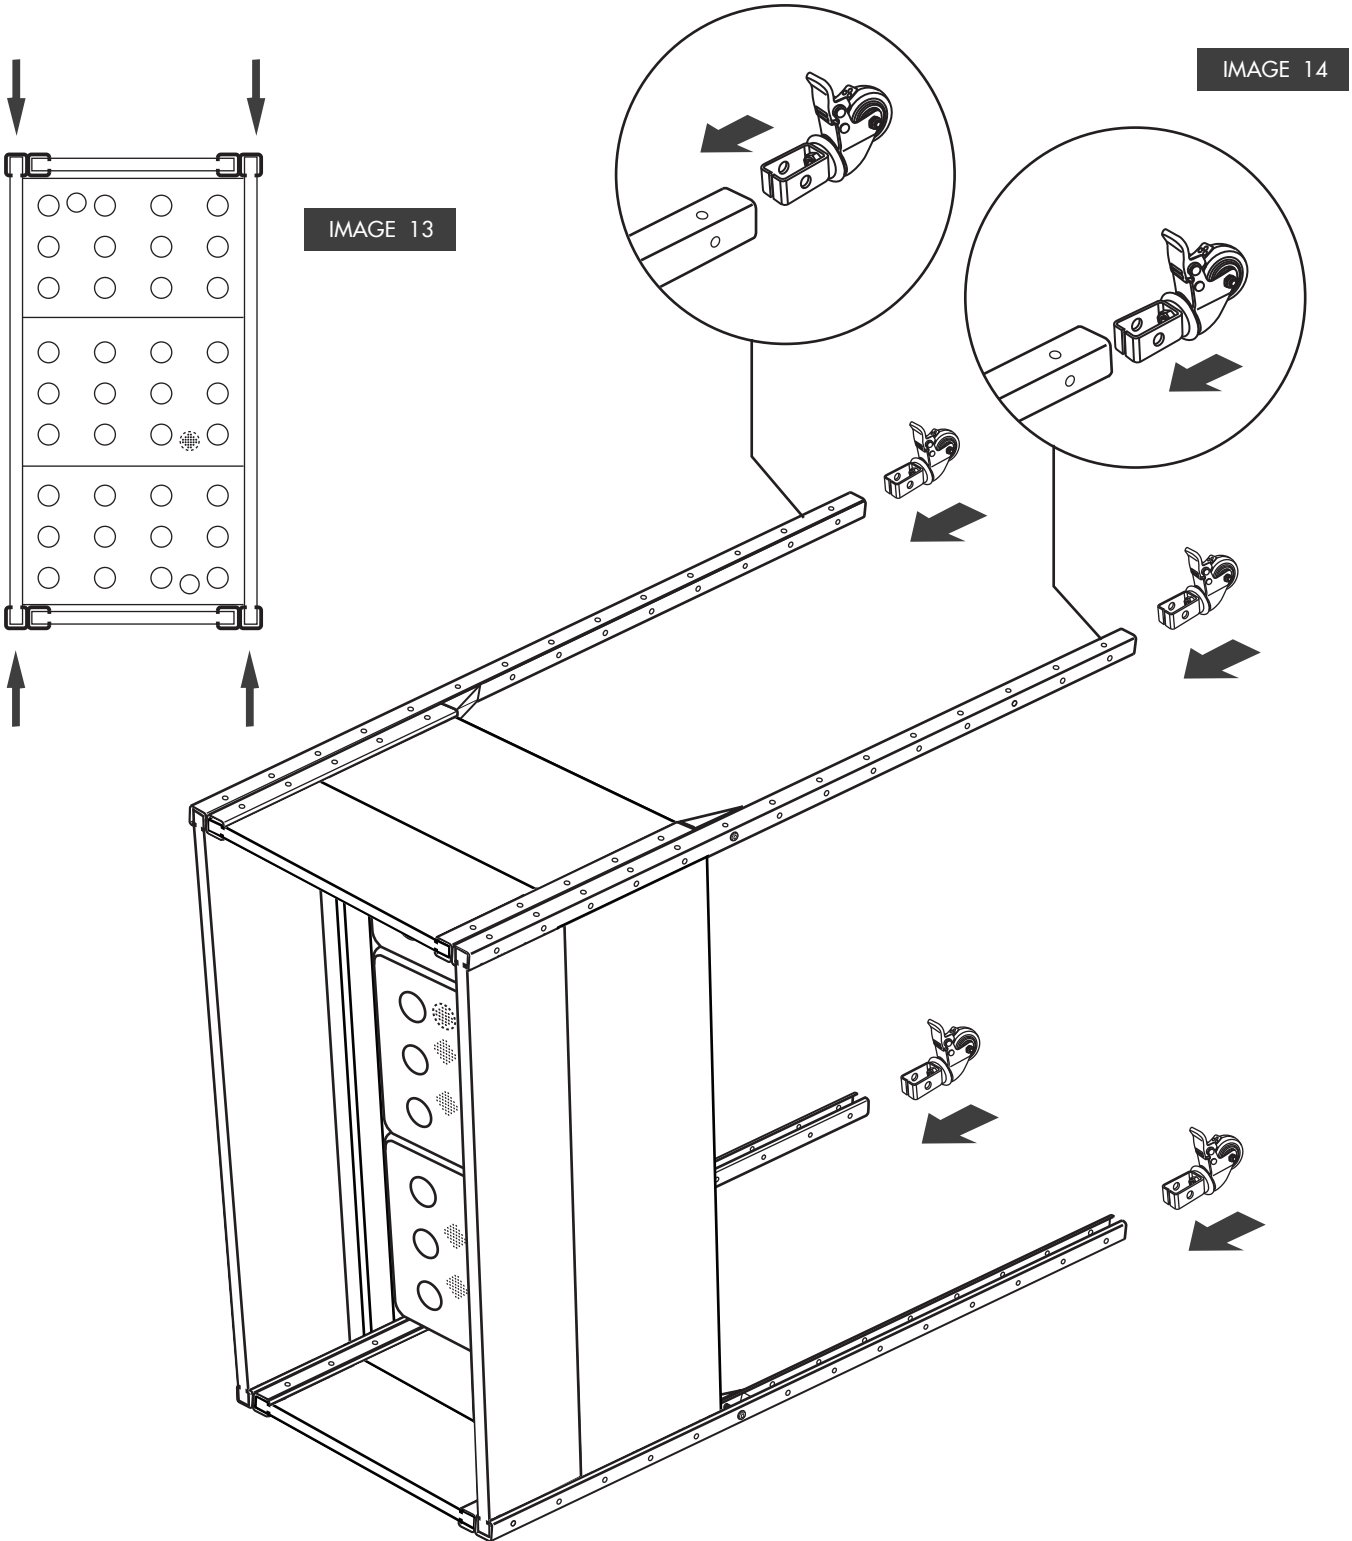


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Fix the wheels with bolts and nuts, as shown in Image 15.

IMAGE 15

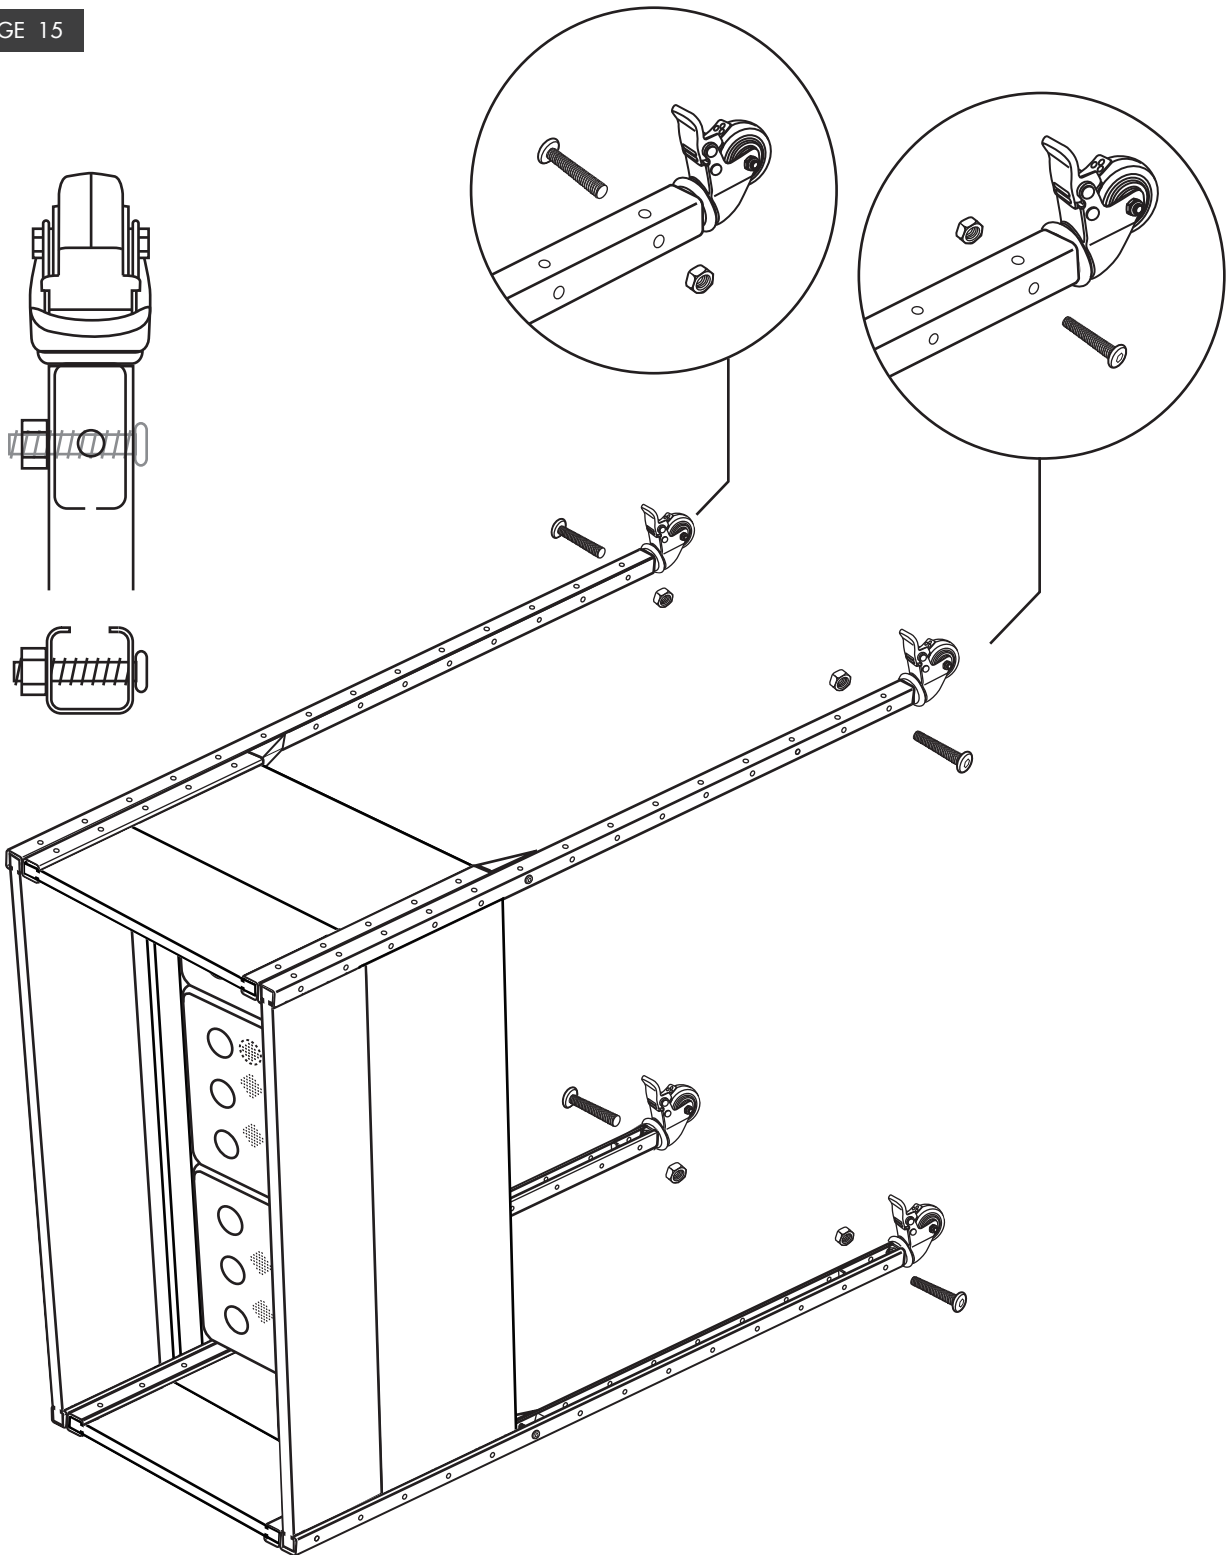


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Fasten bolts and nuts with nut driver and hex key which are included in pack , as shown in Image 16.

IMAGE 16

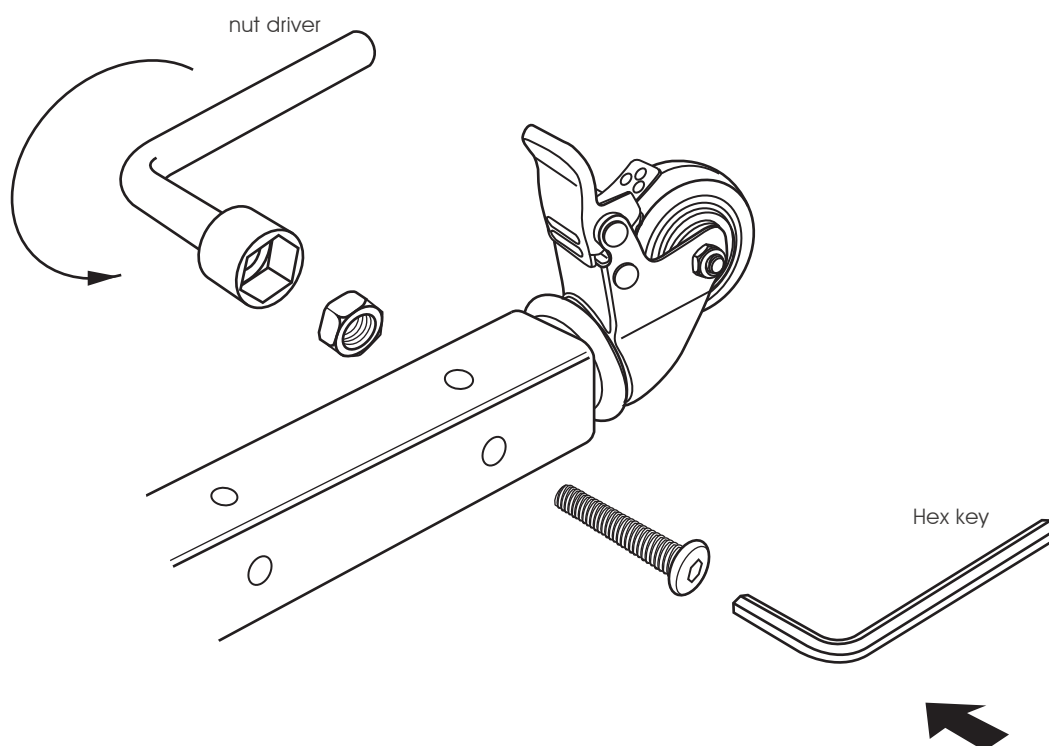


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

---

Flip over the planter again so it stands upright, as shown in Image 17.

IMAGE 17

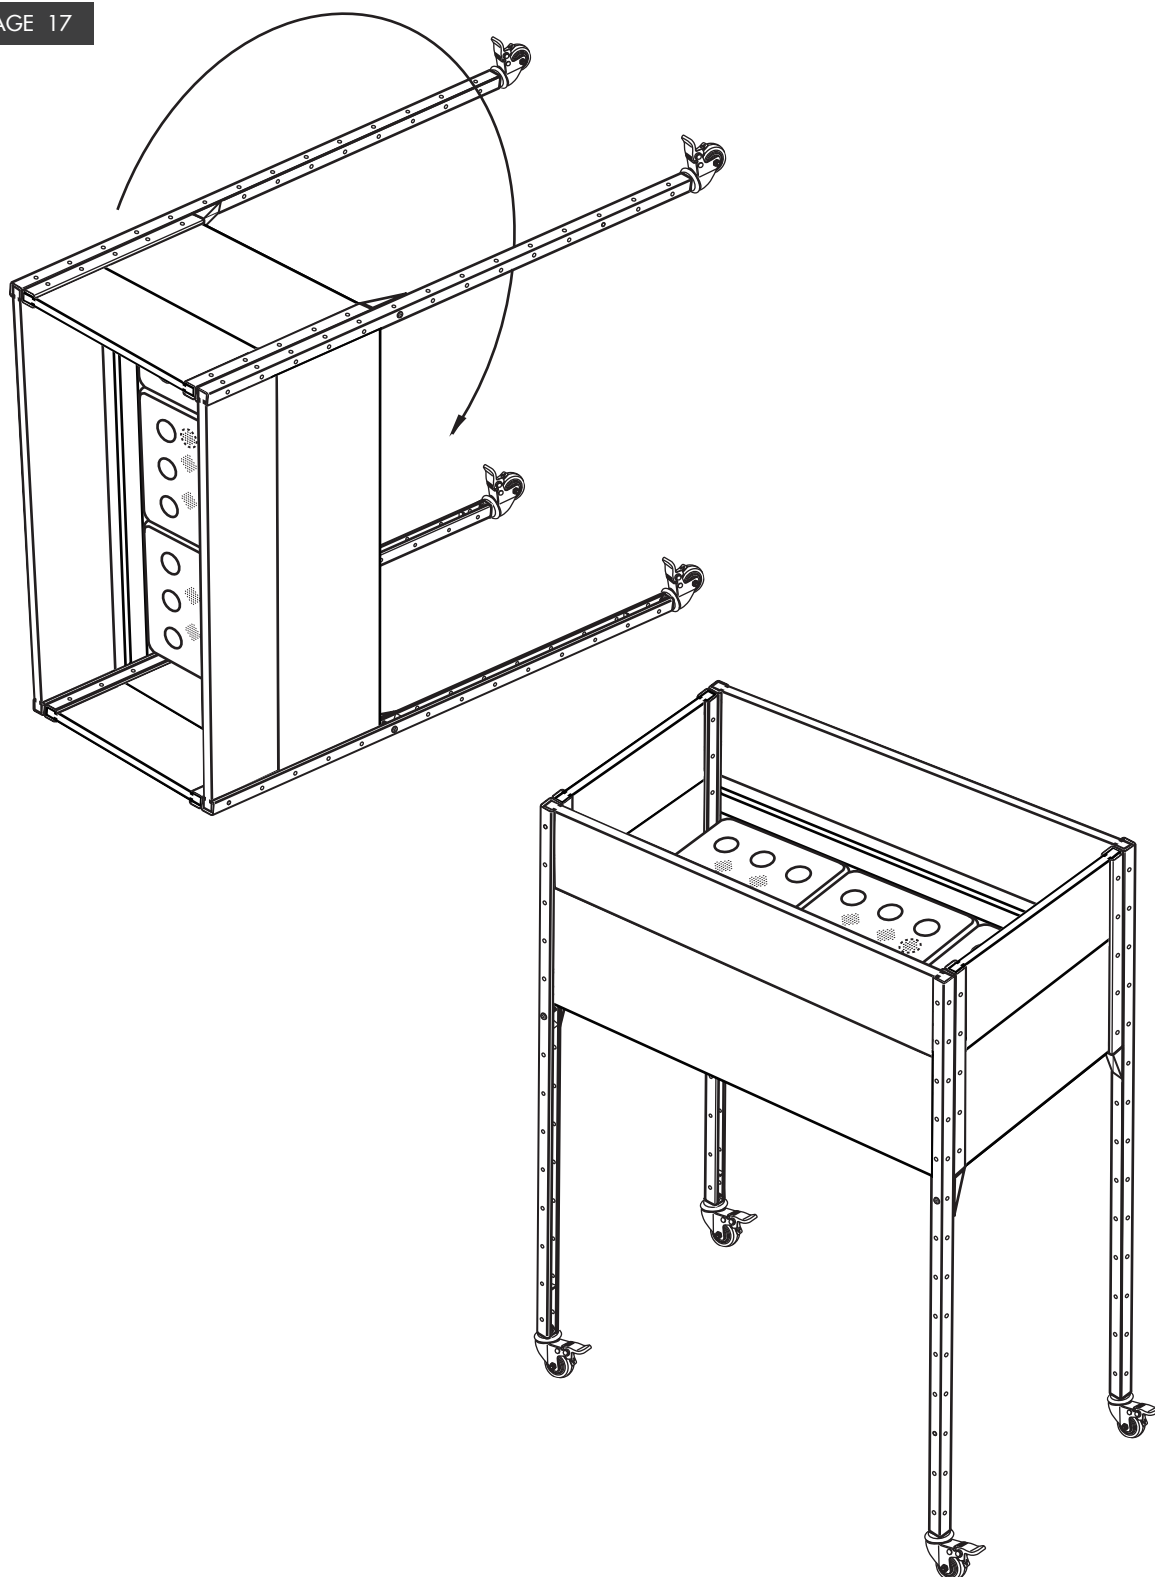


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Seal the small gaps between reservoirs and the gaps between reservoir and short boards with black tape, as shown in Image 18.

IMAGE 18

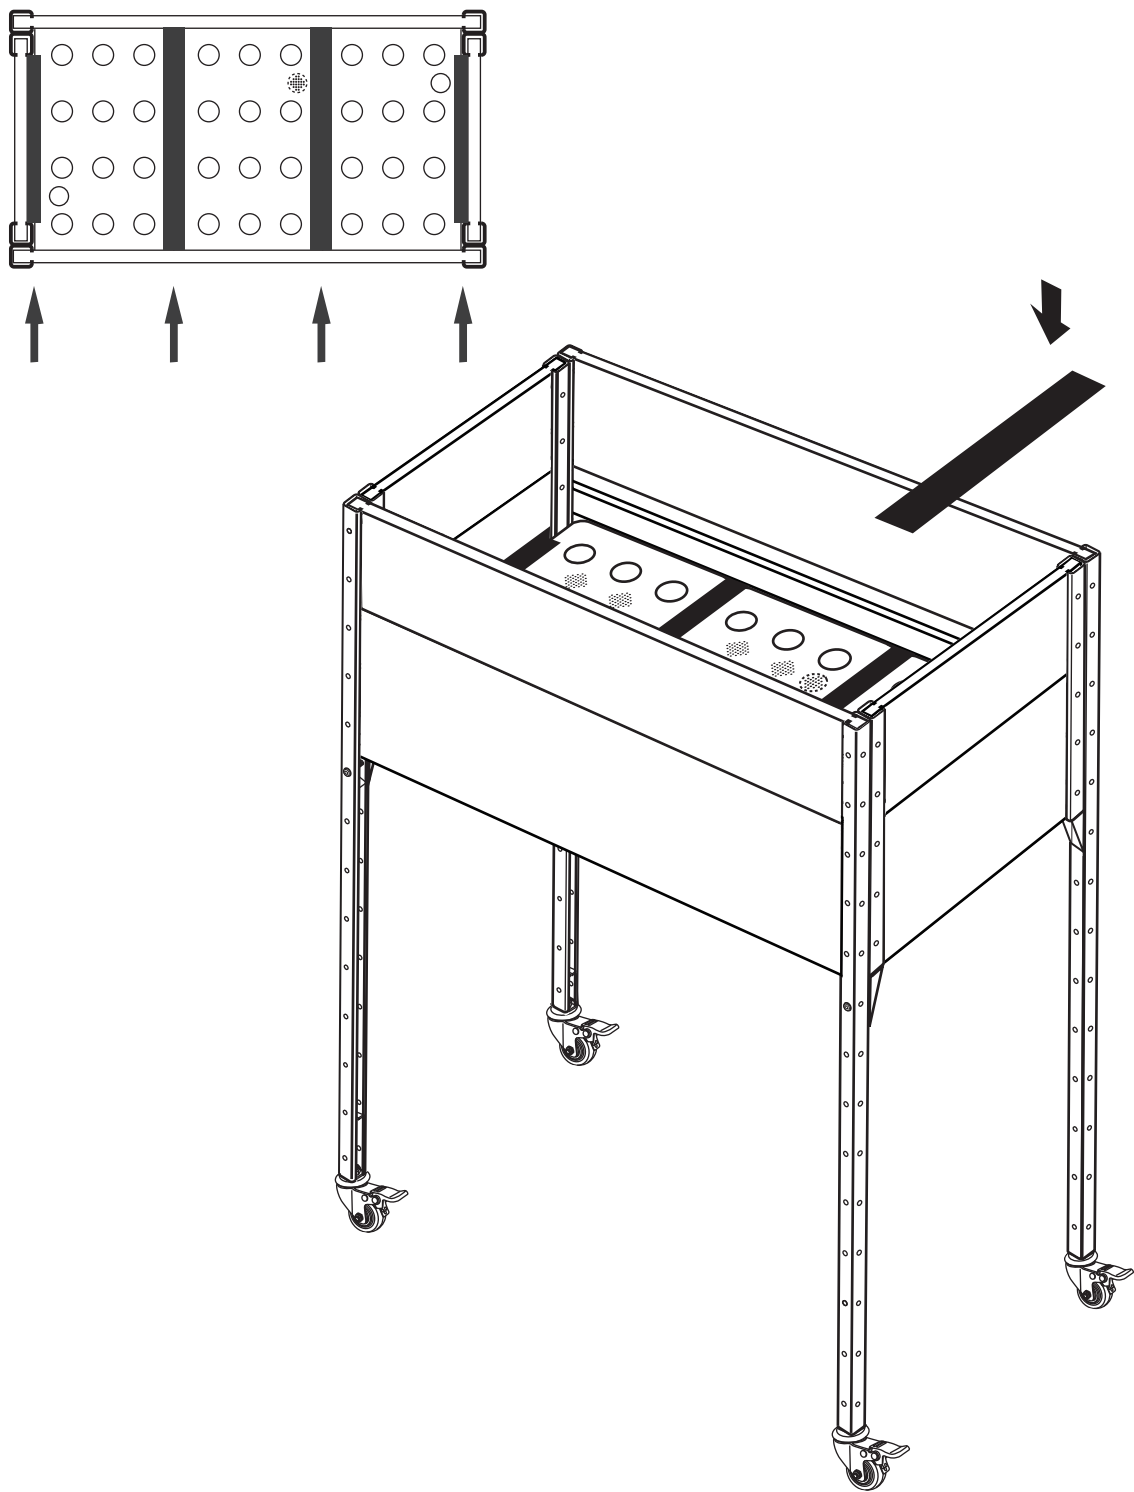


# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Insert two fill tubes to the bottom through the holes near corners, as shown in Image 19. Please pay attention to the direction of the fill tube, make sure the ends with small holes go into the reservoir.

IMAGE 19

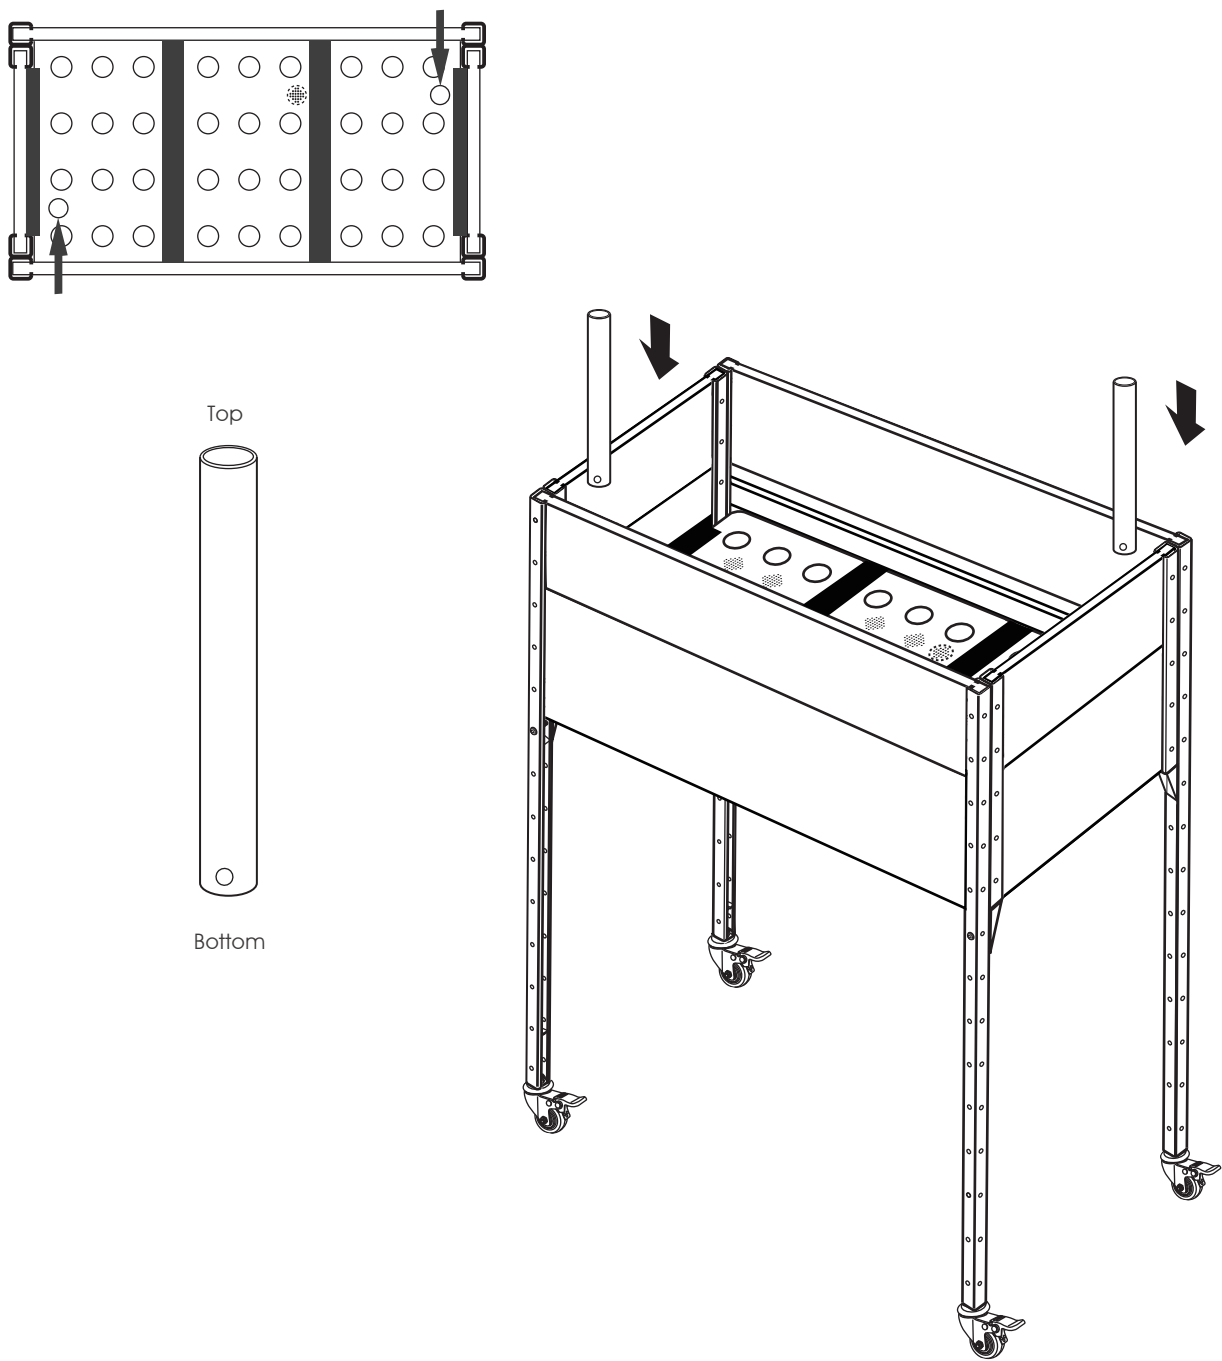

# Assembly

## Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

Insert water level indicator into the cap, as shown in Image 20. Then, put them into the fill tube, as shown in Image 21. Put the fill tube lid onto another fill tube. When you fill water, just remove the lid. Please do not misplace the lid after watering.

Note: Please keep the replacement parts in safe place. You may need them in the future.

IMAGE 20


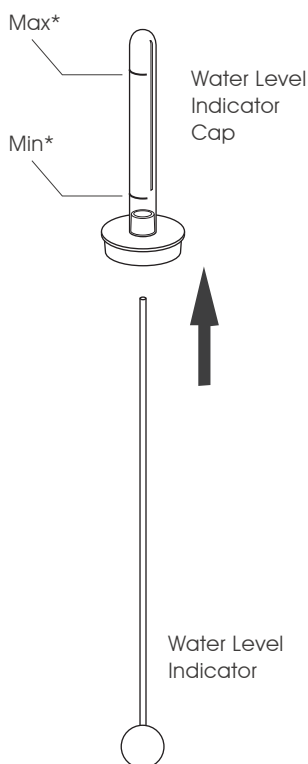


IMAGE 21

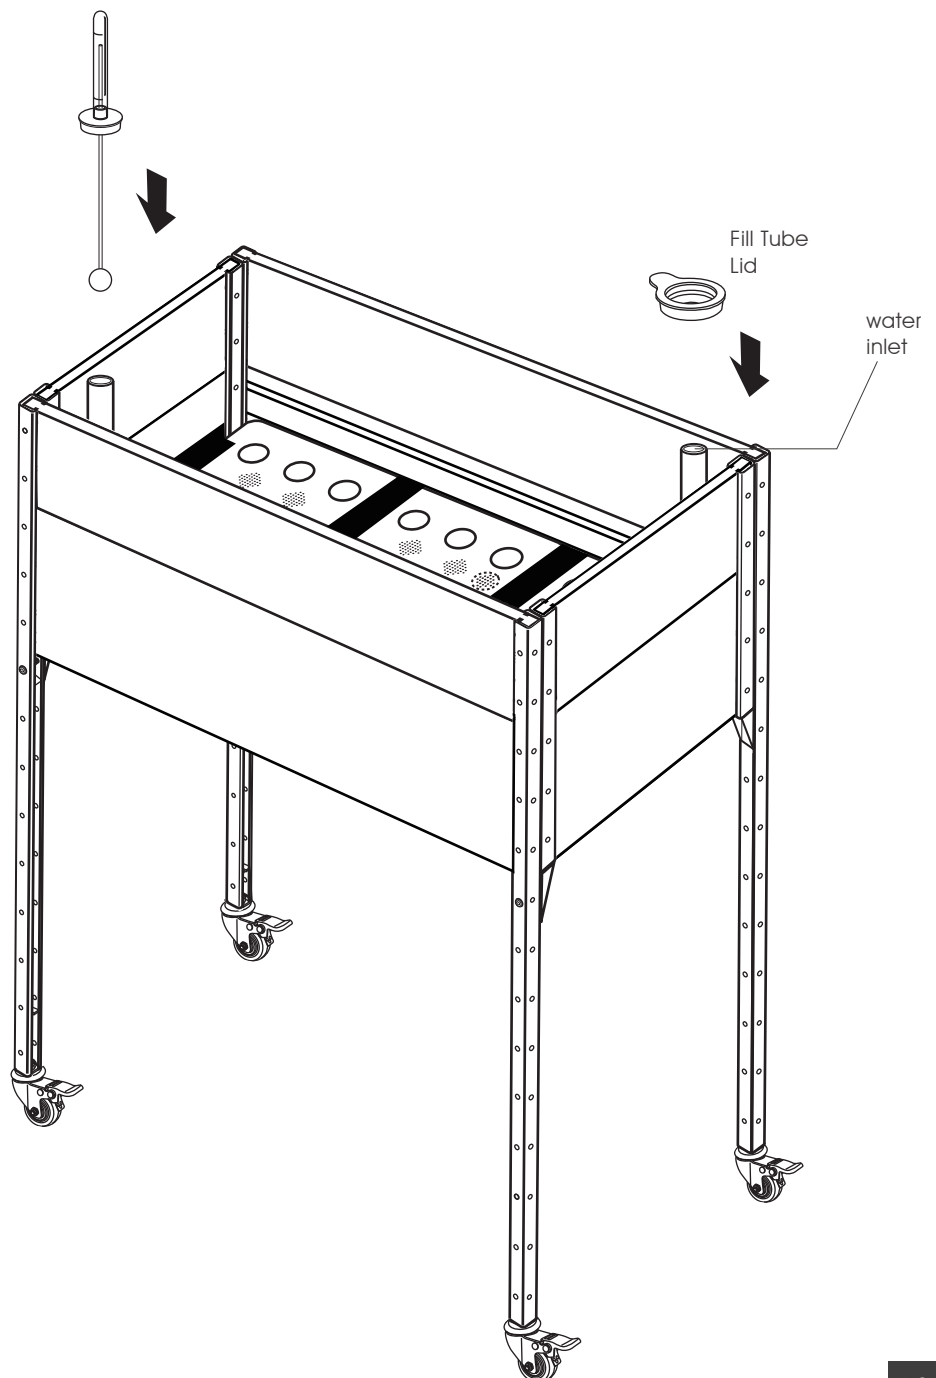


Max\*: Water in reservoirs is full.  
Min\*: Almost no water in reservoirs.

# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

If necessary, use your rubber mallet to ensure the boards are tightly in place. Cover the brackets with the 4 end caps, as shown in Image 22.

IMAGE 22

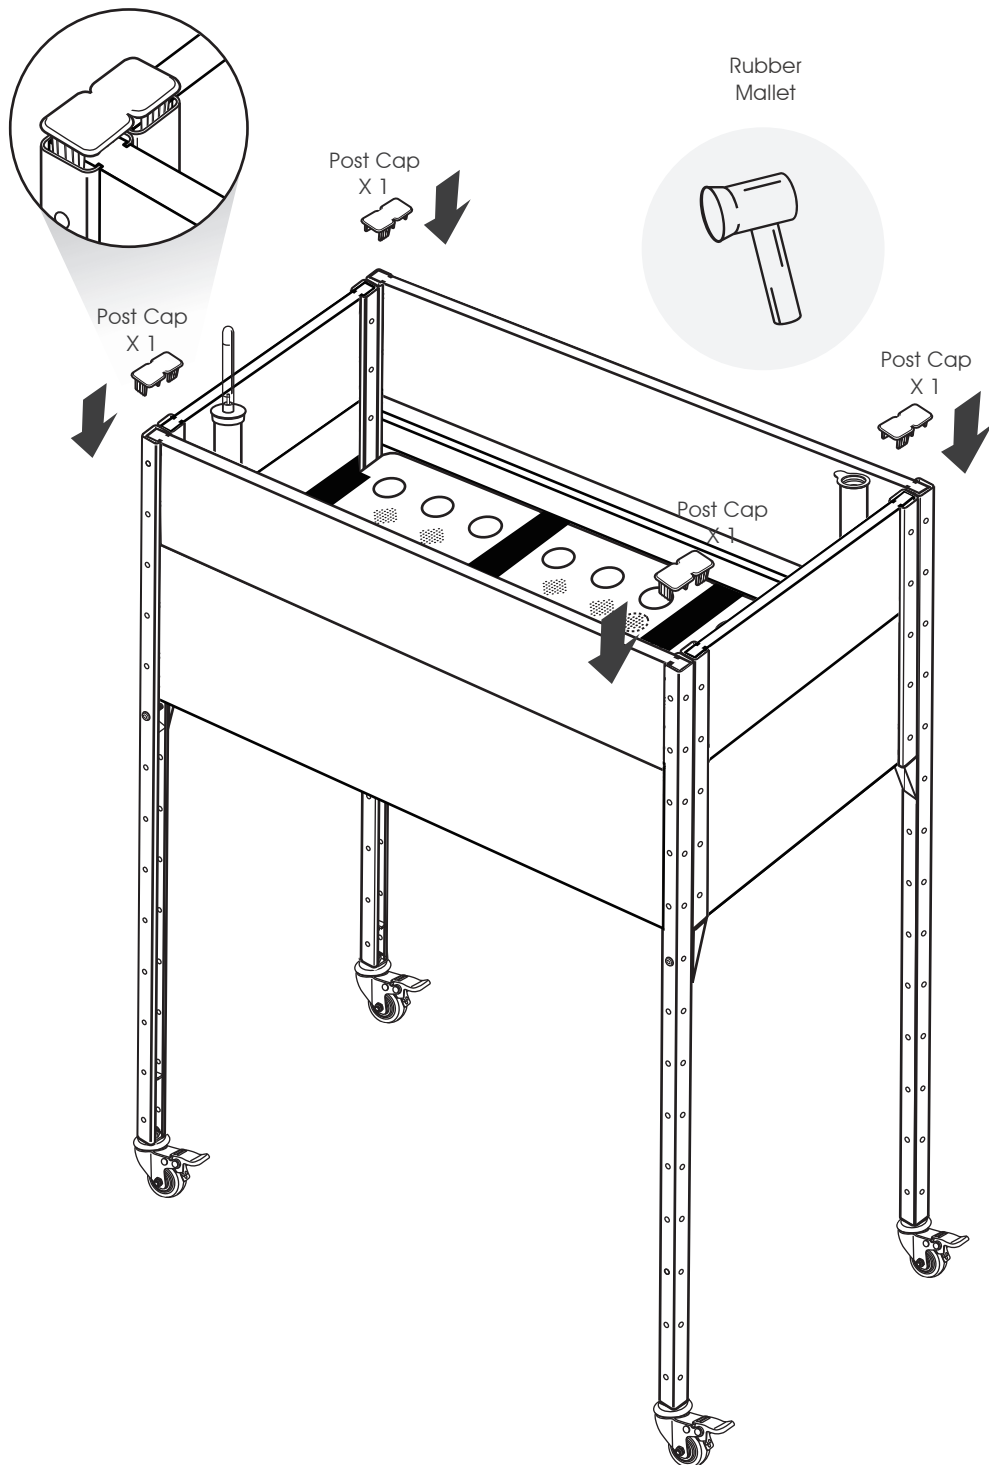




# Assembly

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

---

Now you get an EverBloom Self-Watering Mobile Elevated Garden with desired planting depth, as shown in Image 23. Then, enjoy your gardening time!

IMAGE 23

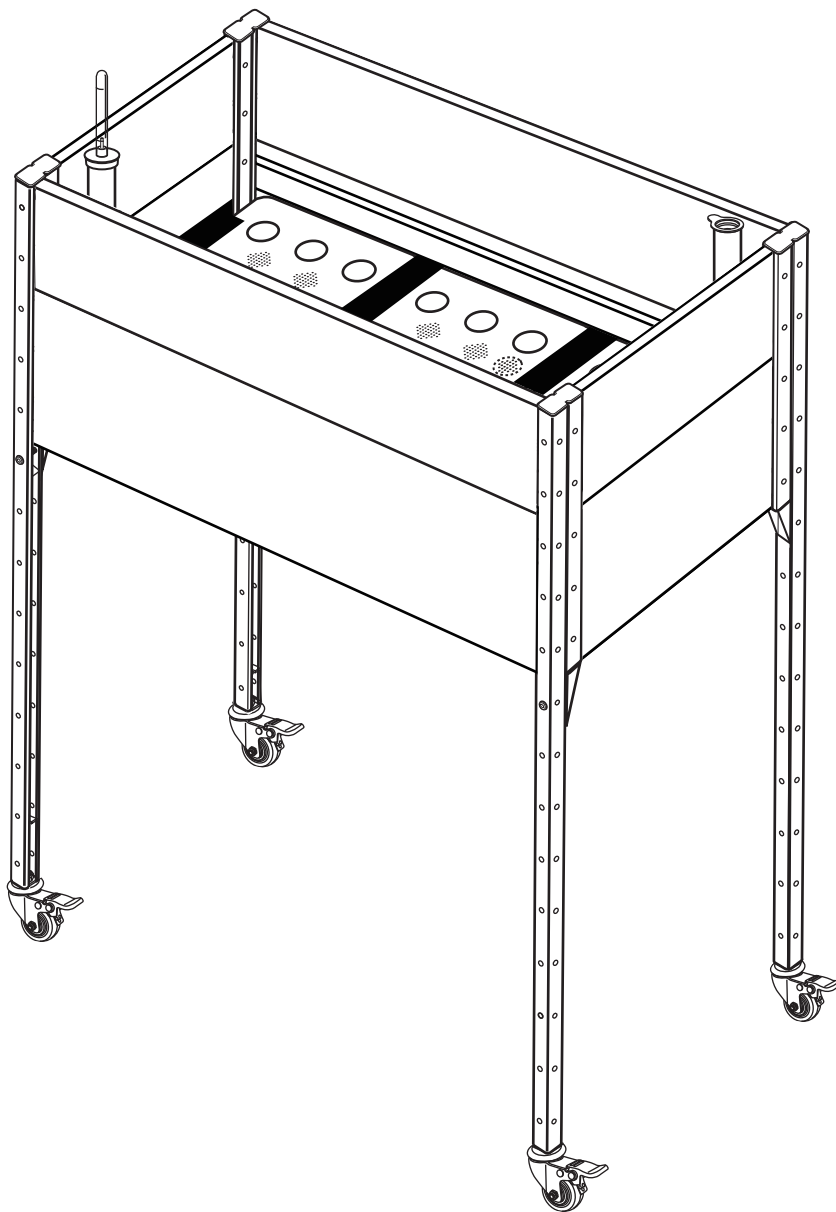

## Note

Self-Watering Mobile Elevated Garden - 36" L x 18" W x 36" H

---

Sometimes there might be a misalignment of the Corner Posts as shown in Image 24 and Image 25, which may result in difficulty of sliding boards into the brackets. Please adjust them to the right position so that they are parallel to each other, and perpendicular to the ground.

IMAGE 24

Assembling Problem 1


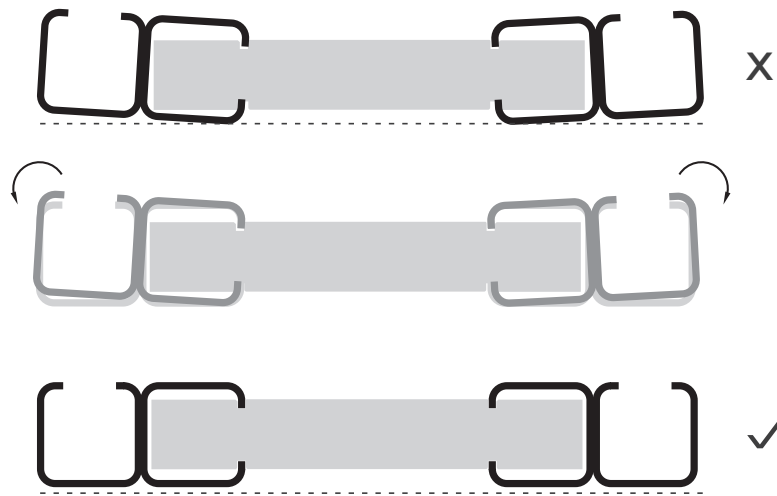


IMAGE 25

Assembling Problem 2

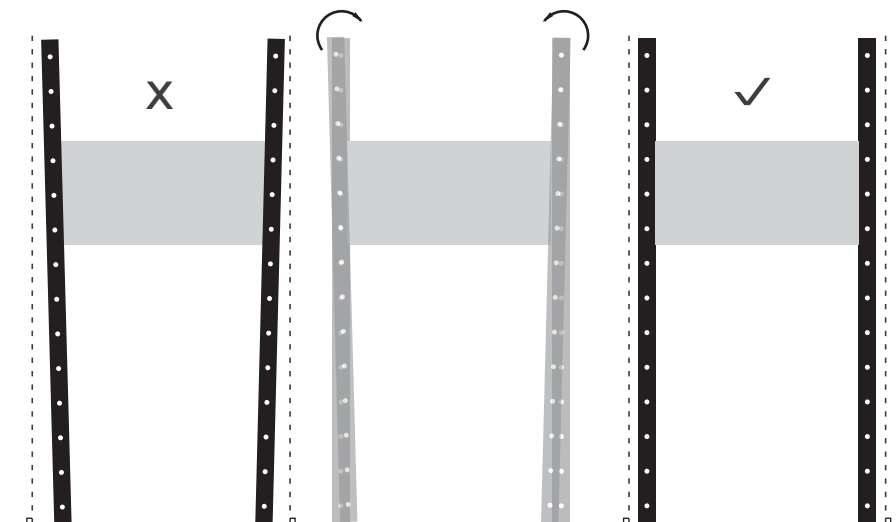

# Bloom On.

Everbloom-Garden.com

US Patent Pending

★ Subscribe at [www.everbloom-garden.com](http://www.everbloom-garden.com) for  
extra savings and upgrading information!



Distributed by:  
Dynaforge Trading LLC  
St. Paul, MN55101  
Email: [service@everbloom-garden.com](mailto:service@everbloom-garden.com)