


IMPORTANT INFORMATION

To avoid the risk of electrocution, please turn OFF the electricity supply mains before commencing the installation.

Do not stand the mirror upright on hard surfaces whilst fitting as this will damage the edge. Keep the plastic corner protectors on until installation is fully completed.

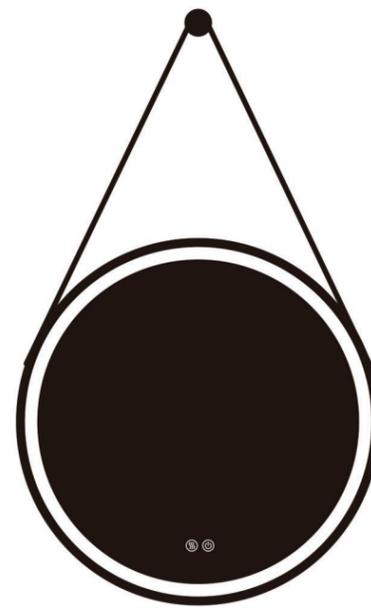


1. Installation

Note: Keep the plastic corner protectors on until installation is fully completed.


Step 1

Use the tape measure to survey the high, and draw the horizontal line and the vertical line of the wash-basin.

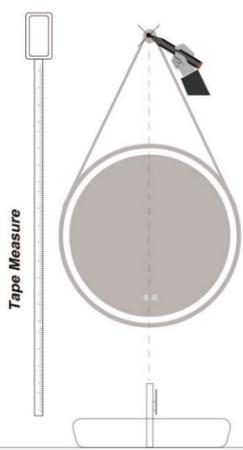


Step 2

Measure the distance of the holes, and mark the holes' place

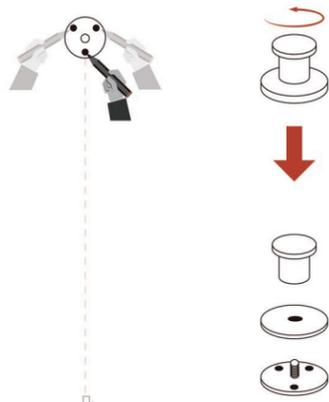


Step 3

Drill and insert the Wall Anchor

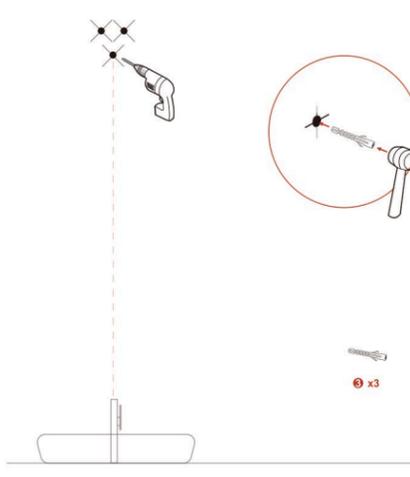


Step 4

Align the holes of the accessory with the screws and hang them to complete the installation

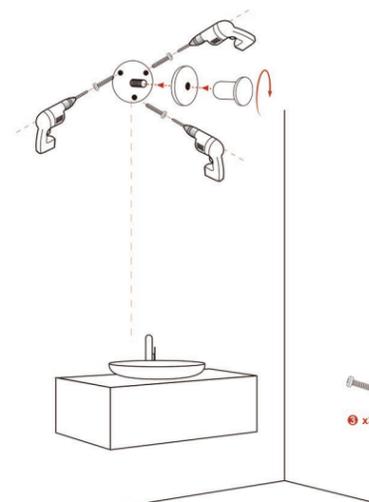


Step 5

Hang the mirror with the pendant, measure the position of the holes with the tape measure

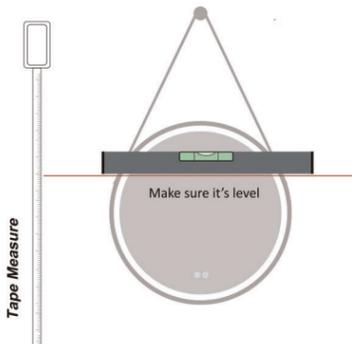

Step 6

Use the tape measure the height, and draw the horizontal line and the vertical line of the wash-basin.






Step 7

Drill and insert the Wall Anchor



Step 8

Connect the mirror wires with your main wires and hang the mounting hole to the screw on the wall.

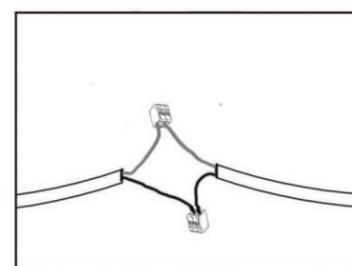

2,Connect the wire of the mirror to the wire of the plug and plug it into the socket

The plug has three wires,

- White=White wire connecting the plug wire to the neutral wire
- Black=the black wire connecting the live wire to the plug

2. Power Connection Instruction

Before you start the installation, please ensure that:
-the wall where the product is being installed is able to support the weight of the product
-the main electrical supply has been powered off to complete installation


The terminal connection method: A power cord on the wall is connected to a power cord on the mirror. There are 2 terminals in total.

There are two wiring methods:

1,Connect the wire of the mirror to the wire of the wall switch.

(1) You would see there 2 wires with 2 colors--white and black.

(2) Safely connect these 2 wires one by one to the wires of the wall switch in your home

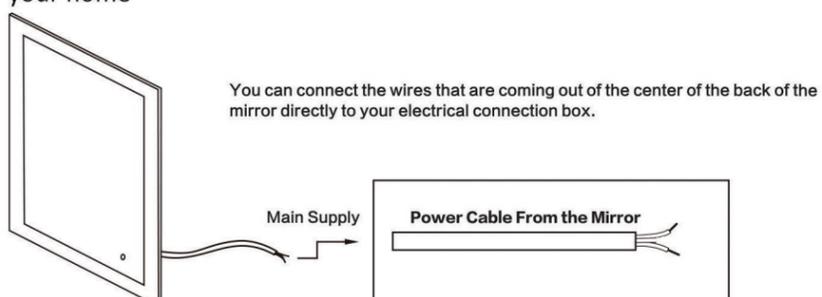

- White= Neutral wire connect to the White Neutral wire in your box.
- Black= LIVE wire connect to the Black LIVE wire in your box.

Operation

Lights and defogging will be automatically turned on when the power is turned on.

Lighting Color Adjust

Short touch the power button to adjust the lighting color.

It has three colors to select, natural light/warm yellow/white light



1. Short touch the power button to turn the light ON/OFF.

Short touch again to choose the light (natural light/warm yellow/white light).

2. Long touch the power button to dim the currently selected light.



3. the defogging function will turn off automatically after one hour in order to save electricity. If you want to re-open this function, you can re-touch the switch.