



Portfolio® is a registered trademark of
LF, LLC. All rights reserved.


ITEM #0356744

POST LANTERN

MODEL #FY12-001

Français p. 8

Español p. 15

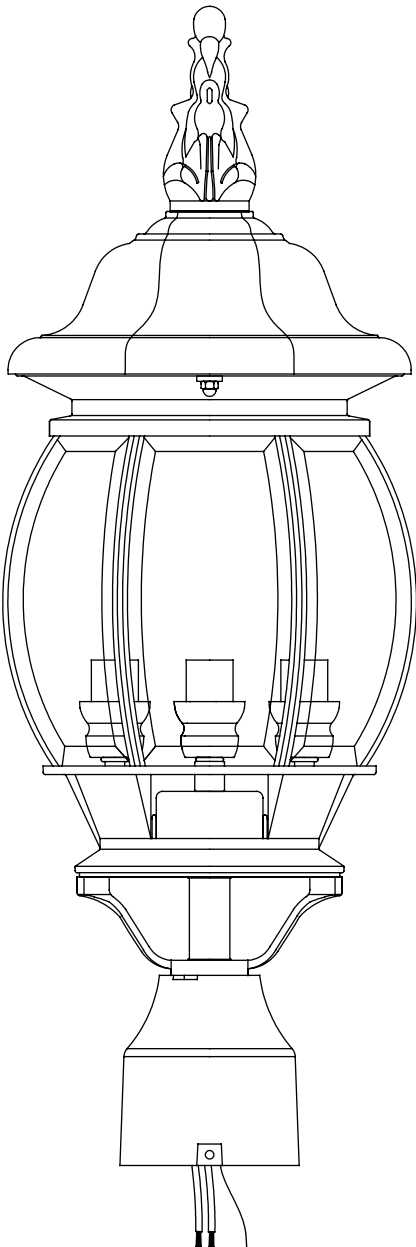

ATTACH YOUR RECEIPT HERE

Serial Number _____ Purchase Date _____




Intertek



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-800-643-0067, 8 a.m. - 6 p.m., EST, Monday - Thursday, 8 a.m. - 5 p.m., EST, Friday.




PACKAGE CONTENTS

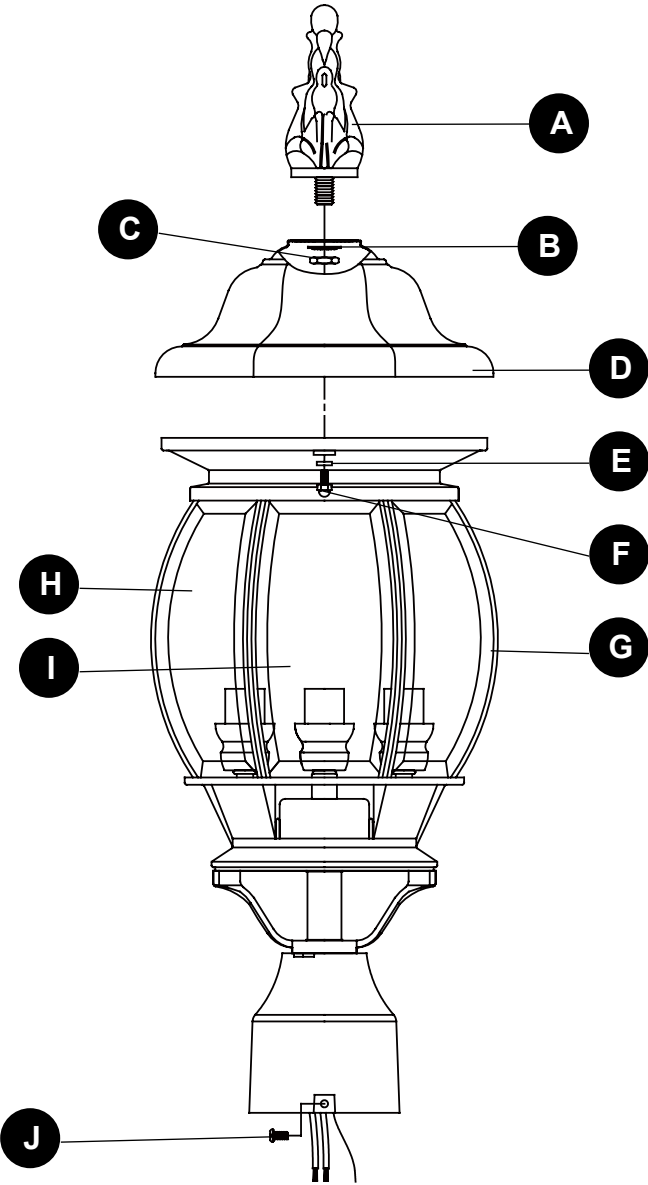

PART	DESCRIPTION	QUANTITY
A	Finial (preassembled to Cover (D))	1
B	Washer (preassembled to Finial (A))	1
C	Hex Nut (preassembled to Finial (A))	1
D	Cover	1
E	Rubber Ring (preassembled to Cap (F))	2
F	Cap (preassembled to Cover (D))	2
G	Fixture	1
H	Small Glass (preassembled to Fixture (G))	4
I	Large Glass (preassembled to Fixture (G))	4
J	Post Screw (preassembled to Fixture (G))	3

HARDWARE CONTENTS (shown actual size)

AA



Wire nut

Qty. 3

! SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

! WARNING

- TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- MINIMUM 75°C SUPPLY CONDUCTORS.

CAUTION

- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- If in doubt about electrical installation, consult a licensed electrician.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 35 minutes

Tools Required for Assembly (not included): Flathead screwdriver, Phillips screwdriver, Electrical tape.

Helpful Tools (not included): Wire strippers, Pliers, Wire cutters, Safety glasses, Step ladder.

ASSEMBLY INSTRUCTIONS


1. Strip 3/4 in. of insulation from wire ends. Twist stripped ends together with pliers (not included), black to black (power) and white to white (neutral). Attach copper wire to ground wire. **Helpful hint:** If necessary, attach copper ground wire to grounded outlet box.

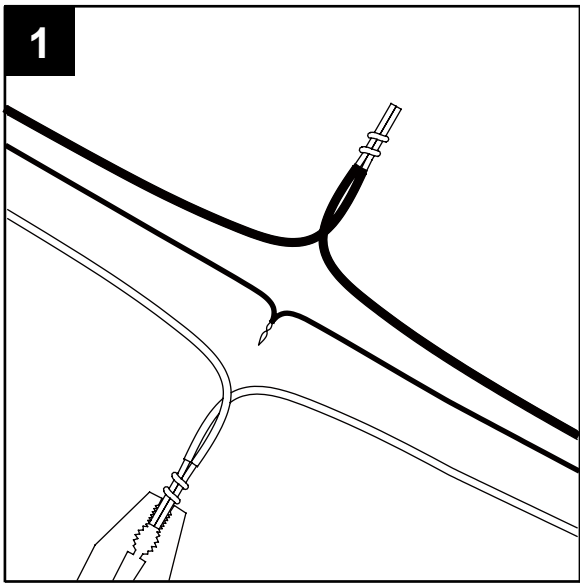


2. Attach wire nuts (AA). Tape wire nuts (AA) and wires together.

Hardware Used

AA Wire nut x 3

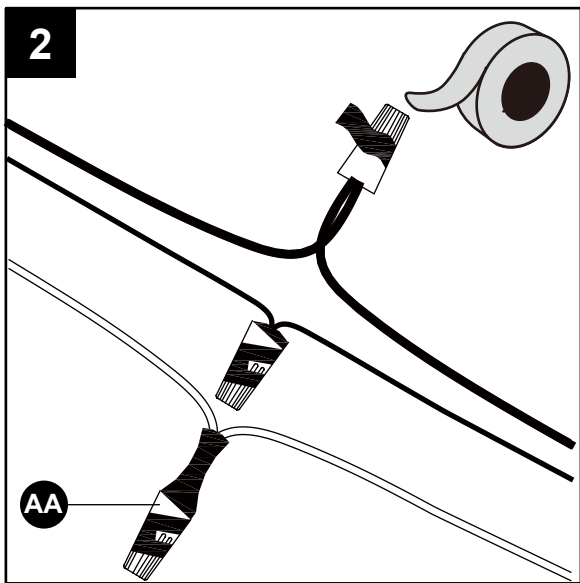


3. Check the post and if there are no pilot holes on it, drill the holes on it, drill the holes then place fixture (G) onto the post (not included), and secure with post screw (J).

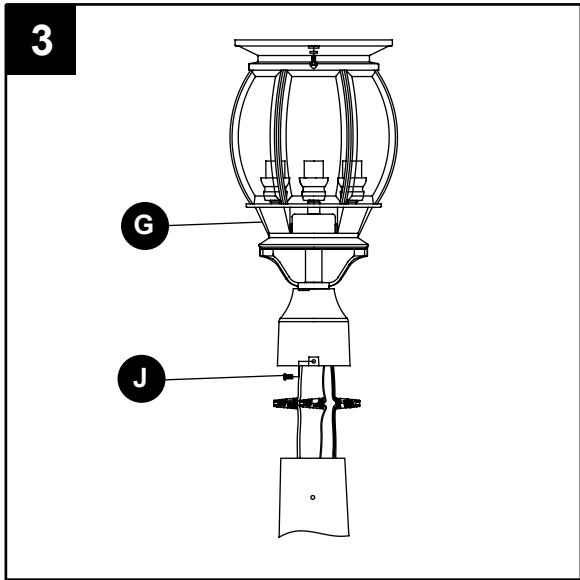


ASSEMBLY INSTRUCTIONS

4. Install light bulbs (not included). Use three 60-watt max. candelabra-base bulbs or three 13-watt candelabra-base CFL bulbs.

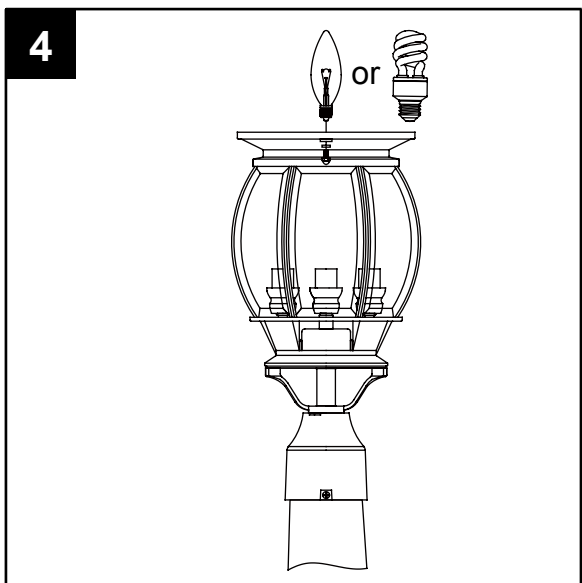

5. Remove caps (F) and rubber rings (E) from cover (D). Install finial (A) with washer (B) and hex nut (C) to cover (D), place cover (D) on fixture (G), securing with rubber rings (E) and caps (F).

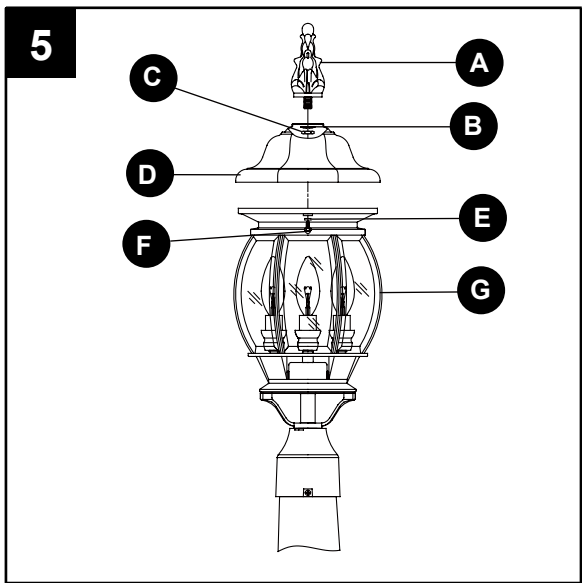

- Note: Before use, add silicone glass sealant between supporting surface and pole, leaving the bottom clear so moisture can drip down.

CARE AND MAINTENANCE

- Shut off main power supply before wiping product with damp cloth or window cleaner. Do not use abrasives.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Bulb won't light.	1. Bulb is burned out. 2. Power is off. 3. Faulty wire connection. 4. Faulty switch.	1. Replace light bulb. 2. Make sure power supply is on. 3. Check wiring. 4. Test or replace switch.
Fuse blows or circuit breaker trips when light is turned on.	Crossed wires or power wire is grounding out.	Check wire connections.


WARRANTY

The manufacturer warrants all of its lighting fixtures against defects in materials and workmanship for three (3) years from the date of purchase. If within this period the product is found to be defective in material or workmanship, the product must be returned, with a copy of the original sales receipt as proof of purchase in the original carton, to the place of purchase. The manufacturer will, at its option, repair, replace or refund the original purchase price to the consumer. This warranty does not cover fixtures becoming defective due to misuse, accidental damage, improper handling and/or installation and specifically excludes liability for direct, incidental or consequential damages. As some states do not allow exclusions or limitations on an implied warranty, the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights that vary from state to state.

REPLACEMENT PARTS LIST

For replacement parts, call our customer service department at 1-800-643-0067, 8 a.m. - 6 p.m., EST, Monday - Thursday, 8 a.m. - 5 p.m., EST, Friday.

PART	DESCRIPTION	PART #
AA	Wire Nut	375-022000
F	Cap	110-080700
J	Post Screw	109-040802

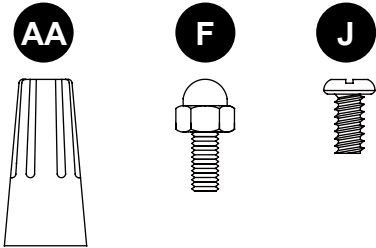

Printed in China
Portfolio® is a registered trademark of LF, LLC.
All rights reserved.