


2 General Information

2.1 Technical Data


Model identification		MT-C47464L8-V1.5	MT-C510065
Serie		MEGAWATT 30	MEGAWATT 36
Type of cooktop		30" Built-In Cooktop	36" Built-In Cooktop
Maximum Connected Load: @ 240 Volts		7.4 kW	10.0 kW
Maximum Connected Load: @ 208 Volts		6.4 kW	8.7 kW
Minimum Circuit Required		40 Amps	50 Amps
Number of cooking zones		4	5
Heating technology		Induction cooking	Induction cooking
Displays	Control Location	Front Center	Front Center
	Control Type	Electronic Touch	Electronic Touch
	Display Interface Color	Red	Red
Diameter of circular cooking zones (Ø) and Power	Left front	7-1/2" 2.0 kW	7" 2.0/2.5 kW (Boost)
	Left rear	6" 1.5 kW	6" 1.5/2.0 kW (Boost)
	Center	11" 2.4 kW	11" 2.5/3.0 kW (Boost)
	Right front	6" 1.5 kW	7" 2.1/2.5 kW (Boost)
	Right rear	--	6" 1.5/2.0 kW (Boost)
Cooktop Dimension	Overall Width	30-5/16 inches	35-7/16 inches
	Overall Depth	20-1/2 inches	20-1/2 inches
	Overall Height	2-3/16 inches	2-3/16 inches
Cabinet Dimension	Cabinet Width	30 inches	36 inches
Cutout Size	Cutout Width	29-3/16 inches	34-5/16 inches
	Cutout Depth	19-3/8 inches	19-3/8 inches

2.2 Product Description


Cookzone sizes, 4 zones

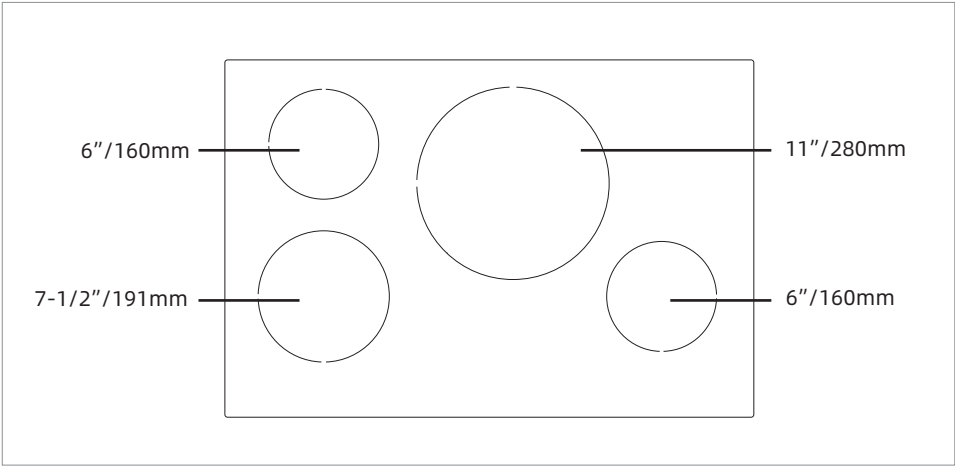

Cookzone sizes, 5 zones

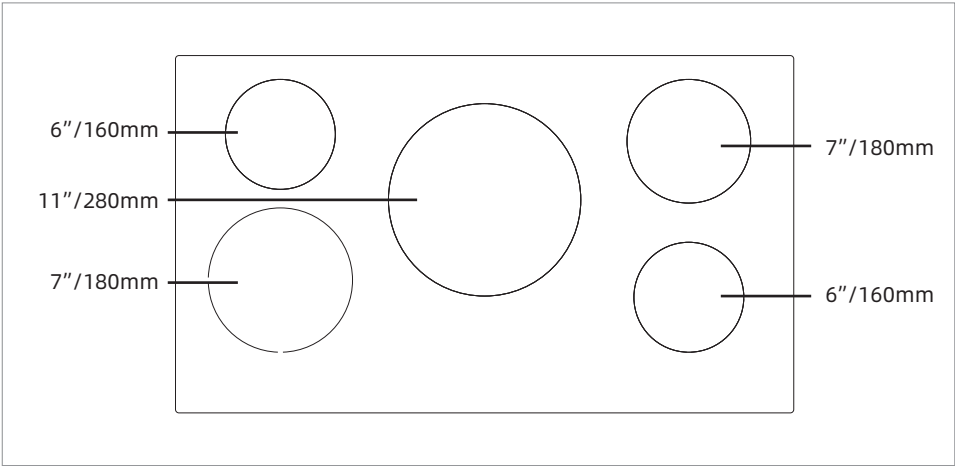

2.3 Control Panel

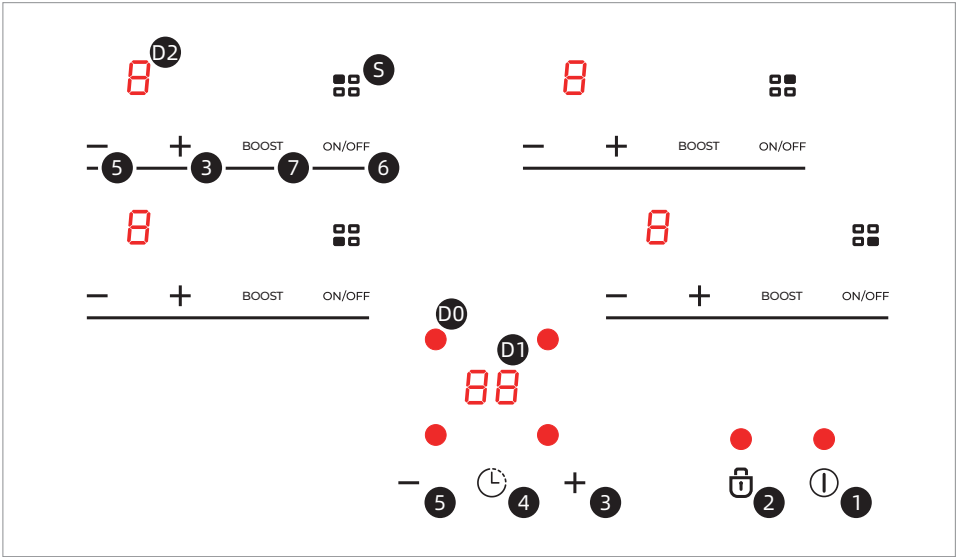

- 1 Power: Press to turn on or turn off the cooktop.
- 2 Lock: Lock the cooktop controls to prevent accidental activation of cooking zones.
- 3 Increase button: Press to increase the amount of
- 4 Timer On/Off: Press to turn the countdown timer on or off.
- 5 Reduce button: Press to reduce the amount of
- 6 Cooking Zone On/Off: Press to turn ON/OFF for that zone.
- 7 Boost
- D0 Cooking Zone Indicator: The LEDs (4 or 5 depending on the model) indicate cook zones. The one corresponding to the control's cook zone turns red.
- D1 Timer setting display: , ,
- D2 Power setting display: , ,
- S Zone sign