


ASSEMBLY INSTRUCTIONS

EEI-6883

V0.02.29.24

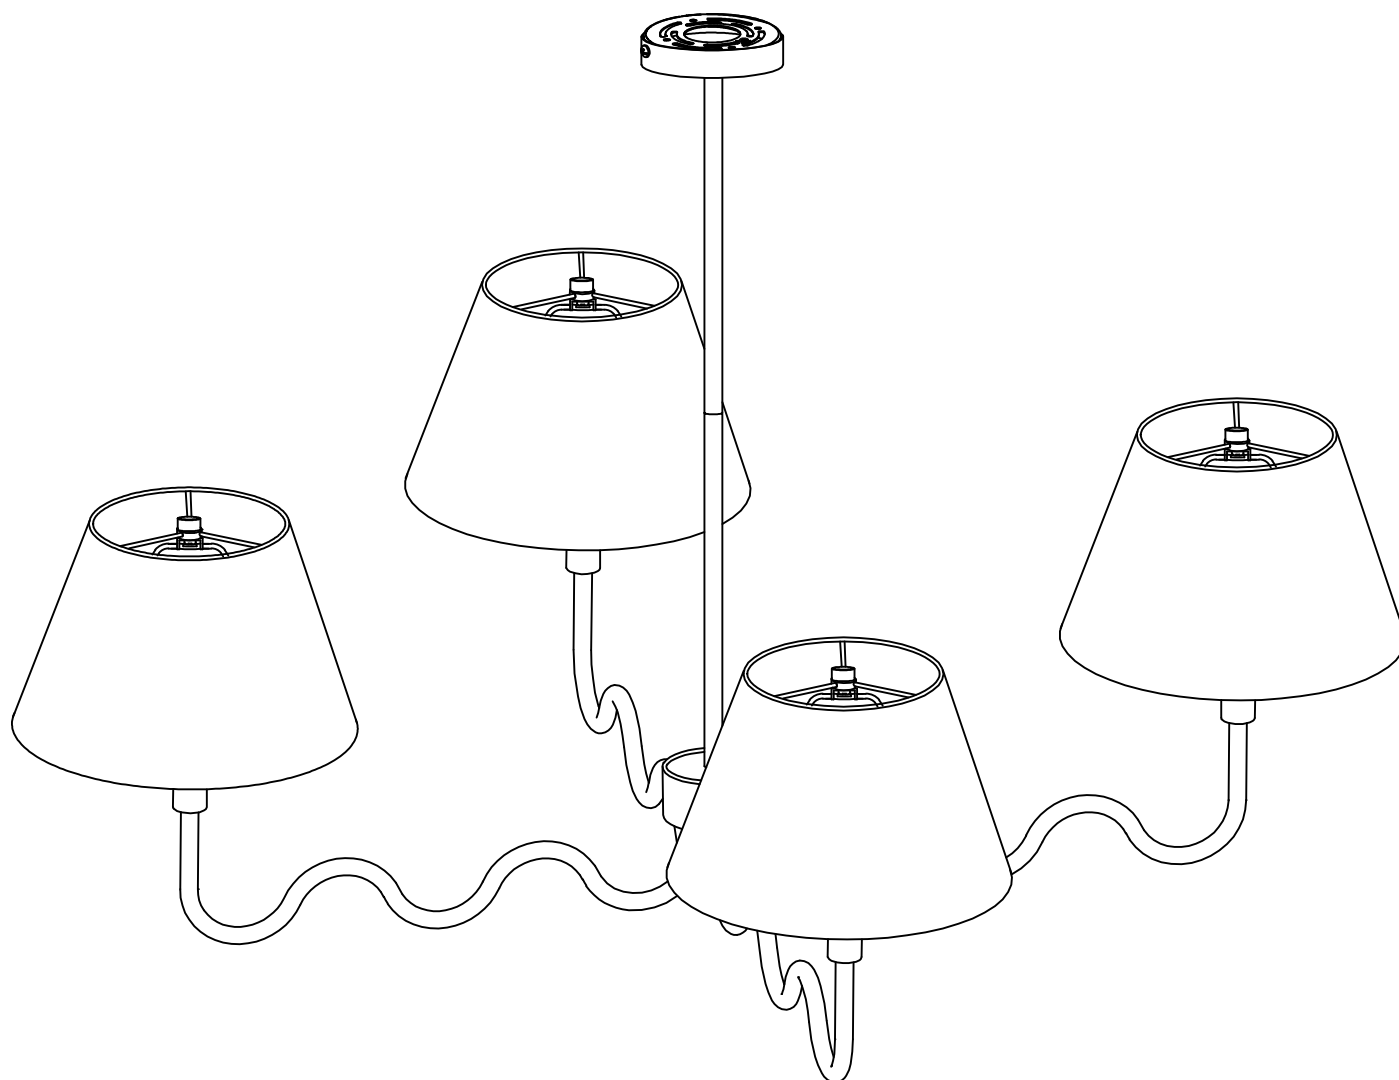

Questions? Contact us!


609.256.9000 • cs@modway.com
www.modway.com

***modway**

Let's get started!

*modway

Hardware included in the box:

A		Mounting Plate	x1
B		Long Screw	x2
C		Wire Caps	x3
D		Short Green Screw	x1
E		Side Screw	x2
F		Cord Anchorage	x1
G		Harp frame	x4
H		Finial	x4

What you need:

- 1   **Phillips Head Screwdriver**

You may also need:

- + Ladder
- + Electrical Tape
- + Wire Strippers or Cutters
- + Power Drill
- + Four (4) E26 (medium-base) Light Bulbs (MAX. 25W)

Wait!

Missing parts or hardware? Need assistance?

Contact us before returning your item.

We're here to help!

609.256.9000 • cs@modway.com

CONNECT WITH US!



Tag us **@modway_furniture** and **#modway** for a chance to be featured.

Before you begin, here are some things to keep in mind:

Read through all of the instructions before starting. Make sure you have all parts and components before discarding any packing materials.

When installing, we suggest hiring a professional electrician.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

Check all parts and hardware for damage. If the product is damaged, it should not be used.

We recommend LED bulbs. LEDs are better for energy consumption and can prolong the life of the fixture.

Installation and electrical connections must follow local and National Electric Code standards.

Ensure the main power supply is OFF before starting work to prevent electrical shock.

Allow the fixture to cool before changing the bulb. Fixture may get hot when in use.


CARING FOR YOUR ITEM

Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.


*modway

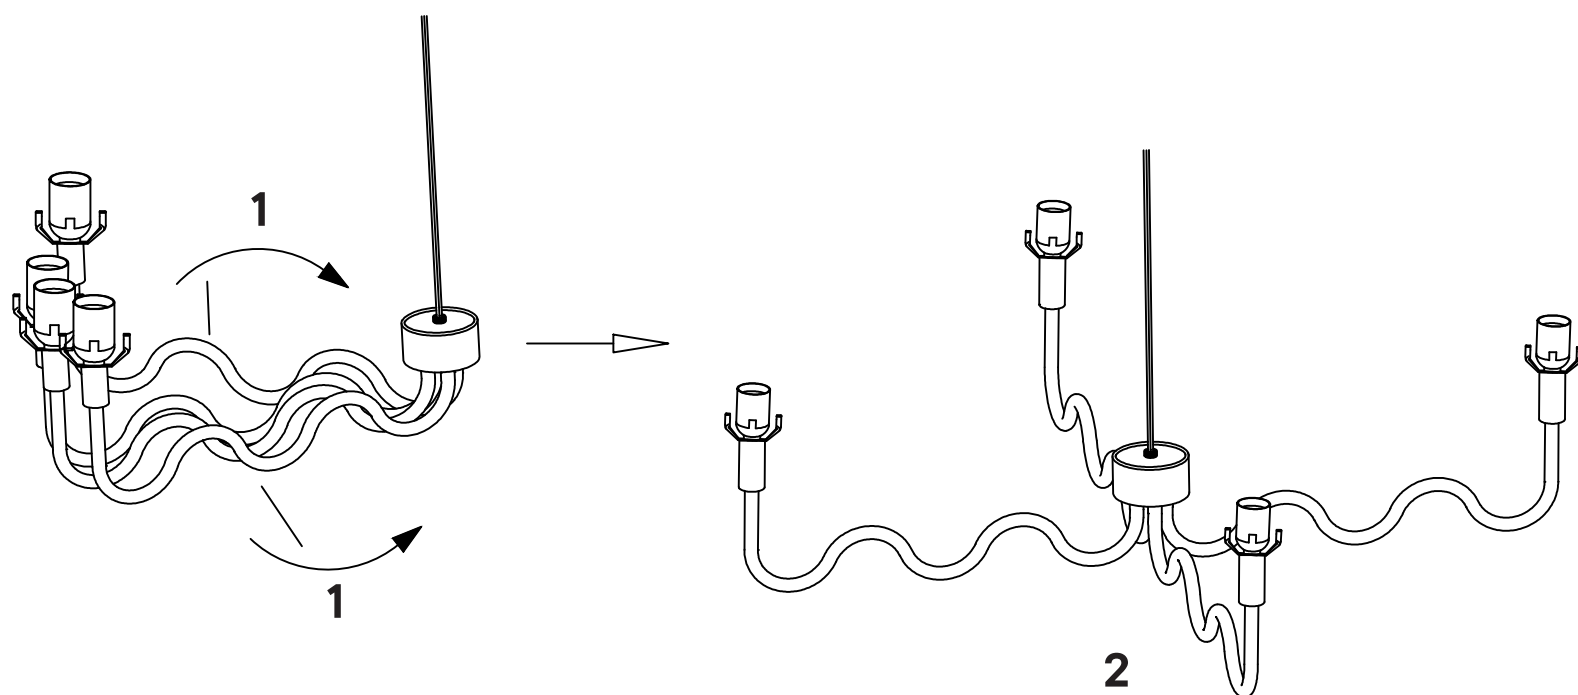

Step 1 and Step 2

Position the two arms as shown in the drawing

ATTENTION: When installing, we suggest hiring a professional electrician.

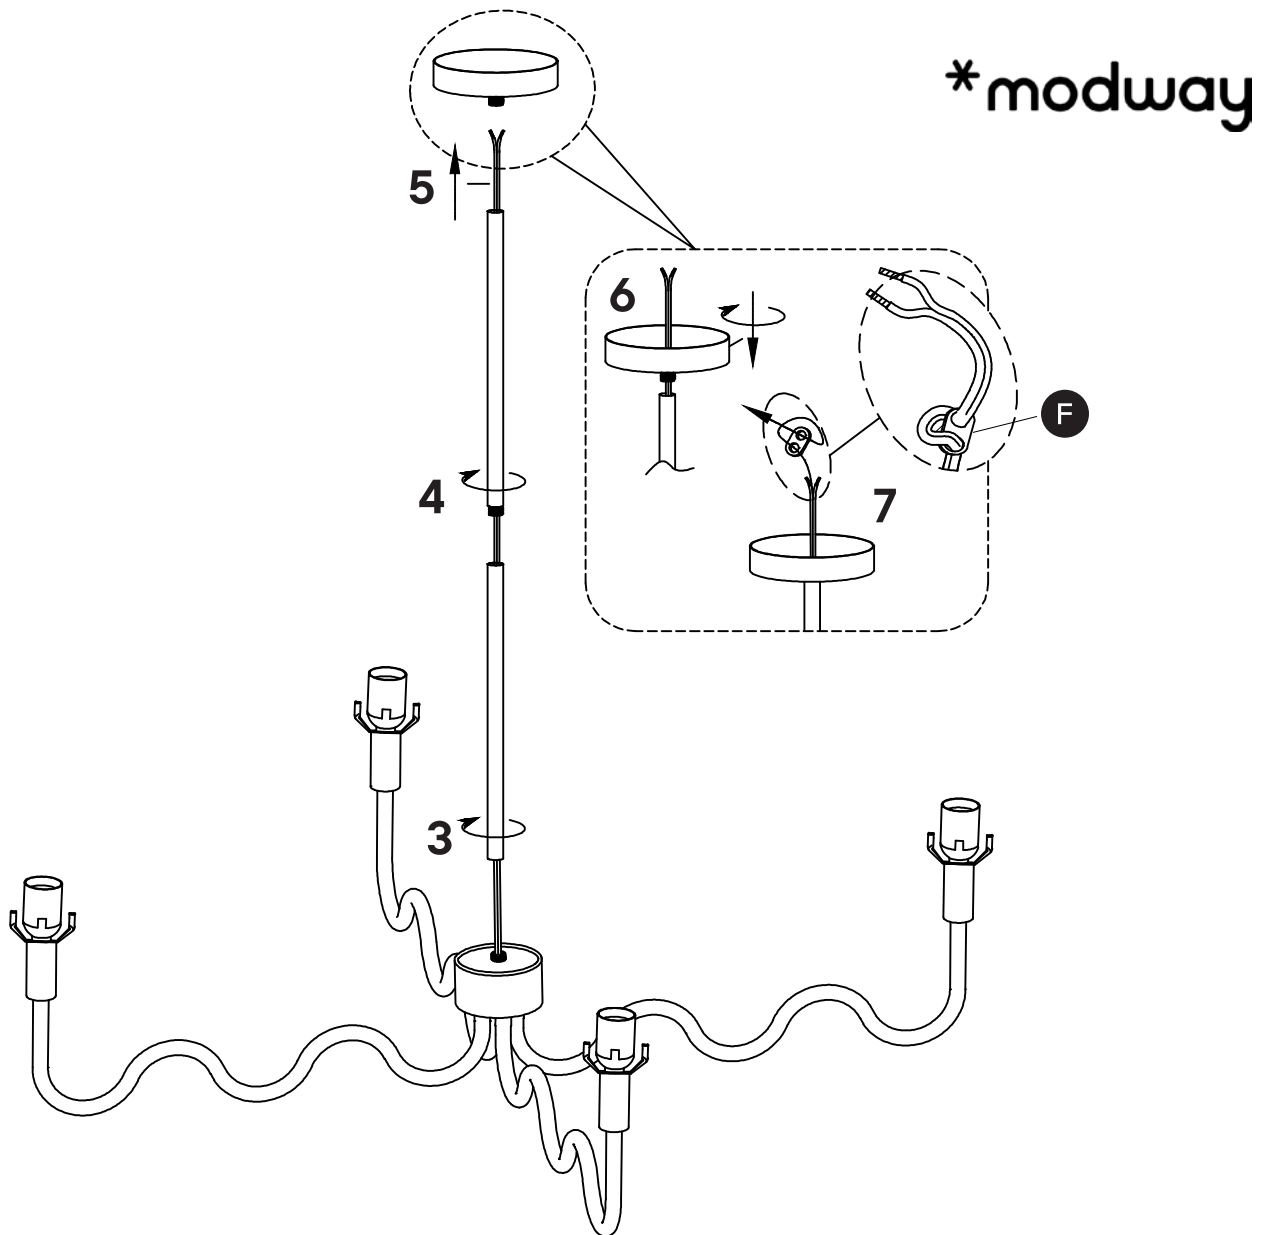

Step 3 and Step 4

Pull the wire through the metal rods and connect the metal rods to the center housing of the chandelier.


Step 5 Pull the wire through the ceiling canopy.

NOTE: There are various lengths of the metal hanging rod. Choose the desired length to accommodate the height of the ceiling.

Step 6 Connect the metal rods to the ceiling canopy.

Step 7 Pull the wire through the **Cord Anchorage (F)** as shown in the drawing.

ATTENTION: When installing, we suggest hiring a professional electrician.

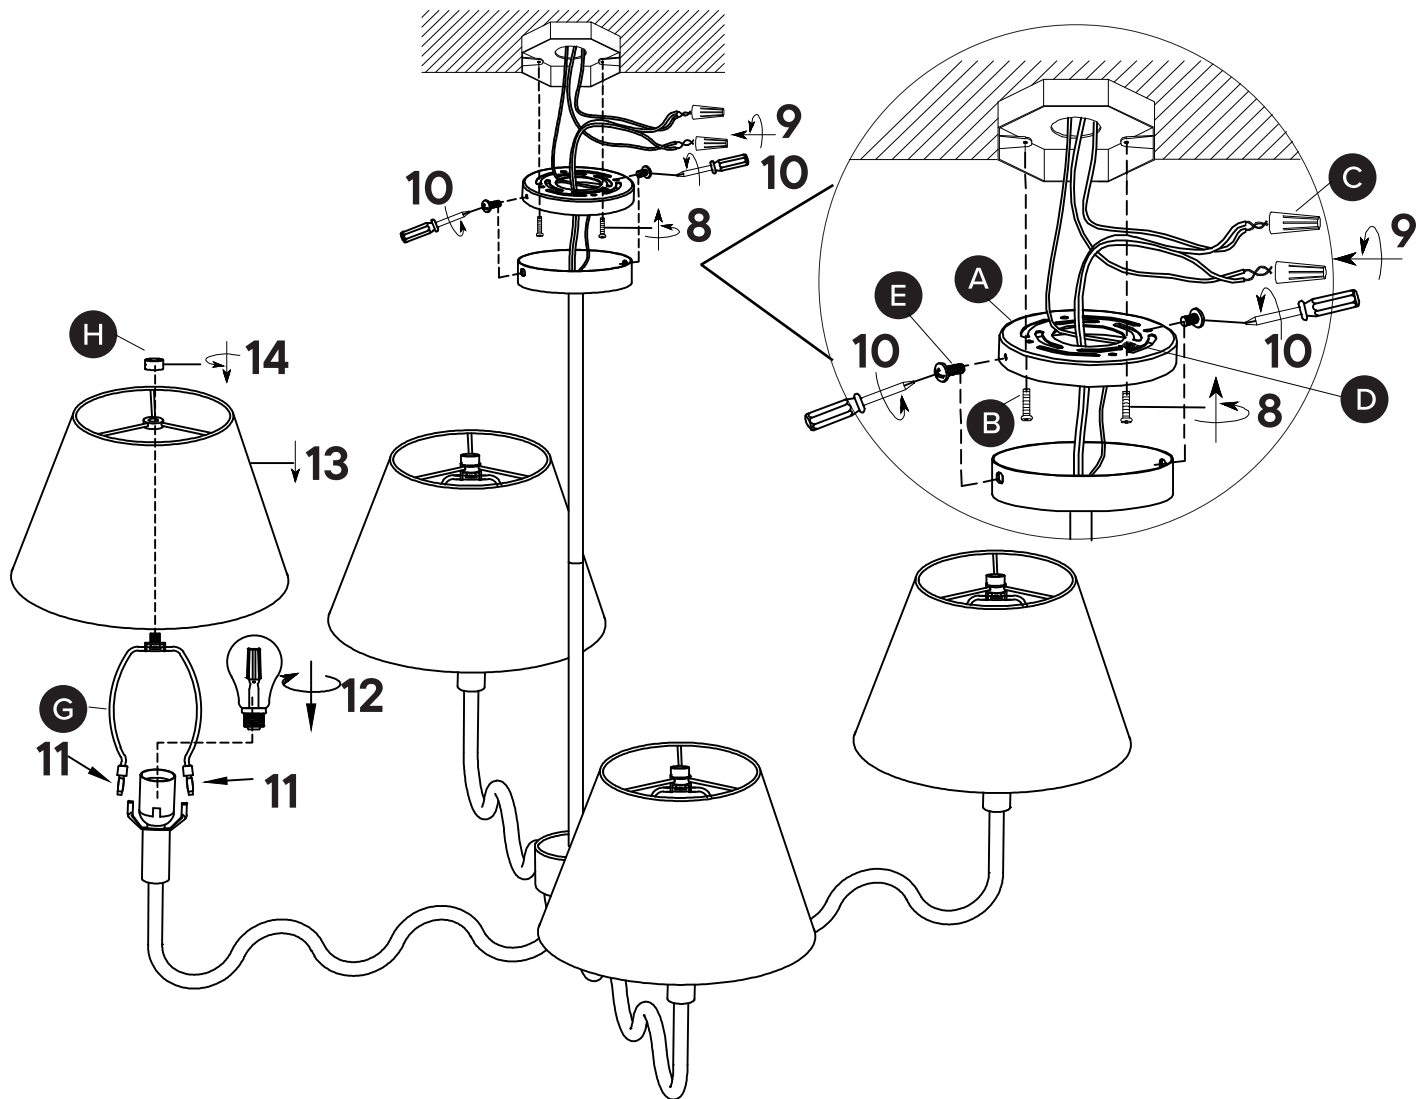

Step 8 Attach the **Mounting Plate (A)** to the junction box in the ceiling and secure it with **2 Long Screws (B)**.

Step 9 Connect wires with matching polarity. The black fixture wire connects to the black supply wire (live wire) and the white fixture wire to the white supply wire (neutral wire). Secure each connection using a **Wire Cap (C)**. Connect the copper fixture wire to the ground wire and secure the connection with a **Wire Cap (C)**. If there is not a supply ground wire, attach the copper fixture wire to the **Short Green Screw (D)** to ground.

Step 10 Attach the ceiling canopy to the **Mounting Plate (A)** and secure it with **2 Side Screws (E)**.

Step 11 Assemble the **Harp frame(G)**.

Step 12 Install light bulbs according to the wattage label (E26, MAX. 25W, bulbs not included).

Step 13 and Step 14

Attach the lamp shade to **Harp frame(G)** and fix it by the **Finial(H)**.

ATTENTION: To avoid the risk of fire, do not exceed the recommended wattage indicated on the wattage label.