

INSTALLATION INSTRUCTIONS

Item# 5283-788

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

MOUNTING THE FIXTURE

3. To begin, it will be necessary to remove mounting plate (A) from back plate (C) by removing screws (D) located on the side of the back plate (C). see fig. 1.
4. To begin installation, first attach mounting plate (A) to junction box (JB) **"not provided"** by using 8-32 screws (B). Make sure threaded holes are on the top and bottom when installing mounting plate. Adjust plate and tighten screws to secure mounting plate. The side of mounting plate (A) with **"GND"** marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wire as shown in Fig. 2, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to mounting plate (A) using green screw provided.
6. Tuck wire connections neatly into junction box (JB).

FINISHING THE FIXTURE

7. To mount the fixture to the wall. Slip back plate (C) over mounting plate (A) and align holes at top and bottom of back plate (C) with threaded holes on top and bottom of mounting plate (A).
8. Thread in screws (D) removed earlier to secure back plate (C) to mounting plate (A).
9. To begin installing the accessories, take the crystal bobèche (cb) and slip down over the candle sleeve (cs). Repeat the process until all crystals are fully installed.
10. Install 3x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

Set# A-020
-Mounting Plate
-Ground Screw
-Mounting Screw *2

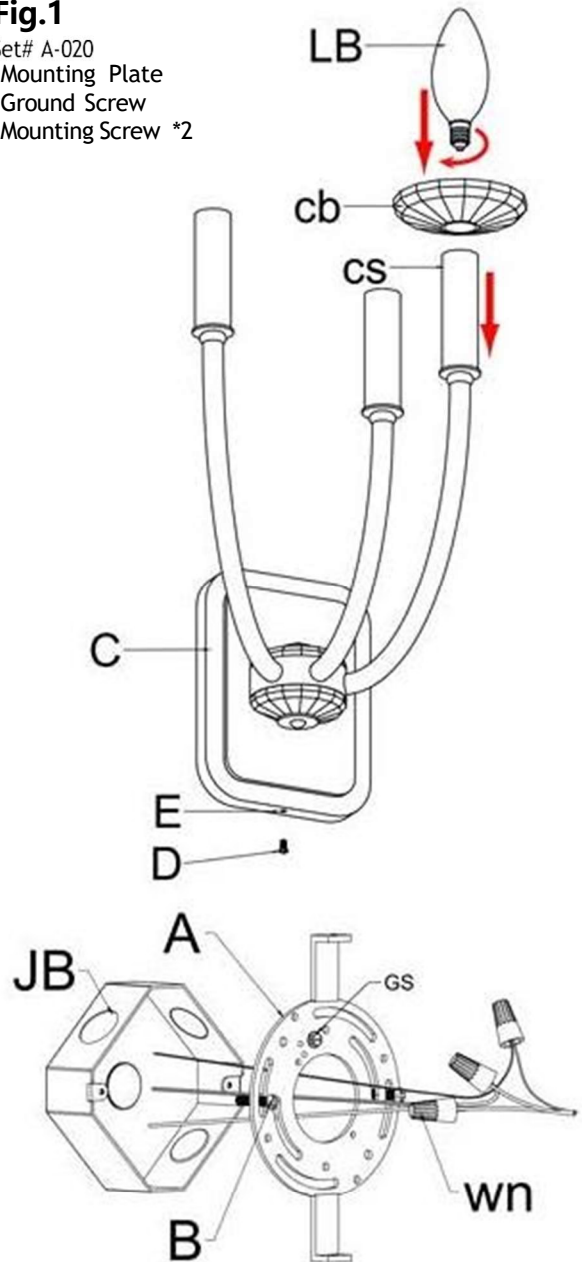


Fig. 2

