
Model: enCUBE1.8

Portable Battery Inverter Generator

KOHLER®

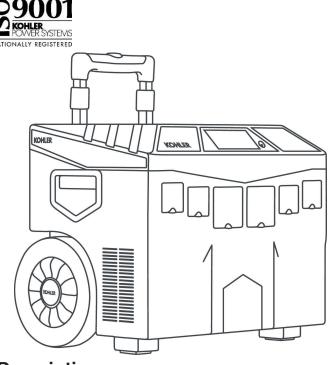

Description

The enCUBE™ is an indoor/outdoor portable battery inverter generator, ideal for camping, tailgating, job site usage or home backup during an outage. Producing 120 VAC and 5 and 12 VDC power, the enCUBE can be used to power up to 1440 continuous watts, 1800 maximum watts. Rechargeable either through a 120 V power cord plugged into a standard wall outlet or optional solar panels available in 60 W and 150 W sizes.

Standard Features

Portable

Designed for power on the go, enCUBE comes with a built-in retractable handle, wheels and recessed side handles.

Safe Design

With no engine or fueling, enCUBE is a clean power source with no emissions. Unlike traditional engine-powered generators, enCUBE can be safely used indoors. GFCI-protected AC outlets and low voltage auto shutdown protect your items and the battery.

Rechargeable

Recharges from a standard 120 V wall outlet (cord included) or optional solar panels available in 60 W and 150 W configurations. Can be charged and discharged simultaneously.

Control Panel

4 inch LCD display provides real time status on power inputs, outputs and runtime available.

Silent


Unlike engine-powered generators, enCUBE is powered by a battery and operates without noise.

Storage

Built-in storage lid provides place for keys, power cords and personal electronics.

- UL 1778 / CSA listed / NEMA 1 Indoor Rated
- 3-Year Limited Warranty*

Control Panel

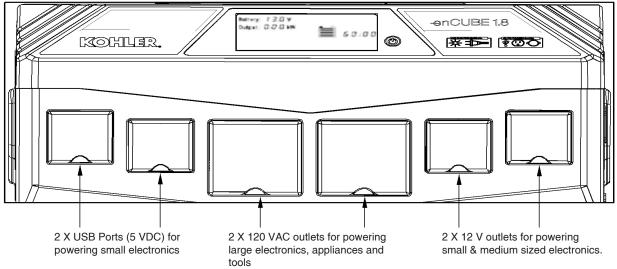

^{* 90-}day warranty if used in preferred condition.

Performance Specifications

Parameter	Inverter
Voltage	120 VAC
Frequency	60 Hz
Continuous Output	1440 W (12 A)
Maximum Output	1800 W (15 A) 10 min 3600 W (30 A) 300 ms
Output Waveform	Modified Sine Wave
Operating Temperature Range	0°C - 40°C (32°F-104°F)
Protection	 Low Battery Voltage Shutdown High Temperature Protection Overload Protection Short Circuit Protection GFCI Protection
Battery Type	Maintenance free sealed AGM lead acid battery
Battery Size	12 V 100 AH
Battery Weight	67 lbs
Terminal Type	T11
Parameter	AC Charging Input
AC Charging Input	90-130 VAC
Charging Process	Three Stage Process - Bulk Stage - Absorption Stage - Float Stage
Exchange Efficiency	>75%
Parameter	DC Charging Input
DC Charging Input (Solar Panels)	10-24.5 VDC
Charging Process	Three Stage Process - Bulk Stage - Absorption Stage - Float Stage
Exchange Efficiency	>95%
Fuse	One 20 A / 32 VDC fuse protecting the DC input terminal
Parameter	Charging Times
	Under 13 Hrs* (Over time, battery
120 VAC	may build up resistance and take longer to fully charge)
120 VAC Solar Charging	· ·
	longer to fully charge) 24+ hours depending upon region

Box Contents

- Battery Inverter
- 120 V, 6 Foot Power cord
- Operation Manual


Available options

- 25 Foot Solar Panel Connection Cord
- 60 Watt Solar Panel
- 150 Watt Solar Panel
- Panel Parallel Connector Kit

NOTE: Panels can be combined for maximum charging (limited to 240 watts)

Generator Set Dimensions and Weights

A mm (in.):	406 (16)	Weights lbs (kg)
B mm (in.):	470 (18.5)	Gross weight: 116 (52.6)
C mm (in.):	991 (39)	Net weight: 109 (49.4)
D mm (in.):	356 (14)	
E mm (in.):	559 (22)	





NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.



© 2015 and 2016 by Kohler Co. All rights reserved.