NO.XD2112 INSTALLATION INSTRUCTION

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

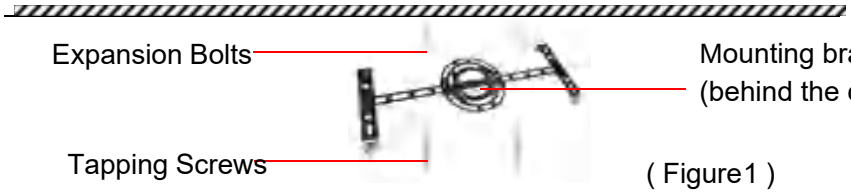

(Figure1)

Please refer to page 2 for detailed instructions on installing the mounting bracket

Frame Assembly:
Insert the screws on the wires into the holes in the ceiling plate, then tighten the nuts securely.

(Figure 2)

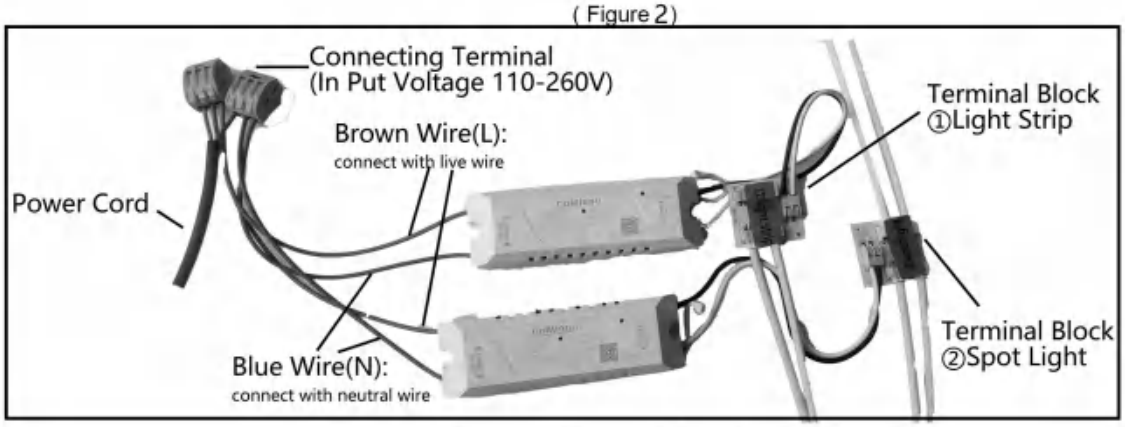

(Figure 3:Plug and Driver)

Installation Steps:

1. Install the mounting bracket.
2. Remove the protective film from the surface of the light fixture. Avoid using knives or sharp tools to prevent scratching the fixture or damaging the wire insulation.
3. Secure the accessories to the ceiling plate as shown in Figure 2.
4. Test circuit: Connect the power wires with a temporary wire to test if the light is working properly before installing it to the ceiling.
5. Installation:Install the lamp body to the mounting bracket, and connect the power wires with the connecting terminals.
6. Turn on the power and double-check; the installation is complete.

Warning!

1.Installation should be performed by a professional.
2.To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3.This light fixture operates within a 110V to 260V range only.
4.Do not install the light fixture in damp conditions.
5.Keep the light fixture away from acidic and corrosive materials.

Pull the orange clip up to 90 degrees, insert the wire, then push the clip down to securely clamp the wire.

(figure 5)

Details of accessories



1 Mounting Bracket *1

2 Tapping screw *4

3 Expansion bolt *4

4 Flat washer *4

5 Screw for Mounting Bracket *4

6 25mmL Screw *4

7 Spotlight*4

Installation instructions for mounting bracket

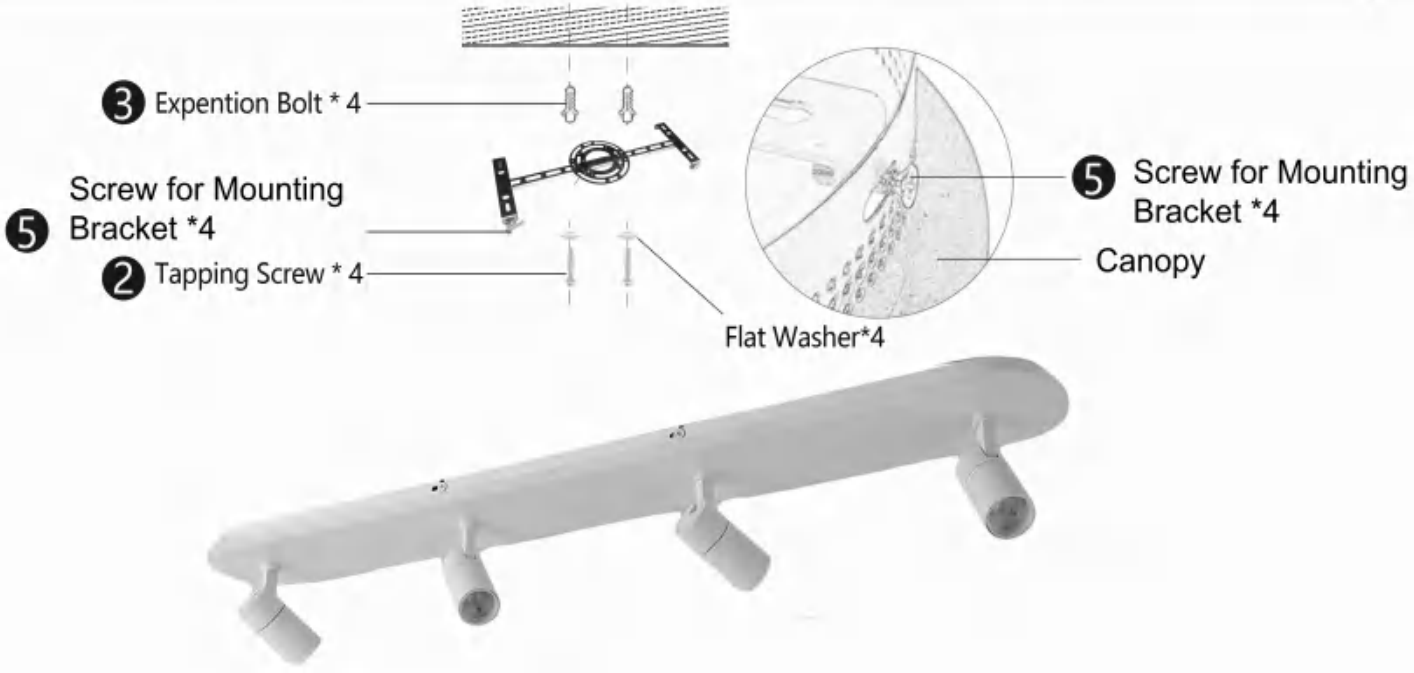

Steps to Install the Mounting Bracket

Step 1: Position the mounting bracket on the ceiling to determine the lighting location, and mark the screw holes using a marker pen.
Step 2: Use an electric drill to drill holes at the marked locations, then insert expansion bolts into the holes using a hammer.
Step 3: Secure the mounting bracket to the expansion bolts using tapping screws (each tapping screw should be accompanied by a flat washer).
Step 4: Assemble the lighting frame using double-ended metal tubes. Test the electrical connections before mounting to the ceiling.
Step 5: Connect the lamp driver to the ceiling power cord, then securely attach the lamp to the mounting bracket using screws.