Installation Sequence Diagram

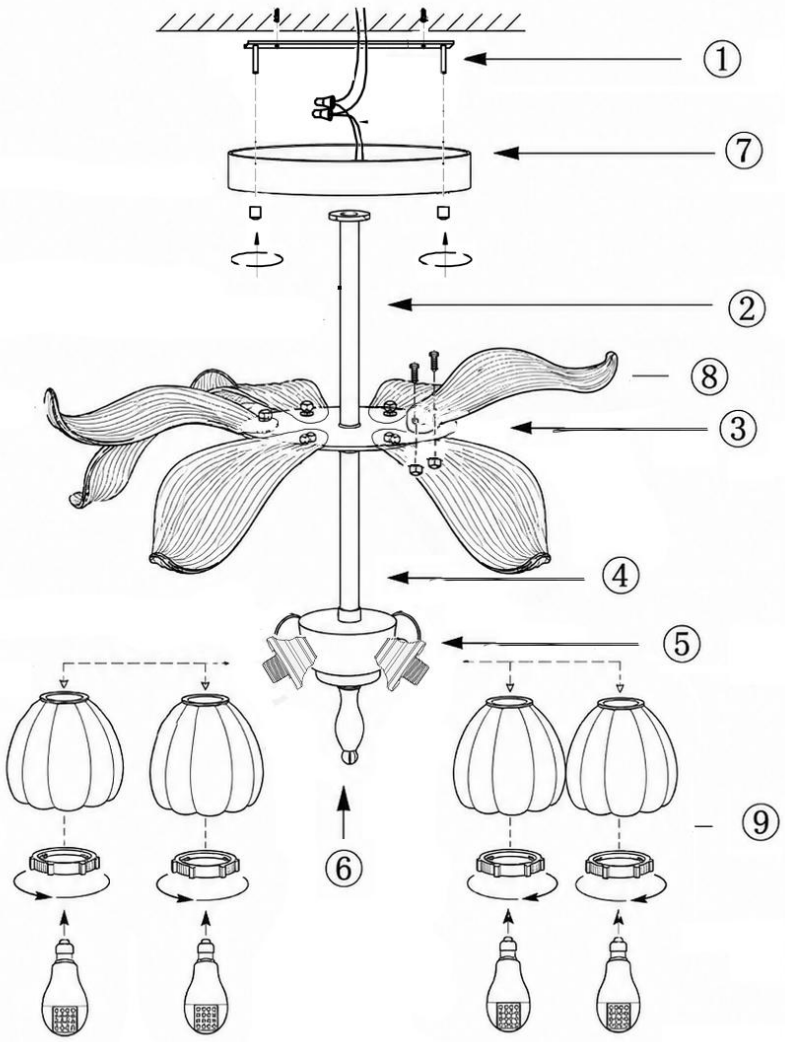

Please complete the assembly in sequence:

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Step 1 – Install the Mounting Bracket
Secure ① Mounting Bracket to the ceiling junction box using the supplied mounting screws. Ensure the bracket is firmly fastened before proceeding.

Step 2 – Assemble the Fixture Body
Assemble ② Upper Downrod, ③ Center Plate, ④ Lower Downrod, ⑤ Lamp Holder Assembly, and ⑥ Decorative Finial by tightening each component securely.
Route the main power cable through the downrods during assembly.
Inside the ⑤ Lamp Holder Assembly, connect the internal fixture wires to the main power cable. Secure all wire connections with the supplied wire connectors (wire nuts), then wrap each connection with electrical tape for additional insulation.

Step 3 – Install the Fixture to the Ceiling
Connect the fixture wires to the household power supply.
Black (Live) → Black (Live) White (Neutral) → White (Neutral)
Secure each connection with the supplied wire connectors, then wrap with electrical tape.
After wiring is complete, fasten the assembled fixture body to ⑦ Ceiling Canopy, then secure the canopy to ① Mounting Bracket using the canopy screws.
The main fixture installation is now complete.

Step 4 – Install the Glass Petals
Attach each ⑧ Glass Petal to ③ Center Plate.
Align each glass petal with its mounting holes and secure it using the supplied screws.
Tighten all screws evenly until the glass petals are firmly fixed to the center plate.

Step 5 – Install the Glass Shades
Remove the threaded retaining ring from each ⑤ Lamp Holder.
Position ⑨ Glass Shade onto the lamp holder, then reinstall and tighten the retaining ring to secure the glass shade in place.
Repeat for all lamp holders.

Step 6 – Install the Light Bulbs
Install the recommended light bulbs into each lamp holder.
Do not exceed the maximum wattage specified on the fixture label.

Step 7 – Installation Complete
Restore power at the circuit breaker and switch on the light to verify proper operation.
Your fixture is now fully installed and ready for use.