


Night Stand

Assembly Instructions

Contains One Night Stand and Hardware

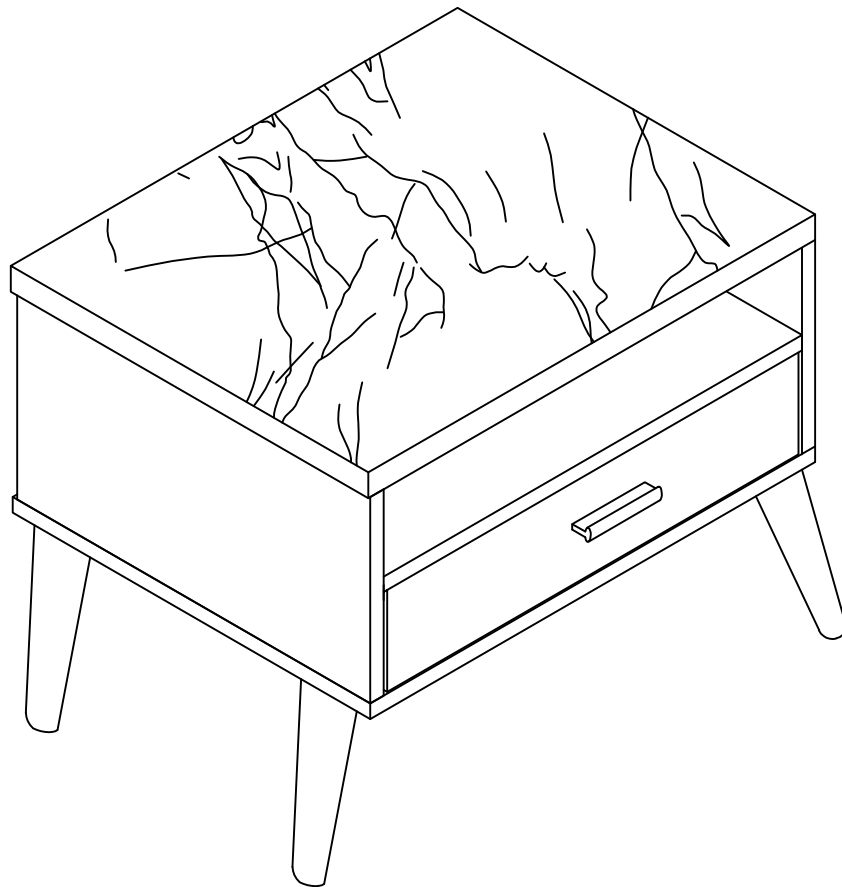


Night Stand
Contains One (1) Night Stand and Hardware

IMPORTANT NOTE:
Carefully remove all the parts from the box. Arrange on a flat surface and verify you have all of the following parts and hardware


TOOLS REQUIRED:
-Phillips Screwdriver

PARTS LIST


1.Top Panel (1 PC)

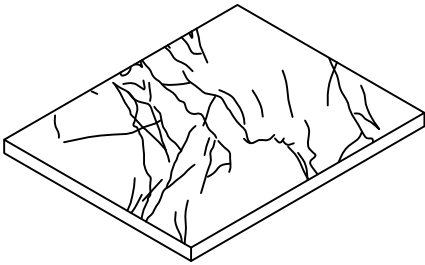


2.Middle Panel (1 PC)

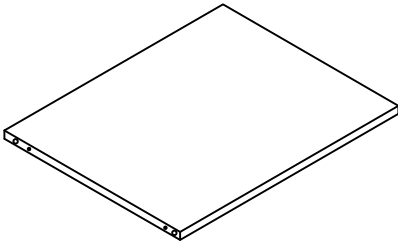


3.Bottom Panel (1 PC)

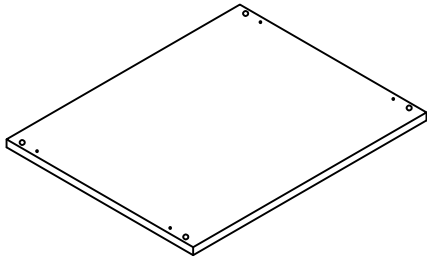


4.Left Side Panel (1 PC)



5.Right Side Panel (1 PC)




6.Back Panel (1 PC)




7.Legs (4 PCS)




8.Drawer Front Panel (1 PC)




9.Drawer Bottom Panel (1 PC)

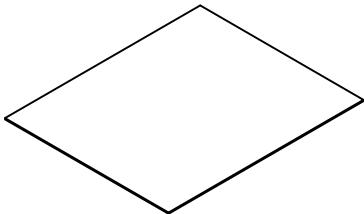


10.Drawer Left Side Panel (1 PC)



11.Drawer Right Side Panel (1 PC)




12.Drawer Back Panel (1 PC)




HARDWARE LIST


A.Allen Key (1 PC)

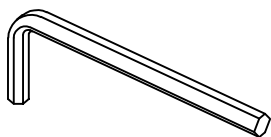


B.Dowel (12 PCS)




C.JCBC W Screw 40mm (4 PCS)



D.Minifix Bolt (8 PCS)




E.Minifix House (8 PCS)




F.Minifix Cap (8 PCS)




G.Screw 20mm (16 PCS)




H.Screw 16mm (20 PCS)




I.Screw 50mm (8 PCS)




J.Handle Screw 40mm (2 PCS)




K.Mounting Leg (4 PCS)




L.Handle (1 PC)



M.Drawer Slider (1 SET)




N.L Bracket (4 PCS)



ASSEMBLY INSTRUCTIONS


STEP 1

Tap Dowels (Part B) into the Middle Panel (Part 2), Left and right side panels (Parts 4 & 5) in the larger holes provided.

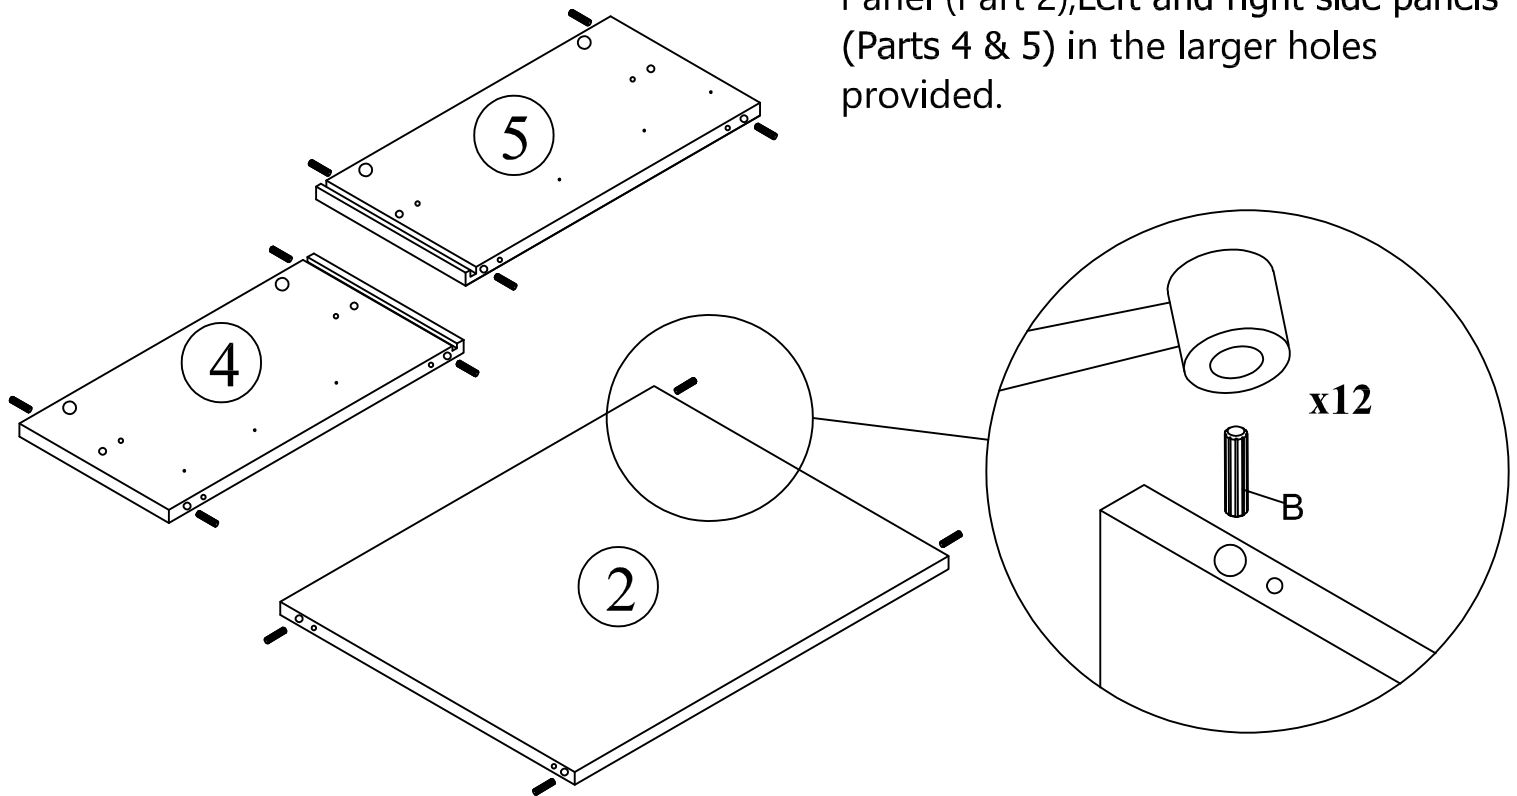


STEP 2

Using a Phillips Head Screwdriver, attach Minifix Bolts (Part D) to the Panels (Parts 2,3 and 5).



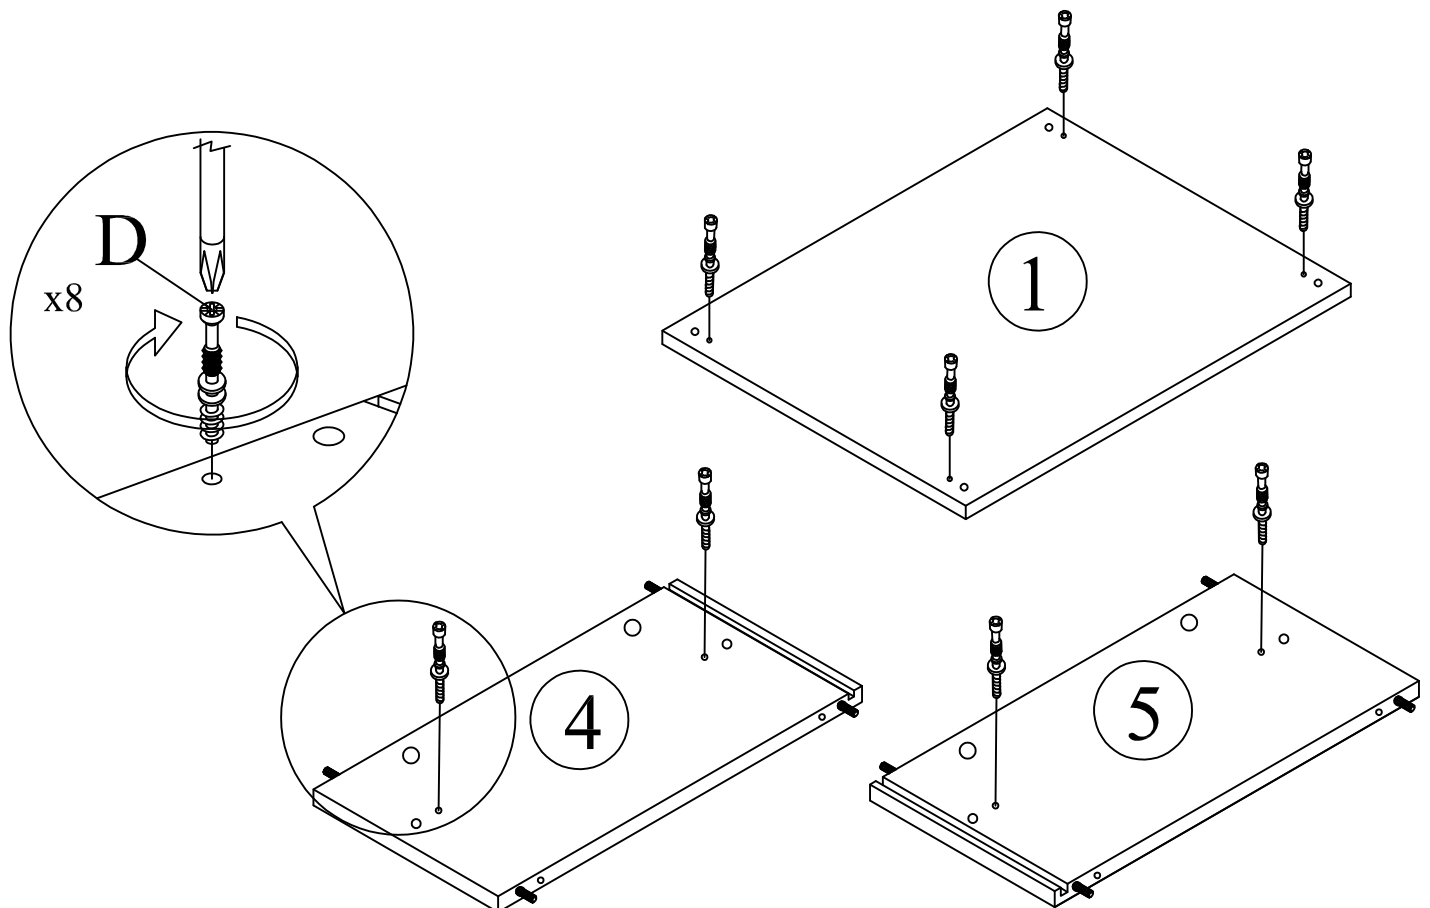


ASSEMBLY INSTRUCTIONS


STEP 3

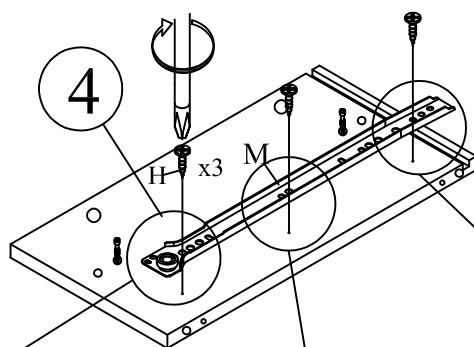




Attach the Drawer Slider (Part M) to the Left Side Panel (Part 4) using Screw 16mm (Part H). Follow the Pilot Hole as marked.

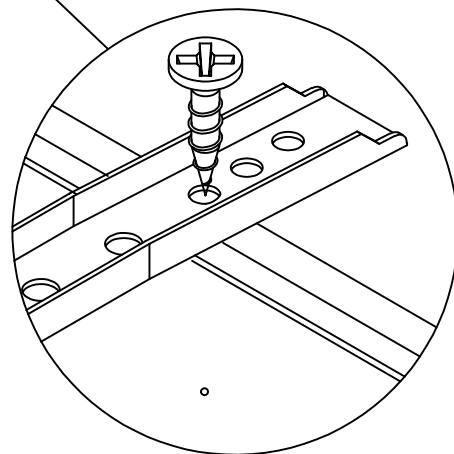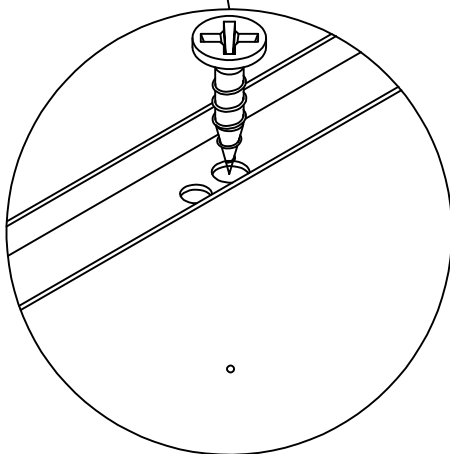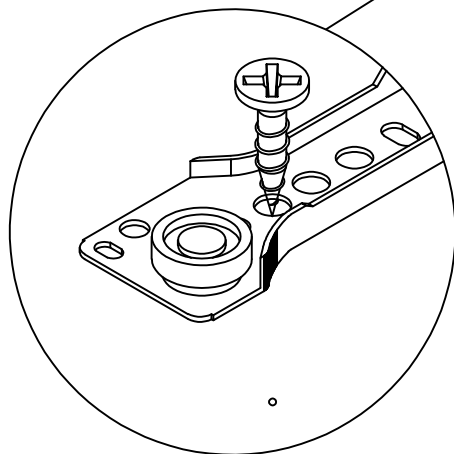

STEP 4

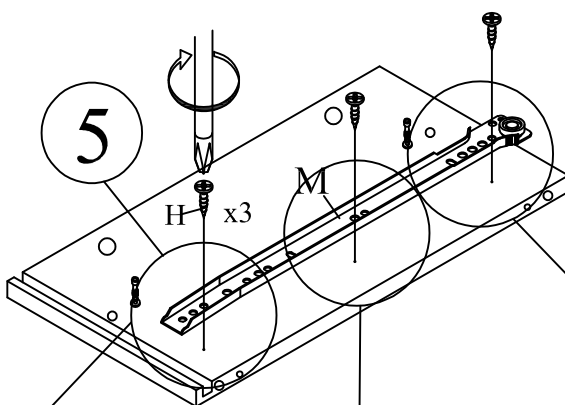


Attach the Drawer Slider (Part M) to the Right Side Panel (Part 5) using Screw 16mm (Part H). Follow the Pilot Hole as marked.

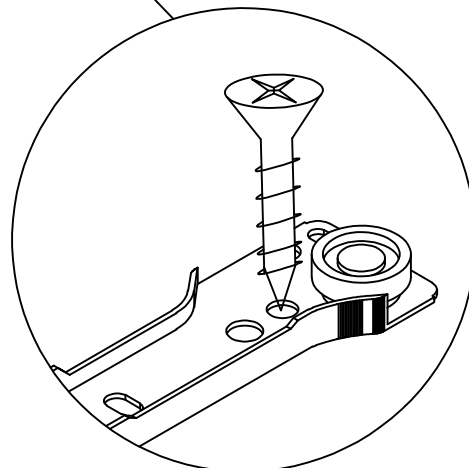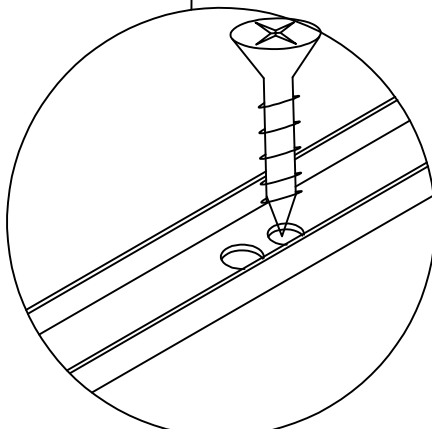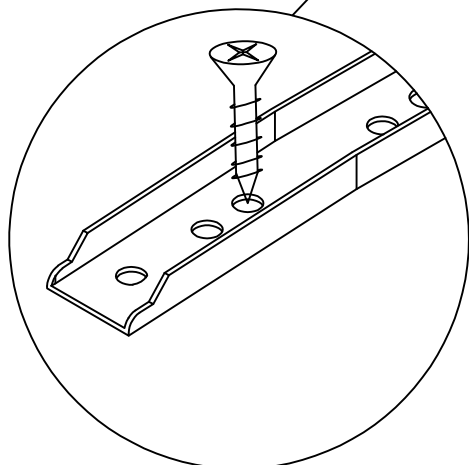

ASSEMBLY INSTRUCTIONS




STEP 5

This is how a mini fix works...



The head of the mini fix housing goes into the open mouth of the mini fix bolt. You then turn the mini fix housing so it tightens over the mini fix bolt.


Insert the minifix house to the Middle Panel (Part 2) and make sure the open side of the Minifix House (Part E) is facing the opening on the left and right middle panels, then attach the Middle Panel (Part 2) to the Right Side Panel (Part 5) as shown. Turn the Minifix House (Part E) to tighten using the Allen Key or screwdriver. Cover the Minifix House using the Minifix Cap (Part F) by pressing it into the Minifix House.

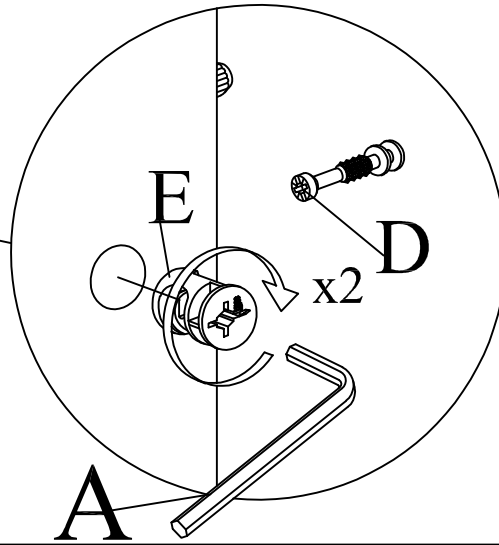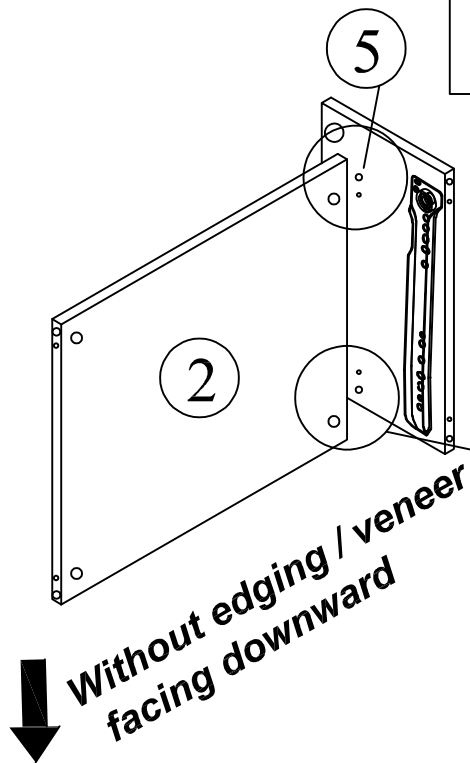

*Attach Minifix Cap as shown.




STEP 6

This is how a mini fix works...



The head of the mini fix housing goes into the open mouth of the mini fix bolt. You then turn the mini fix housing so it tightens over the mini fix bolt.

Insert the Minifix House (Part E) to the Middle Panel (Part 2), make sure the open side of the Minifix House (Part E) is facing the opening side. Attach the Left Side Panel (Part 4) to Middle Panel (Part 2) as shown. Turn the Minifix House (Part E) to tighten using the Allen Key or screwdriver. Cover the Minifix House using the Minifix Cap (Part F) by pressing it into the Minifix House.

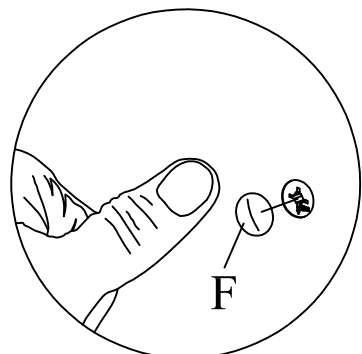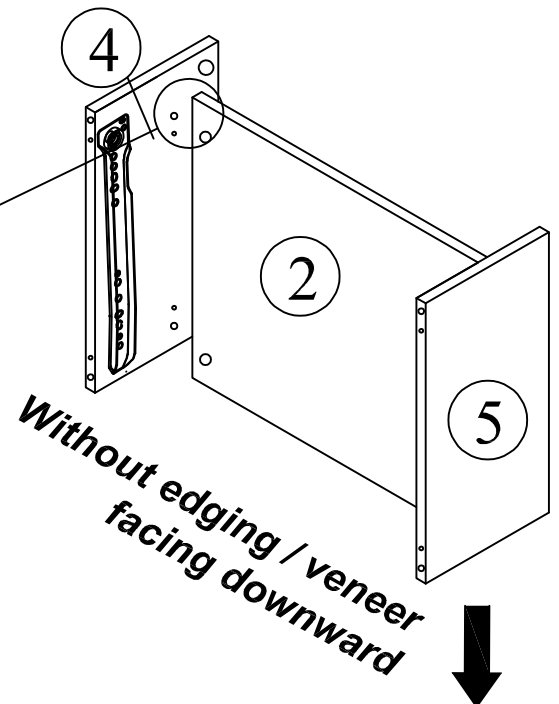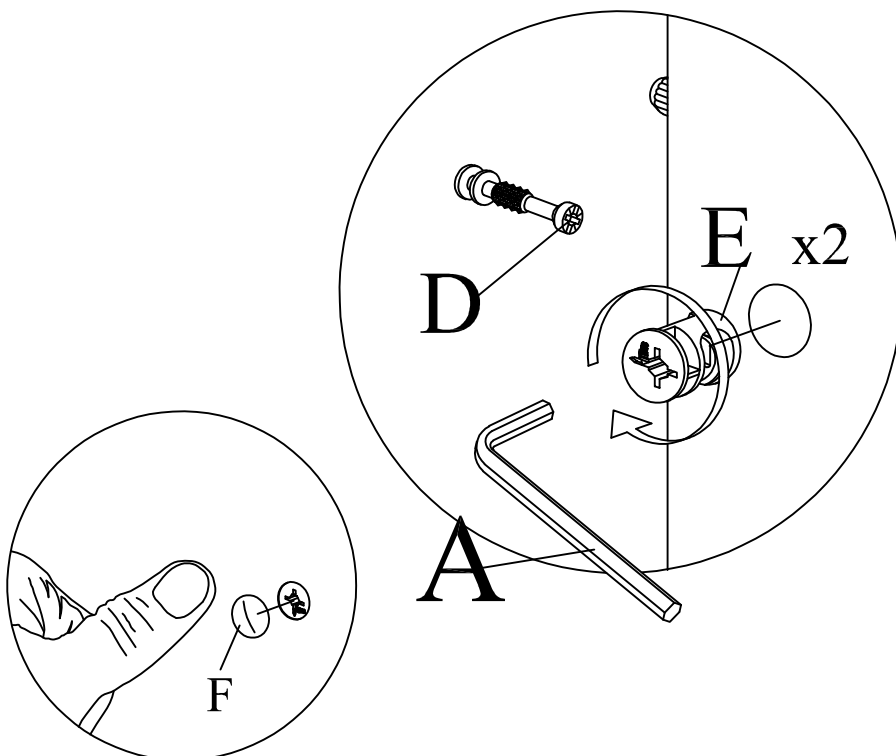

*Attach Minifix Cap as shown.


ASSEMBLY INSTRUCTIONS

STEP 7

This is how a mini fix works...




The head of the mini fix housing goes into the open mouth of the mini fix bolt. You then turn the mini fix housing so it tightens over the mini fix bolt.

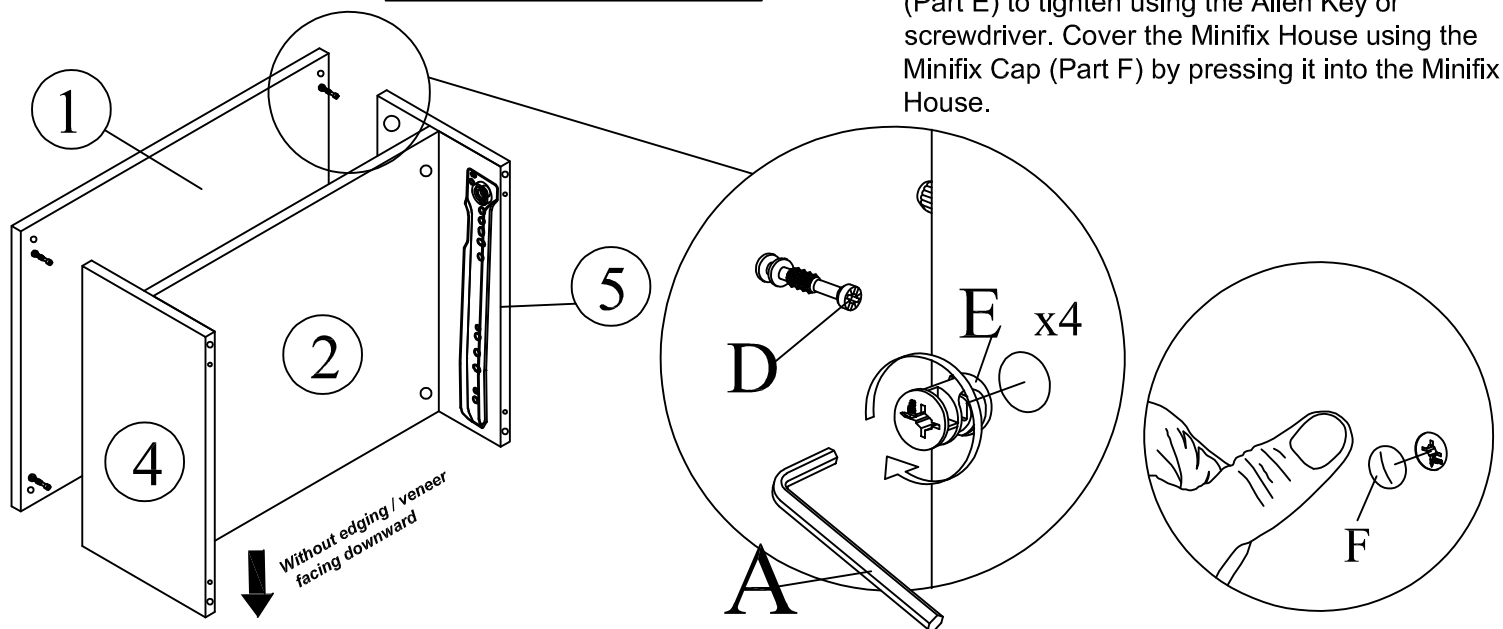

STEP 8


Insert the Back Panel (Part 6) into the back of the nightstand by sliding the Back panel into the slots provided.

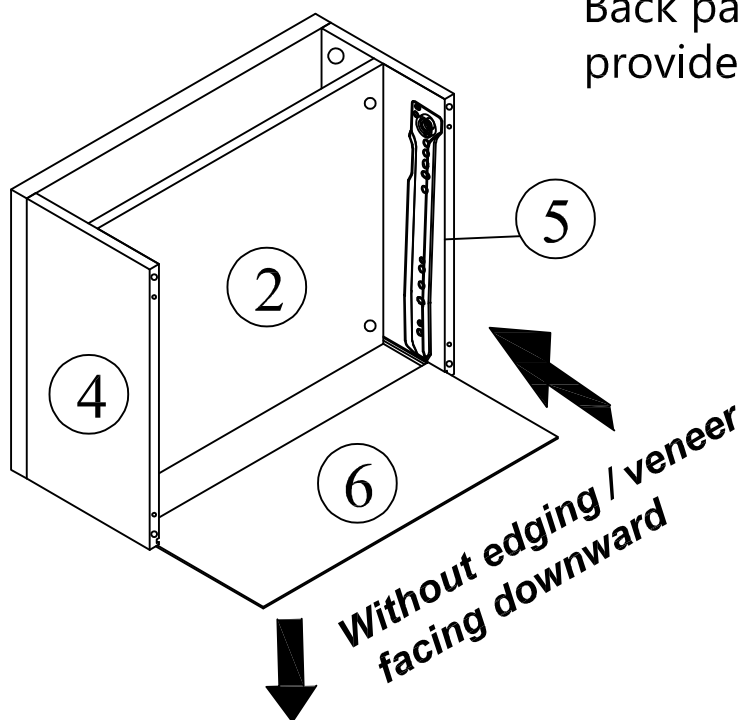

ASSEMBLY INSTRUCTIONS


STEP 9

Attached the Bottom Panel (Part 3) to the bottom of the Nightstand using 4 JCBC W 40mm screws (Part C). Tighten using Allen Key (A).

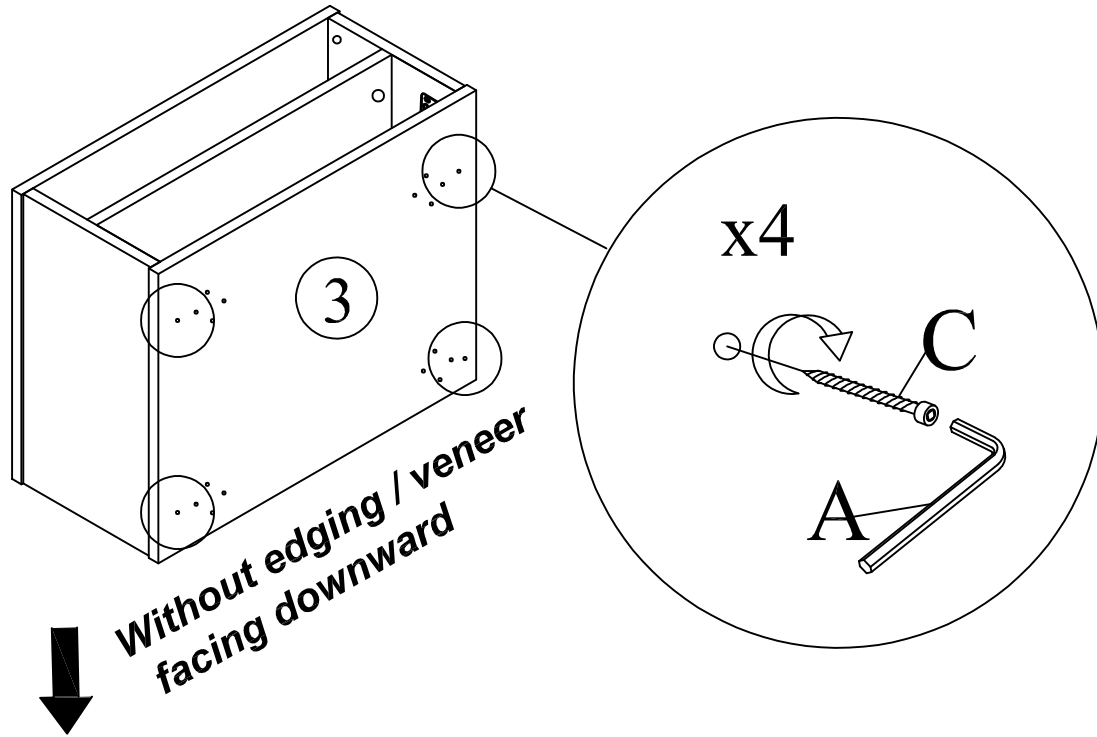

STEP 10


Attach the Mounting Legs (Part K) with Screw 20mm (Part G). After assembling the Mounting Legs, assemble the Legs (Part 7) as shown by turning the legs clockwise until tight.

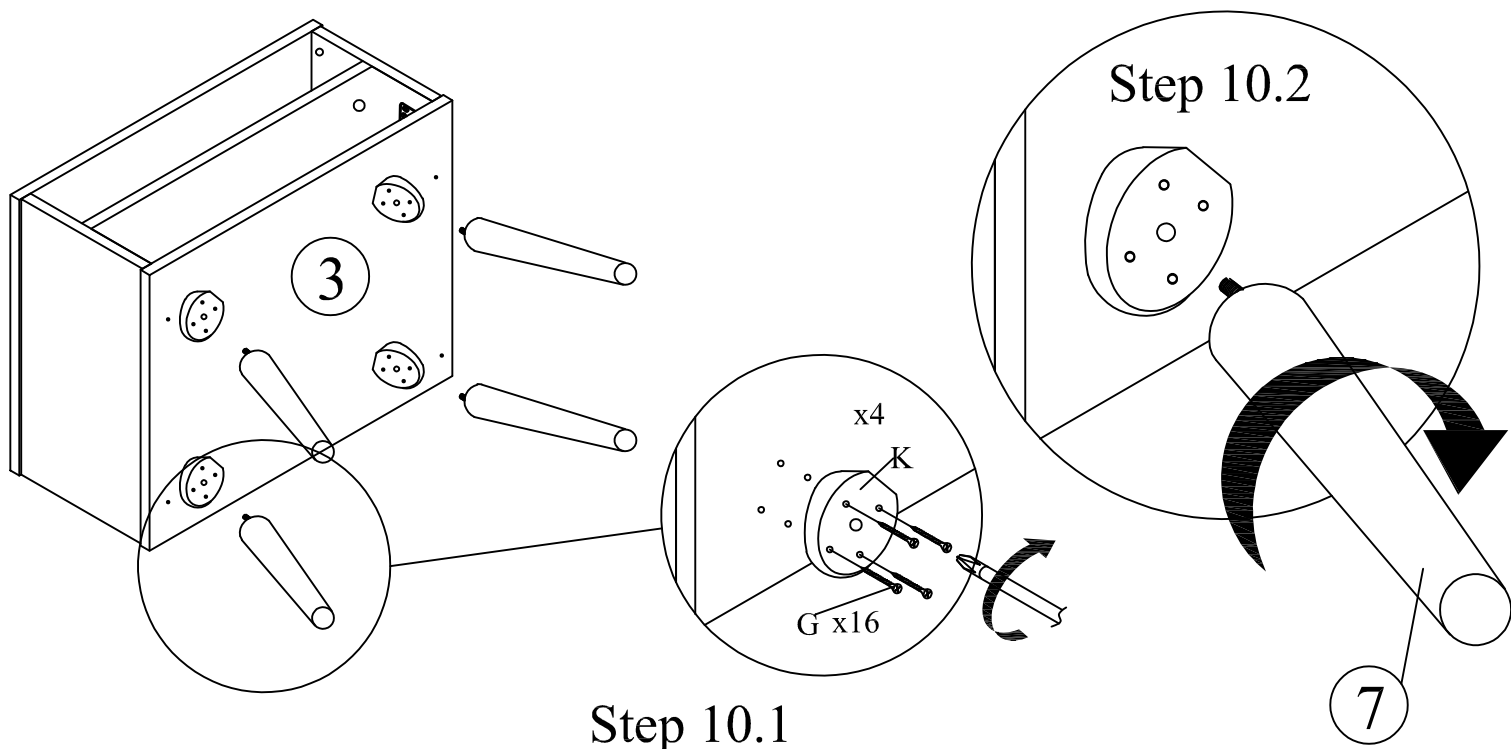

ASSEMBLY INSTRUCTIONS


STEP 11

Attach L Bracket (Part N) to each corner of the Back Panel (Part 6) using Screw 16mm (Part H) as shown.

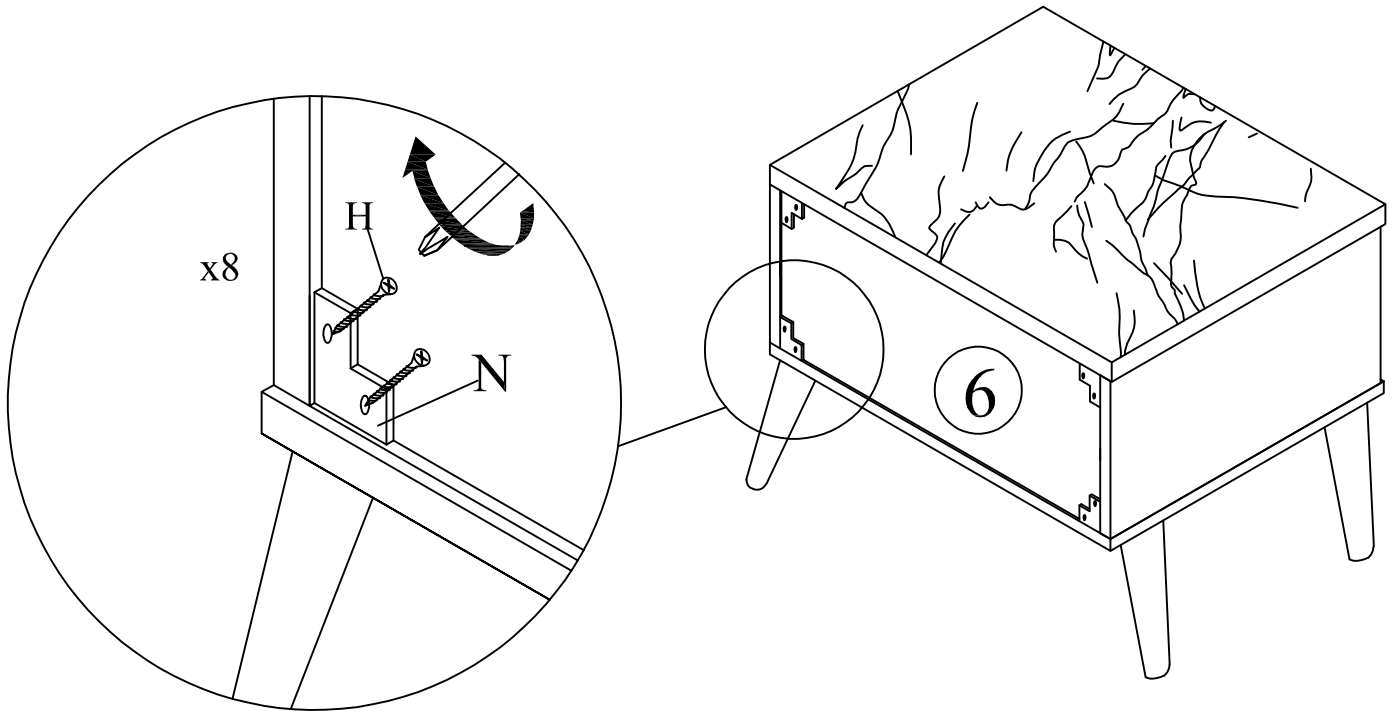


STEP 12

Attach the Left and Right Drawer Side Panels (Part 10 and 11) to the Drawer Front Panel (Part 8) using Screw 50mm (Part I). Insert the Drawer Bottom Panel (Part 9) as shown. Attach Drawer Back Panel (Part 12) by using the Screw 50mm (Part I) as shown.

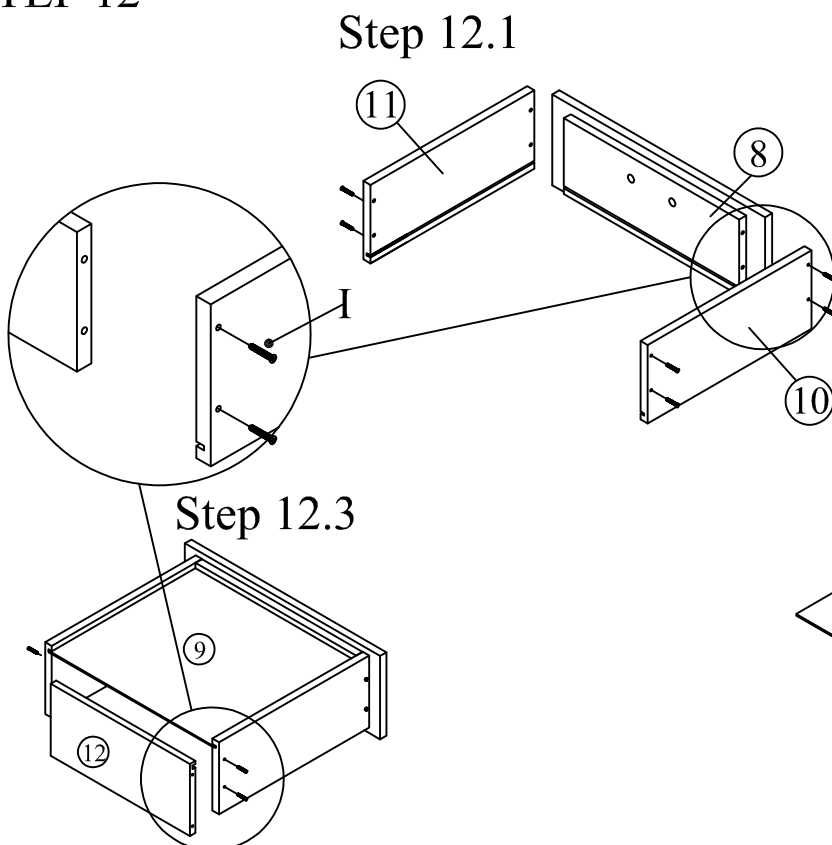


Step 12.2

Back View

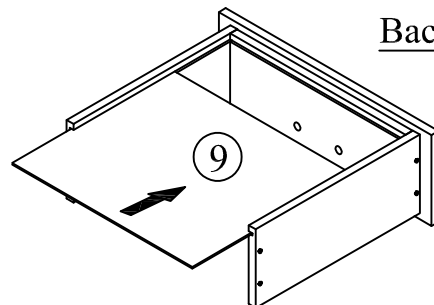


ASSEMBLY INSTRUCTIONS

STEP 13

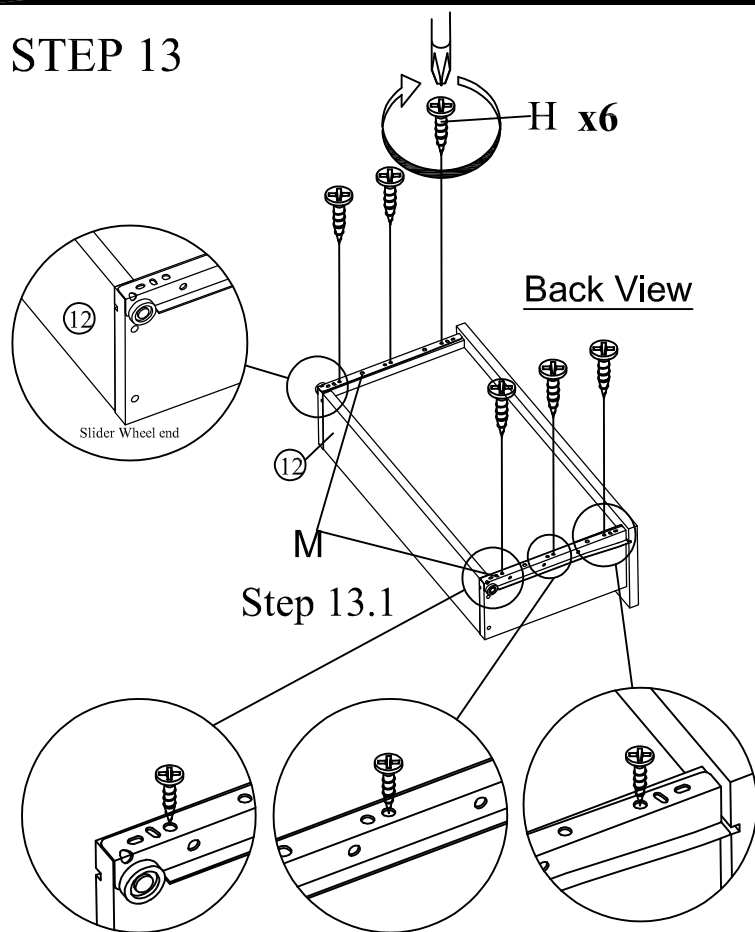


Attach Screw 16mm (Part H) to Slider (Part M) as shown. Tighten Handle (Part L) using Screw (Part J). Attach Handle (Part L) to the Drawer Front Panel using Handle Screw 40mm (Part J). Tighten the screws.

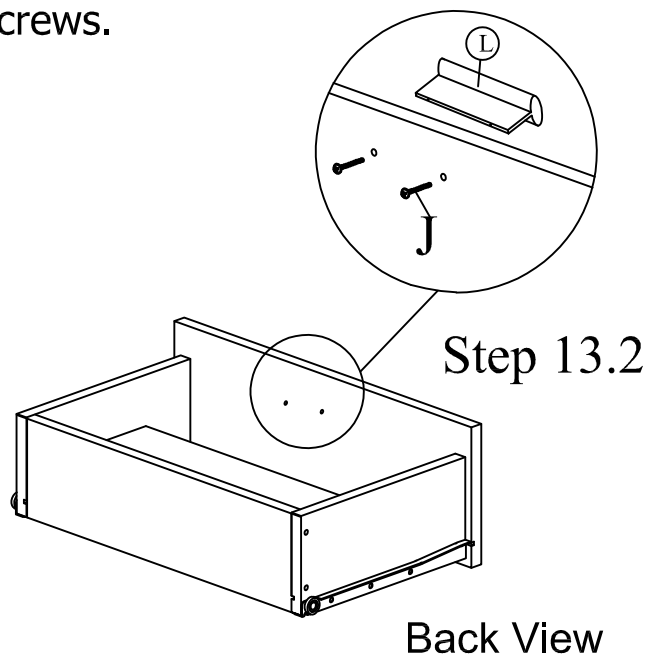

STEP 14

Insert the drawer into the nightstand

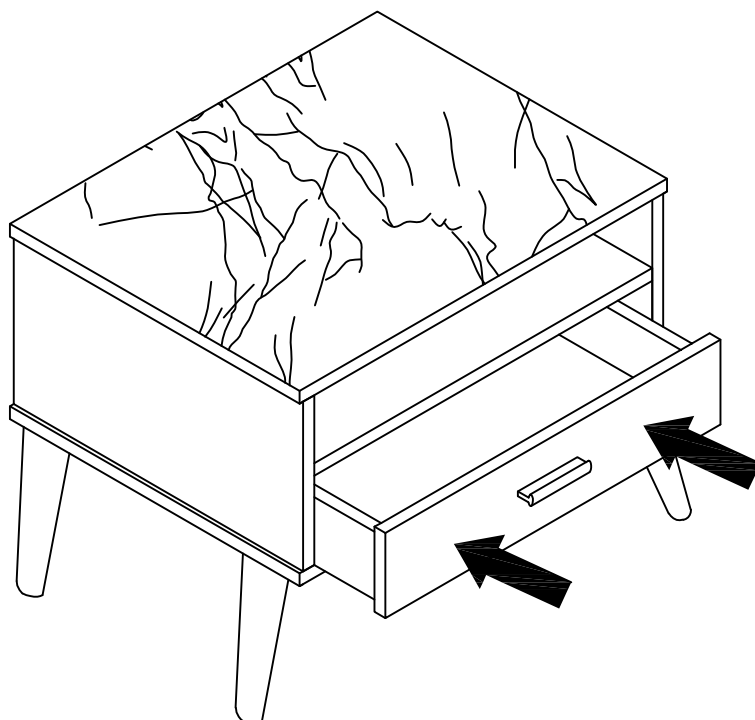

ASSEMBLY INSTRUCTIONS

YOUR NIGHTSTAND IS NOW READY FOR USE

