


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

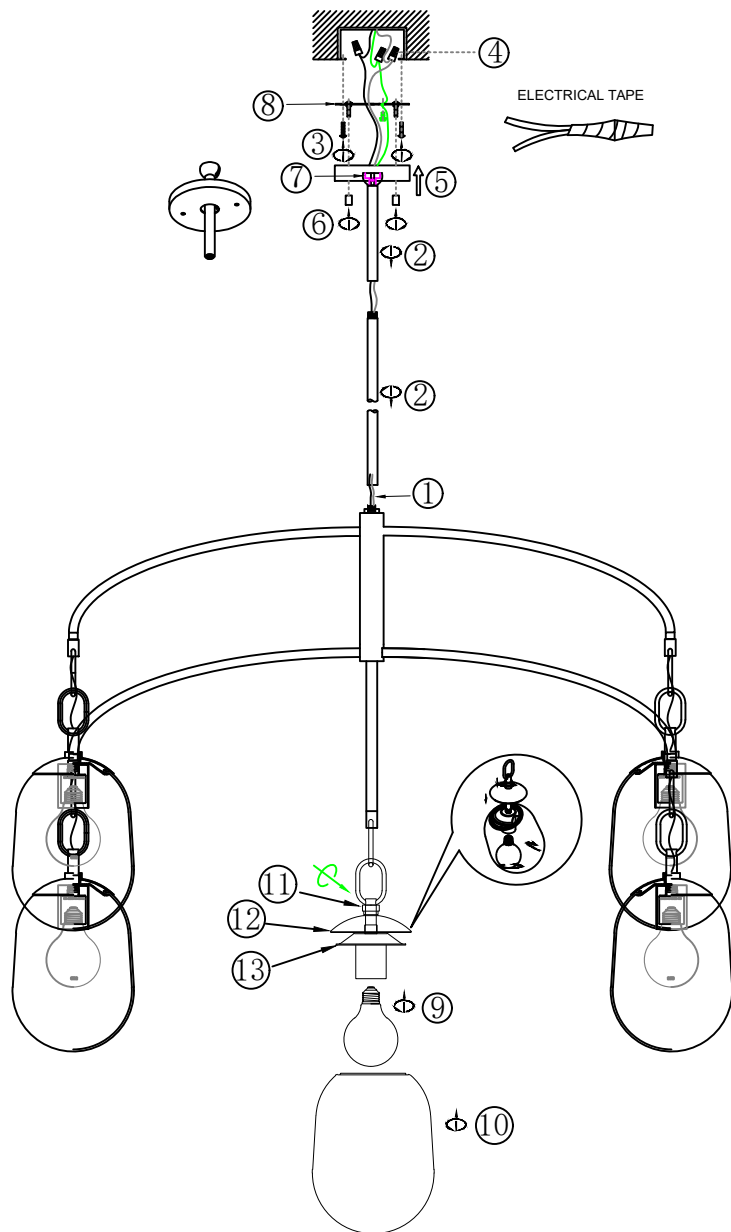

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Thread the main wire (1) through the suspension rods (2), canopy (5), and swivel adapter (7), then tighten the upper rod (2) onto the lamp body.
(Splice the length of rods as needed for the height.)
2. Secure the mounting plate (8) to the US standard junction box using screws (3).
3. Connect supply and fixture wires using wire nuts (4).
· Notice: Black (Live) wire to Black wire. White (Neutral) wire to White wire. Ground wire to the Grounding Terminal.
- Ensure no exposed wire remain after connections.
4. Place the canopy (5) over the mounting bracket (8) and tighten it with the decorative nuts (6).
5. Install the bulbs (9) onto the lamp holder (Bulbs Not Included).
6. Tilt and rotate the glass shade (10) to align its opening with the mounting notch hardware (13).
7. Place the saucer cover (12) onto the top of the glass shade (10) and secure using the decorative nut (11).
8. Restore power and verify bulb operation.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.