


Assembly and Installation Instructions

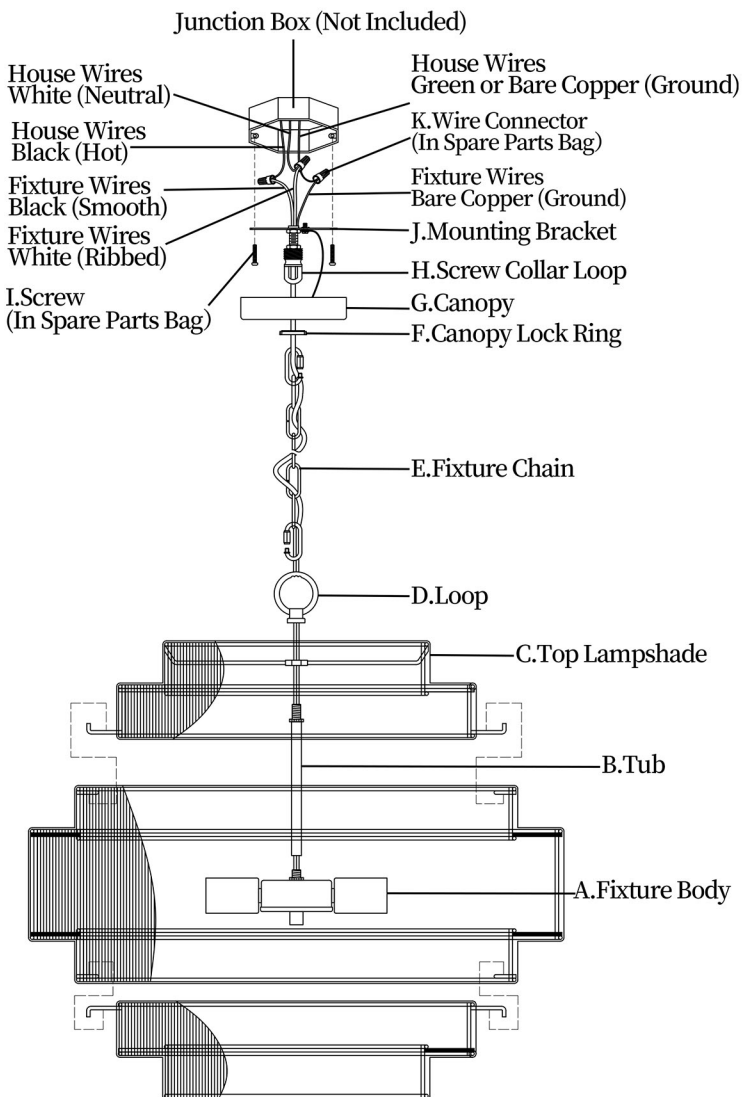

Tools Required

- Step ladder
- Phillips head screwdriver
- Pliers
- Wire strippers
- Voltage tester
- Measuring tape (to adjust height)

Package Contents

- Fixture Body x 1 & Lampshades x 3
- Loop x 1 & Fixture Chain x 1
- Canopy x 1 & Canopy Lock Ring x 1
- Mounting Bracket x 1
- Spare Parts Bag x 1
- Assembly and Installation Instructions x 1

Product Specifications

6-Light Chandelier

Requires 6 medium base (E26) bulbs,
max 60W each (bulbs not included)

Voltage: 120V

Assembly Instructions

1. Unpack the fixture carefully, checking all parts for completeness and free of damage. If you find any missing or damaged parts, please reach out at your earliest convenience for a resolution.
2. Prior to assembly, use the measuring tape to decide on the desired length of the chain for optimal hanging height.
3. Attach the tube (B) to the fixture body (A), ensuring not to pinch any wires.
4. Thread the fixture wires through the top lampshade (C), loop (D) and fixture chain (E), securing loop (D) to the tube (B).
5. Set aside the canopy (G) and canopy lock ring (F) after loosening the canopy lock ring (F).

Warning

1. To prevent electrical shock, always turn off the power at the circuit breaker before installing or servicing this chandelier.
2. It is recommended to consult a professional electrician to ensure the branch circuit conductor is correct and for help with complex installations.
3. For added safety during installation, consider wearing appropriate protective gear such as gloves and safety glasses.
4. It's recommended to have an assistant for handling and securing the chandelier during installation.

Installation Instructions

1. Before beginning installation, use a voltage tester to confirm that power is no longer reaching the junction box. Additionally, check that the junction box is secure and that there are no exposed wires.
2. Attach the mounting bracket (J) to the ceiling junction box securely with the provided screws (I).
3. Carefully thread the fixture's wires through each component in this order: the canopy lock ring (F), the canopy (G), the screw collar loop (H), and finally the mounting bracket (J).
4. **Wire Connection Steps:**
 - a. Locate the wire connectors (K) supplied with the fixture.
 - b. Attach the fixture's ground wire to the green screw on the mounting bracket (J). To do this, wrap the ground wire clockwise around the green screw, ensuring that the wire is securely in contact with the screw. Tighten the screw firmly to hold the ground wire in place. **Make sure that there is enough excess ground wire to allow for a secure connection to the house's ground wire.**
 - c. Take the house wire end and the fixture wire end, black (hot) to black (smooth), white (neutral) to white (ribbed), and green/bare copper (ground) to bare copper (ground).
 - d. Align the two ends and insert them together into the wire connector (K). Once they are in place, twist the connector (K) until it feels tight. A good indication of secure connection is when the wires remain connected when tugged lightly. Repeat the process for each wire pair.
5. Gently raise the canopy (G), moving it along the screw collar loop (H) towards the ceiling. Secure it firmly in place using the canopy lock ring (F) onto the screw collar loop (H).
6. Connect one end of the fixture chain (E) to the screw collar loop (H). Ensure the chain is properly hooked and secured to avoid any risk of the fixture falling.
7. Once the chandelier is secure, carefully screw in the light bulbs, ensuring not to exceed the recommended wattage.

8. Attach the remaining two lampshades in sequence. Make sure they are hooked and placed evenly.
9. Restore power at the breaker and maintain a safe distance from the fixture until it's confirmed to be functioning correctly. This measure is necessary for maintaining safety during the post-installation phase.

Friendly Reminder

1. When installing your new chandelier, it's perfectly normal if the chandelier initially appears uneven. Given the unique nature of the materials used, some slight variances are normal and add to the uniqueness of your piece. Please feel free to gently adjust the shades to achieve a harmonious balance.
2. If you encounter any difficulties during the installation process, never hesitate to seek assistance, we're committed to ensuring your installation process is as smooth and successful as possible.

Maintenance Instructions

1. Inspect the chandelier periodically for any loose connections or signs of wear and tear. Secure any loose parts and replace worn out components promptly to enhance its longevity.
2. Clean with a soft, dry cloth, a feather or microfiber duster. Avoid using liquid cleaners or abrasive materials.
3. When replacing bulbs, ensure the chandelier is switched off and cooled down before handling. Use bulbs of appropriate wattage to prevent heat damage.
4. This chandelier is intended for indoor and dry conditions only. Exposure to outdoor or moist environments can lead to damage.