## **Gas Cooktop Specifications**


GAS COOKTOPS	FFGC3625L	FFGC3613L	FFGC3603L	FFGC3025L
Colors	Stainless (S), Black (B), White (W)	Stainless (S), Black (B), White (W)	White (W)	Stainless (S), Black (B), White (W)
Width	36"	36"	36"	30"
Height	4-1/4"	2-7/8"	3-1/4"	4-1/4"
Depth	21-3/4"	18"	18-5/8"	21-3/4"
Features				
Controls	Ready-Select®	Ready-Select®	Ready-Select®	Ready-Select®
Surface Type	Deep-Well Stainless Steel (S), Deep-Well Color-Coordinated Porcelain (B / W)	Stainless Steel (S), Color-Coordinated Porcelain (B / W)	Color-Coordinated Porcelain (C)	Deep-Well Stainless Steel (S), Deep-Well Color-Coordinated Porcelain (B / W)
Sealed Gas Burners	Yes	Yes		Yes
Grates	Black Matte Finish on Continuous Cast Iron	Black Matte Finish on Cast Iron	Black Gloss Finish on Steel Round	Black Matte Finish on Continuous Cast Iron
Right Front Burner (BTU)	9,500	12,000	9,000	15,000
Right Rear Burner (BTU)	5,000	5,000	9,000	5,000
Left Front Burner (BTU)	9,500	9,500	9,000	9,500
Left Rear Burner (BTU)	9,500	9,500	9,000	9,500
Center XtraZone Burner (BTU)	15,000			
Control Location	Right Side	Center Front	Center Front	Right Side
Knob Color	Black (S), Color-Coordinated (B / W)	Black (S), Color-Coordinated (B / W)	Color-Coordinated	Black (S), Color-Coordinated (B / W)
Knob Type	Plastic	Plastic	Plastic	Plastic
Bowl Color	Black (S), Color-Coordinated (B / W)	Black (S), Color-Coordinated (B / W)	Chrome	
Certifications				
A.D.A. Compliant <sup>1</sup>		Yes	Yes	
Specifications				
Cut-out Height	8"	6-1/2"	6-1/2"	8"
Cut-out Width (Min.)	33-7/8"	34-1/4"	34-1/4"	27-1/4"
Cut-out Width (Max.)	34-1/4"	34-3/8"	34-3/8"	28-1/2"
Cut-out Depth (Min.)	19-1/8"	16-5/8"	16-5/8"	19"
Cut-out Depth (Max.)	19-3/4"	16-3/4"	16-3/4"	19-3/8"
Power Supply Connection Location	Right Rear	Right Rear	Center Front	Right Rear
Gas Supply Connection Location	Right Rear	Right Rear	Center Front	Right Rear
LP Gas Conversion Kit	Included	Included	Included	Included
Voltage Rating	120V / 60Hz / 15A	120V / 60Hz / 15A	120V / 60Hz / 15A	120V / 60Hz / 15A
Connected Load (kW Rating) @ 120 Volts <sup>2</sup>	0.8	0.8	0.8	0.8
Amps @ 120 Volts	1.0	1.0	1.0	1.0
Minimum Circuit Required (Amps)	15	15	15	15
Approved for Electric Single Wall Oven Combination Installation				
Approx. Shipping Weight (Lbs.)	60	40	30	45

## See pages 15 – 16 for Gas Cooktop images and features.

NOTE: Always consult local and / or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the Web at frigidaire.com.

We reserve the right to change specifications or discontinue models without notice.

## **Gas Cooktop Dimensions**

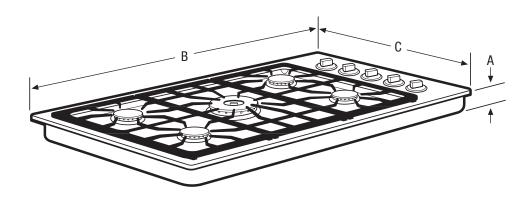

Product Dimensions	FFGC3625L	FFGC3613L	FFGC3603L	FFGC3025L
A — Height	4-1/4"	2-7/8"	3-1/4"	4-1/4"
B — Width	36"	36"	36"	30"
C — Depth	21-3/4"	18"	18-5/8"	21-3/4"

<sup>&</sup>lt;sup>1</sup> When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

 $<sup>^{2}</sup>$  For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.