

Constructed of premium stainless steel and clear tempered glass. Aluminum mesh filter or baffle filters that remove smoke and grease from your cooking area and is dishwasher safe. 2 bright soft white energy saver LED lights, low noise level operation, 300 CFM air flow, push button control with 3-level fan speed. All the components such as damper, mounting hardware, flexible duct work and damper are included for easy installation. Adjustable and telescoping chimney can fit 7.5 ft. - 8.5 ft. ceiling. This unit is convertible, can be vented out of your dwelling or recirculating (ductless) with charcoal filters (part # WRHF005S2, sold separately).

Size	Stainless Steel (30"/36	<u> </u>	Chimney Extension	Filter (replacement)	NON-DUCTED FILTERS
30 /36in	LRW01C30/LRW01C36; LRW010 LRW01C30BL (30" bla	C30D/LRW01C36D ack)	WRHCE01/WRHCE01BL	MSH1112 BFIL911	WRHF005S2

Specifications

	20/26" 200 CEM May Valagit:		
Description	30/36" 300 CFM Max Velocity		
•	Convertible Wall Mount Range Hood		
Mount Type	Wall Mount		
Size	29.3"/35.4" W x 18.7" D x 34.5" H		
Ceiling Height	7.5-8.5 feet		
Duct Dimension	6" round		
Product Weight	29.8/35.1 lbs.		
Exhaust Method	Convertible		
Exhaust Location	Тор		
Power Source	Plug in		
Voltage	120		
Amperage	1.5 A		
Residential Use Only	Yes		
Certification	ETL (compatible w/UL and CSA)		
Filter	Mesh Filter or Baffle Filters		
No. of Fan Speeds	3		
Speed Control Type	Push Button		
Max. Sound Level	65 dB		
No. of Lights	2 LED		
Bulb Wattage	2 W		
CFM	300 (Max Velocity)		
Compatible Ductless Filter	WRHF005S2		
Installation Hdwe. Incl.	Yes		
Flexible Duct Included	Yes		

Warranty

3-Year Limited on parts




E-Mail: support@winslyn.com

Scene Display



Plot of Static Pressure vs. Airflow

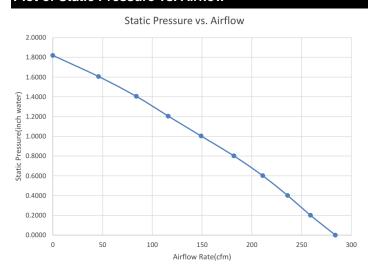

* Max velocity CFM of blower measure in open air environment*

Website:https://www.winslyn.com Company: Winslyn Industries



ADD:1850 East Fabyan Parkway Bativia, IL 60510